STUDER Digital Audio Processing
for D940, D941, Madi Router

Schemata / Circuit Diagrams

1. DS-PR Frame

2. Macha Board

3. Optical Madisoni / Coax Madisoni

4. Optical Madisono / Coax Madisono

5. Sommation Summing Board

6. Pap Plus Board

7. D19 M Rack

8. Madi Multiplexer MUX

9. Madi Demultiplexer DEMUX

10. Connectors / Accessories

Contents of Schemata / Circuit Diagram Sections in Alphabetical Order

Contents of Schemata / Circuit Diagram Sections in Numerical Order

SCHEMATA / CIRCUIT DIAGRAMS

SCHEMATA / CIRCUIT DIAGRAMS

Macha Board Synchronisation   42.125.302.01

STUDER

Macha Board Synchronisation 42.125.302.01

Macha Board Synchronisation   42.125.302.01

SECTION 2

STUDER

Macha Board Synchronisation   42.125.302.01

SECTION 2

Macha Board Synchronisation   42.125.302.01

STUDER

Macha Board Synchronisation   42.125.302.01

Macha Board Synchronisation   42.125.302.01

STUDER

Macha Board Synchronisation   42.125.302.01

Macha Board Synchronisation   42.125.302.01

Macha Board Synchronisation   42.125.302.01

Macha Board Synchronisation 42.125.302.01

MACHA

RESET

9p
D
m

TEST

ERROR

SELECT

50p
D
f

PARAM

15p
D
f

IFMES

MADISON
ABS

LOCK

SYNCHRO

SECTION 2

STUDER

Macha Board Synchronisation   42.125.302.01

REPERE	IND	COMPOSANT	DESIGNATION	QTE	FABRIQUE
A1		91216515	SCHEMA	1	
A2		91216516	FILM CI	1	
A3		3C216516	TEST DE CONFORMITE	1	
A4		91216517	FILM DE SERIGRAPHIE	1	
A5		3C216517	ECRAN OE SERIGRAPHIE	1	
A6		91216518	FILM DE VERNIS EPARGNE	1	
A7		91114197	PLAN DE FABRICATION	1	
A8		30114197	OUTIL OE FABRICATION	1	
A9		91114219	PLAN OE MONTAGE	1	
A10		91122201	MODIF OE CABLAGE	1	
A11		91114182	FACE AVANT	1	
A12		30114182	OUTILLAGE	1	
A13		91216521	MYLAR SERIGRAPHIE FACE AVANT	1	
A14		30216521	OUTILLAGE	1	
A15		91216525	PLAN DE SERIGRAPHIE FACE AVANT	1	
R1			NON CABLE	1	
R2		95619751	RESISTANCE C109 4,53KOHM	1	
R3		95619784	RESISTANCE C109 10K OHM 1/4W 1%	1	
R4	1	95612139	RESISTANCE C103 4,7K OHM 1/4W 5%	1	
R5		95619784	RESISTANCE C109 10K OHM 1/4W 1%	1	
R6		95612127	RESISTANCE C103 1,5K OHM 1/4W 5%	1	
R7		95612127	RESISTANCE C103 1,5K OHM 1/4W 5%	1	
R8	1	95612123	RESISTANCE C103 1K OHM 1/4W 5%	1	
R9	1	95612123	RESISTANCE C103 1K OHM 1/4W 5%	1	
R10		95612135	RESISTANCE C103 3,3K OHM 1/4W 5%	1	
R11		95612101	RESISTANCE C103 120 OHM 1/4W 5%	1	
R12		95612101	RESISTANCE C103 120 OHM 1/4W 5%	1	
R13		95612101	RESISTANCE C103 120 OHM 1/4W 5%	1	
R14	1	95612123	RESISTANCE C103 1K OHM 1/4W 5%	1	
R15		95612134	RESISTANCE C103 3K OHM 1/4W 5%	1	
R16		95612161	RESISTANCE C103 39K OHM 1/4W 5%	1	
R17		95619784	RESISTANCE C109 10K OHM 1/4W 1%	1	
R18	1	95612123	RESISTANCE C103 1K OHM 1/4W 5%	1	
R19		95612137	RESISTANCE C103 3,9K OHM 1/4W 5%	1	
R20		95612123	RESISTANCE C103 1K OHM 1/4W 5%	1	
R21		95612327	RESISTANCE C106 2M OHM 1/4W 5%	1	
R22		95612129	RESISTANCE C103 1,8K OHM 1/4W 5%	1	
R23		95612150	RESISTANCE C103 13K OHM 1/4W 5%	1	
R24		95612134	RESISTANCE C103 3K OHM 1/4W 5%	1	
R25		95612143	RESISTANCE C103 6,8K OHM 1/4W 5%	1	
R26		95612151	RESISTANCE C103 15K OHM 1/4W 5%	1	
R27		95612134	RESISTANCE C103 3K OHM 1/4W 5%	1	
R28		95612137	RESISTANCE C103 3,9K OHM 1/4W 5%	1	
R29	2	95612143	RESISTANCE C103 6,8K OHM 1/4W 5%	1	
R30		95612123	RESISTANCE C103 1K OHM 1/4W 5%	1	
R31		95612137	RESISTANCE C103 3,9K OHM 1/4W 5%	1	
R32		95612123	RESISTANCE C103 1K OHM 1/4W 5%	1	
R33		95612129	RESISTANCE C103 1,8K OHM 1/4W 5%	1	
R34		95619630	RESISTANCE C109 249 OHM 1/4W 1%	1	
R35		95612138	RESISTANCE C103 4,3K OHM 1/4W 5%	1	
R36	2	95619795	RESISTANCE C109 13K OHM 1/4W 1%	1	
R37	1	95612147	RESISTANCE C103 10K OHM 1/4W 5%	1	
RR1	1	95650012	RESEAU DE RESISTANCE DIP14 7x470 OHM	1	
RR2		95656005	RESEAU DE RESISTANCE SIL 9.8 15K OHM	1	
RR3		95656005	RESEAU DE RESISTANCE SIL 9.8 15K OHM	1	
RR4		95650028	RESEAU DE RESISTANCE SIL 9.8 3,3K OHM	1	
RR5		95656005	RESEAU DE RESISTANCE SIL 9.8 15K OHM	1	
RR6		95650028	RESEAU DE RESISTANCE SIL 9.8 3,3K OHM	1	
C1		95555073	CONDENSATEUR C241 100NF	1	
C2		95555073	CONDENSATEUR C241 100NF	1	
C3		95555073	CONDENSATEUR C241 100NF	1	
C4		95555073	CONDENSATEUR C241 100NF	1	
C5		95555073	CONDENSATEUR C241 100NF	1	
C6		95555073	CONDENSATEUR C241 100NF	1	
C7		95555073	CONDENSATEUR C241 100NF	1	
C8		95555073	CONDENSATEUR C241 100NF	1	
C9		95555073	CONDENSATEUR C241 100NF	1	
C10		95555073	CONDENSATEUR C241 100NF	1	
C11		95555073	CONDENSATEUR C241 100NF	1	
C12		95555073	CONDENSATEUR C241 100NF	1	
C13		95555073	CONDENSATEUR C241 100NF	1	
C14		95555073	CONDENSATEUR C241 100NF	1	
C15		95555073	CONDENSATEUR C241 100NF	1	
C16		95555073	CONDENSATEUR C241 100NF	1	
C17		95560001	CONDENSATEUR RUBYCON 47UF 10V	1	
C18		95560001	CONDENSATEUR RUBYCON 47UF 10V	1	
C19		95555073	CONDENSATEUR C241 100NF	1	
C20		95555073	CONDENSATEUR C241 100NF	1	
C21		95555073	CONDENSATEUR C241 100NF	1	

REPERE	IND	COMPOSANT	DESIGNATION	QTE	FABRIQUE
C22		95555073	CONDENSATEUR C241 100NF	1	
C23		95555073	CONDENSATEUR C241 100NF	1	
C24		95555073	CONDENSATEUR C241 100NF	1	
C25		95555073	CONDENSATEUR C241 100NF	1	
C26		95555073	CONDENSATEUR C241 100NF	1	
C27		95555073	CONDENSATEUR C241 100NF	1	
C28		95555073	CONDENSATEUR C241 100NF	1	
C29		95555073	CONDENSATEUR C241 100NF	1	
C30		95555073	CONDENSATEUR C241 100NF	1	
C31		95555073	CONDENSATEUR C241 100NF	1	
C32		95555073	CONDENSATEUR C241 100NF	1	
C33		95555073	CONDENSATEUR C241 100NF	1	
C34		95555073	CONDENSATEUR C241 100NF	1	
C35		95555073	CONDENSATEUR C241 100NF	1	
C36		95555073	CONDENSATEUR C241 100NF	1	
C37		95555073	CONDENSATEUR C241 100NF	1	
C38		95555073	CONDENSATEUR C241 100NF	1	
C39		95555073	CONDENSATEUR C241 100NF	1	
C40		95555073	CONDENSATEUR C241 100NF	1	
C41			NEANT		
C42		95555073	CONDENSATEUR C241 100NF	1	
C43		95555073	CONDENSATEUR C241 100NF	1	
C44		95555073	CONDENSATEUR C241 100NF	1	
C45		95555073	CONDENSATEUR C241 100NF	1	
C46		95555073	CONDENSATEUR C241 100NF	1	
C47		95555073	CONDENSATEUR C241 100NF	1*	
C48		95555073	CONDENSATEUR C241 100NF	1	
C49		95562420	CONDENSATEUR RUBYCON 100UF 25V	1	
C50		95555073	CONDENSATEUR C241 100NF	1	
C51		95555073	CONDENSATEUR C241 100NF	1	
C52		95555073	CONDENSATEUR C241 100NF	1	
C53		95566029	CONDENSATEUR 6,8UF 10V	1	
C54		95562412	CONDENSATEUR RUBYCON 22UF 25V	1	
C55		95555073	CONDENSATEUR C241 100NF	1	
C56		95555073	CONDENSATEUR C241 100NF	1	
C57		95555082	CONDENSATEUR CK06 820NF	1	
C58		95555073	CONDENSATEUR C241 100NF	1	
C59		95555073	CONDENSATEUR C241 100NF	1	
C60		95555073	CONDENSATEUR C241 100NF	1	
C61		95562412	CONDENSATEUR 22UF 25V	1	
C62		95555073	CONDENSATEUR C241 100NF	1	
C63		95555073	CONDENSATEUR C241 100NF	1	
C64		95555073	CONDENSATEUR C241 100NF	1	
C65		95555073	CONDENSATEUR C241 100NF	1	
C66			NON CABLE		
C67		95555012	CONDENSATEUR C241 100PF	1	
C68		95562402	CONDENSATEUR RUBYCON 1UF 50V	1	
U1		95161075	AFFICHEUR 5082-7730	1	H.P
U2		95366001	CIRCUIT INTEGRE 74LS47	1	
U3		95360196	CIRCUIT INTEGRE 74FCT191	1	
U4		95360196	CIRCUIT INTEGRE 74FCT191	1	
U5		95360196	CIRCUIT INTEGRE 74FCT191	1	
U6		95363036	CIRCUIT INTEGRE 74FCT823	1	
U7		95363036	CIRCUIT INTEGRE 74FCT823	1	
U8		95360161	CIRCUIT INTEGRE MAX 697	1	
U9		95363027	CIRCUIT INTEGRE 74HC08	1	
U10		95365000	CIRCUIT INTEGRE 74LS74	1	
U11		95360197	CIRCUIT INTEGRE 7130LA-45-P	1	
U12		95360197	CIRCUIT INTEGRE 7130LA-45-P	1	
U13		95360197	CIRCUIT INTEGRE 7130LA-45-P	1	
U14		95360197	CIRCUIT INTEGRE 7130LA-45-P	1	
U15		95360197	CIRCUIT INTEGRE 7130LA-45-P	1	
U16		95360159	CIRCUIT INTEGRE 7130LA-35-P	1	
U17		95360159	CIRCUIT INTEGRE 7130LA-35-P	1	
U18		95360159	CIRCUIT INTEGRE 7130LA-35-P	1	
U19		95360204	CIRCUIT INTEGRE MAX233	1	
U20		95390001	CIRCUIT INTEGRE PAL 16L8D-P	1	
U20	2	00010065	PROGRAMME "DSPMC"	1	
U21		95390001	CIRCUIT INTEGRE PAL 16L8D-P	1	
U21	1	00010053	PROGRAMME "MACHA2"	1	
U22		95360014	CIRCUIT INTEGRE 26C32C	1	
U23		95340017	CIRCUIT INTEGRE 26C32C	1	
U24		95340017	CIRCUIT INTEGRE 26C32C	1	
U25		95365000	CIRCUIT INTEGRE 74LS74	1	
U26		95360201	CIRCUIT INTEGRE 7164L-45-TP	1	
U27		95360207	CIRCUIT INTEGRE 7164L-45-TP	1	
U28		95360207	CIRCUIT INTEGRE 7164L-45-TP	1	
U29	2	95320000	CIRCUIT INTEGRE 27C256-15	1	
U29	1	00010057	PROGRAMME "MACHA"	1	

REPERE	IND	COMPOSANT	DESIGNATION	QTE	FABRIQUE
U30		95363036	CIRCUIT INTEGRE 74FCT823B-P	1	
U31		95363036	CIRCUIT INTEGRE 74FCT823B-P	1	
U32		95363036	CIRCUIT INTEGRE 74FCT823B-P	1	
U33		95363036	CIRCUIT INTEGRE 74FCT823B-P	1	
U34		95363036	CIRCUIT INTEGRE 74FCT823B-P	1	
U35		95360200	CIRCUIT INTEGRE 74FCT833B-P	1	
U36		95360199	CIRCUIT INTEGRE 74FCT821B-P	1	
U37		95360199	CIRCUIT INTEGRE 74FCT821B-P	1	
U38		95360214	CIRCUIT INTEGRE SN75172	1	TEXAS
U39		95340017	CIRCUIT INTEGRE 26C32C	1	
U40		95360214	CIRCUIT INTEGRE SN75172	1	TEXAS
U41	2	95360189	CIRCUIT INTEGRE 74FCT245	1	
U42		95360192	CIRCUIT INTEGRE 74FCT652	1	
U43		95360192	CIRCUIT INTEGRE 74FCT652	1	
U44		95360199	CIRCUIT INTEGRE 74FCT821B-P	1	
U45		95360199	CIRCUIT INTEGRE 74FCT821B-P	1	
U46		95360200	CIRCUIT INTEGRE 74FCT833B-P	1	
U47		95360192	CIRCUIT INTEGRE 74FCT652	1	
U48		95360192	CIRCUIT INTEGRE 74FCT652	1	
U49		95360195	CIRCUIT INTEGRE PAL20R4B	1	
U49	2	00010066	PROGRAMMA "PARMACH1"	1	
U50		95360073	CIRCUIT INTEGRE 74 FCT B33	1	
U51		95360214	CIRCUIT INTEGRE SN75172	1	TEXAS
U52		95340017	CIRCUIT INTEGRE 26C32C	1	
U53		95340017	CIRCUIT INTEGRE 26C32C	1	
U54		95360214	CIRCUIT INTEGRE SN75172	1	TEXAS
U55		95360216	CIRCUIT INTEGRE DSP56001 RC20	1	
U56		95360199	CIRCUIT INTEGRE 74FCT821B-P	1	
U57		95360201	CIRCUIT INTEGRE 74AS250-P	1	
U58		95360203	CIRCUIT INTEGRE OS1000H-60	1	
U59		95360190	CIRCUIT INTEGRE 74F00	1	
U60		95360202	CIRCUIT INTEGRE PAL16R4-7	1	
U60	1	00010042	PROGRAMME "SONWR"	1	
U61		95360192	CIRCUIT INTEGRE 74FCT652	1	
U62		95360203	CIRCUIT INTEGRE 74FCT833B-P	1	
U63		95340017	CIRCUIT INTEGRE 26C32C	1	
U64		95363023	CIRCUIT INTEGRE 74HC85	1	
U65	2	95010005	OSCILLATEUR 20,5MHz HCMOS TYPE 1129	1	NDK
U66	2	95360189	CIRCUIT INTEGRE 74FCT245	1	
U67		94540008	ROUE CODEUSE 422055	1	T.PROFIL
U68	3m	95340006	CIRCUIT INTEGRE SN75172	1	TEXAS
U69		95363023	CIRCUIT INTEGRE 74HC85	1	
U70		95360210	CIRCUIT INTEGRE GAL16V8-35Q	1	
U70	2	00010068	PROGRAMME "SEL28.2" (EN 16R4)	1	
U71		95360050	CIRCUIT INTEGRE 74HC74	1	
U72		95360192	CIRCUIT INTEGRE 74FCT652	1	
U73	2	95360189	CIRCUIT INTEGRE 74FCT245	1	
U74		95360192	CIRCUIT INTEGRE 74FCT652	1	
U75		95363029	CIRCUIT INTEGRE 74HC00	1	
U76		95360202	CIRCUIT INTEGRE PAL16R4-7	1	
U76	1	00010041	PROGRAMME "SONRD"	1	
U77		95360194	CIRCUIT INTEGRE 29C833A	1	
U78		95360192	CIRCUIT INTEGRE 74FCT652	1	
U79		95332032	CIRCUIT INTEGRE 7407	1	
U80		95332012	CIRCUIT INTEGRE LM393	1	
U81		95360179	CIRCUIT INTEGRE 74LS590	1	
U82		95360059	CIRCUIT INTEGRE 74HCT4046	1	
U83			NEANT (OPTION:C I VCXO 12,288 MHz)	1	
U84	1	95363037	CIRCUIT INTEGRE 74F244	1	
U85		95366000	CIRCUIT INTEGRE 74LS244	1	
U86		51550005	CIRCUIT INTEGRE DIGI006N	1	
U87	1	95360232	OSCILLATEUR 13,3MHz NCHO80 C	1	SARONIX
U88		95360219	CIRCUIT INTEGRE 74F86	1	
U89		95360203	CIRCUIT INTEGRE OS1000H-60	1	
U90		95332012	CIRCUIT INTEGRE LM393	1	
U91		95340014	CIRCUIT INTEGRE PAL2OL8	1	
U91	1	00010051	PROGRAMME "MASYNC"	1	
U92		95390018	CIRCUIT INTEGRE PAL 16R6Q-25	1	
U92	1	00010052	PROGRAMME "MASEQ"	1	
U93		95390008	CIRCUIT INTEGRE PAL16R4A2	1	
U93	1	00010050	PROGRAMME "FE-INT"	1	
U94		95390003	CIRCUIT INTEGRE PAL16R4-D-P	1	
U94	2	00010067	PROGRAMME "HOSTMC.1"	1	
U95		95360175	CIRCUIT INTEGRE 74F244	1	
U96		95363035	CIRCUIT INTEGRE 74LS240	1	
U97		95360059	CIRCUIT INTEGRE 74HCT4046	1	
U98		95360179	CIRCUIT INTEGRE 74LS590	1	
U99		95360179	CIRCUIT INTEGRE 74LS590	1	
U100		95300011	CIRCUIT INTEGRE TX0107W0T TCXO 14,112MHz	1	

REPERE	IND	COMPOSANT	DESIGNATION	QTE	FABRIQUE
J1			NEANT		
J2		94410049	DIN41612.8609.396-71-13-755000-E1	1	SOURIAU
J3		94410049	DIN41612.8609.396-71-13-755000-E1	1	SOURIAU
J4		94410020	XLB-3-31-PCV	1	ITT
X2		97659810	VIS TAP-TIP M2,5	2	
P1		94480021	CONNECTEUR REF: ZE0E 111979-011	1	ITT
P2		94420160	CONNECTEUR OO50S864	1	SOURIAU
X3		94420161	VERROUILLAGE (1 PAIRE)609-008-50	1	ANSLEY
X1		94420167	CONNECTEUR 622-50PM1	1	ANSLEY
X6		94420165	VERROUILLAGE A GLISSIERE 609-50LS	1	ANSLEY
P3		94480022	CONNECTEUR REF: ZEDA 111978-111	1	ITT
X4		94480023	VERROUILLAGE REF: 8630-01-060	4	SOURIAU
TP1		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP2		94340603	PLOT LOUPOT E184/5	1	
TP3		94340603	PLOT LOUPOT E184/5	1	
TP4		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP5		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP6		94340603	PLOT LOUPOT E184/5	1	
TP7		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP8		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP9		94340603	PLOT LOUPOT E184/5	1	
TP10		94340603	PLOT LOUPOT E184/5	1	
TP11		94340603	PLOT LOUPOT E184/5	1	
TP12		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP13		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP14		94340603	PLOT LOUPOT E184/5	1	
TP15		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP16		94340603	PLOT LOUPOT E184/5	1	
TP17		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP18		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP19		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP20		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP21		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP22		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP23		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP24		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
TP25		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.03	COMATEL
L1		94450004	SELF 4-PASS 830 10mm GT4 1x2x10	1	FERRINOX
K1	2	94643013	RELAIS 031A3100	1	CELDUC
L2		94450004	SELF 4-PASS 830 10mm GT4 1x2x10	1	FERRINOX
CR1		95163000	OIODE ELECTRO HLMP 1700 ROUGE	1	H.P
CR2		95163002	OIODE ELECTRO HLMP 1790 VERT	1	H.P
CR3		95222854	DIODE 1N4448	1	
CR4		95163000	OIODE ELECTRE HLMP 1700 ROUGE	1	H.P
CR5		95163002	OIODE ELECTRO HLMP 1790 VERT	1	H.P
E1		94563003	BOUTON POUSSOIR 9233WWCD	1	APR
X5		94320003	CAVALIER 313-1731-0-00-406	3	COMATEL
X7		94480300	SUPPORT POUR C.I 6PTS	1	
X8		94480301	SUPPORT POUR C.I 8PTS	4	
X9		94480302	SUPPORT POUR C.I 14PTS	24	
X10		94480304	SUPPORT POUR C.I COUDE 14PTS A14-LE0-H	1	ANTELEC
X11		94480303	SUPPORT POUR C.I 16PTS	24	
X12		94480305	SUPPORT POUR C.I 20PTS ETROIT	16	
X13		94480313	SUPPORT POUR C.I 20PTS LARGE	30	
X14		94480316	SUPPORT POUR C.I 28PTS ETROIT	3	
X15		94480308	SUPPORT POUR C.I 28PTS LARGE	2	
X16		94480311	SUPPORT POUR C.I 48PTS	8	
X17		94480019	SUPPORT POUR C.I PGA88 PGA-088-CH3-S-TG	1	
X18		94320034	REPARTITEUR COM-0IP 341-0799-1-20-40-0	2	COMATEL
S11		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.15	COMATEL
X19		94316870	RAIOISSEUR 316870	1	
X20		97880003	ENTRETOISE EXALIS4 LONG.5mm	6	ACCEL
X21		97880004	ENTRETOISE ENLIS2 LONG.6mm	2	ACCEL
X22	1	91815597	VIS M2,5x14mm	6	
X23		98230043	POIGNEE EXTRACTEUR HAUTE 131177	0.5	SEEM
X24		98230044	POIGNEE EXTRACTEUR BASSE 131178	0.5	SEEM
X25	1	97613203	VIS V106 F/90 M2,5x6	2	
X26	1	97612202	VIS V126 M2,5x5	2	
X27	1	97612205	VIS V126 M2,5x8	2	
X28	2	97715007	RONDELLE V151 MU 2,5	2	
X29		91815561	MYLAR ETIQ. POIGNEE REP.0	1	
X30		30815561	OUTILLAGE	1	
X31		91815595	PLAN DE SERIG. ETIQ. POIGNEE	1	
X32		98230045	OEILLET + VIS 492959	0.02	SEEM
X33		91815505	ETIQUETTE DE REPERAGE	1	
X34		94330007	SUPPORT AST OO35-9660	4	SHURTER
E2		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.05	COMATEL
E3		94450009	REPARTITEUR MINI W 385-0358-1-40-400	0.05	COMATEL
X35		94450009	REPARTITEUR COM-DIP 341-0799-1-21-40-0	1.91	COMATEL

SCHEMATA / CIRCUIT DIAGRAMS

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

DSP DE GESTION

PROGRAM ROM
(MIPROM)

27C256

MIDECOD1
U1
PAL22V10P

MIDECOD2
U8
PAL22V10P

HOSTMADI
U42
PAL22V10P

HOSTMADI
U21
PAL22V10P

8k   32k

DATA RAM

DSP DE GESTION

DSP56001-FC33

U10
MAX233

TRANSMIT
RECEIVE
VISUPRES

HOST_PAR[0:7]

H_A[0:2]

DSPG_IRQA
DSPG_IRQB

CLK_DSPG

RESETG

16MHZ5

DESIGNATION	ENSEMBLE / ASSEMBLY	N°E / COMPONENTS LIST 88 527833
DSP DE GESTION	CARTE MADISONI	FOLIO / SHEET . 1/16
	STUDER	91224107

SECTION 3

STUDER

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

GENIO1

GENIO2

ACTIVE WDOG

CHIEN
DE GARDE

GENI1

GENI2

SELECT

ERREUR

MADI 1

MADI 2

FACE AVANT

DESIGNATION	ENSEMBLE / ASSEMBL.	HPE / COMPONENTS LIST 55 527622
Registres GENIO/GENI	CARTE MADISONI	FOLIO / SHEET 2/16

STUDER   91224107

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

DETECTION OVLD MADI 1 IN XILOVL 1

MADI1_DP[00:23]

CLK1_TAXI
FIFO1_WR

BASC1_DPINR
RAZ1
GD1_DPR
PARITEMADIN1
FE1
INF1_DP1
INF1_DP4
INF1_DP7

U88

+5V

R19 1K

D2

ROUGE — OVLD1

RST_LOG1
LINK XI1

AU_CAS2

TP25
TPXOVL1

INIT2

D1_DSPT[00:23]

RR21A
RR21B
RR21C

D/F

XIL2_3
OVLD1_CE
LINK1_2
LINK1_1

TP11

SW17

TP18

FM

RSTT1

XIL1_2
PROG_CLK
MADI1_DP19

XC3042-PQ100-100

A1_DSPT[00:15]

DETECTION OVLD MADI 2 IN XILOVL 2

MADI2_DP[00:23]

CLK2_TAXI
FIFO2_WR

BASC2_DPINR
GO2_DPR
PARITEMADIN2
FE2
INF2_DP1
INF2_DP4
INF2_DP7

U55

+5V

R27 1K

D7

ROUGE — OVLD2

RST_LOG2
LINK XI2

AU_CAS2

TP26
TPXOVL2

INIT2

D2_OSPT[00:23]

RR20A
RR20B
RR20C

D/F

XIL3_4
OVLD2_CE
LINK2_2
LINK2_1

TP12

TP17

FM

RSTT2

XIL3_4
PROG_CLK
MADI2_DP19

XC3042-PQ100-100

A2_DSPT[00:15]

SYSTEME 1 DE SURVEILLANCE DE CANAL

SEL1_CAN
DDSPG[00:23]

U33
U52
U47
U47

START1_INFO

PARITEMADIN1
SEL1_INFO

SURV51

74FCT574

74FCT574

A1_DPR[0:5]

P=Q

74FCT521

MADI1_INFO

INF1_DP[0:6]

SYSTEME 2 DE SURVEILLANCE DE CANAL

SEL2_CAN

U20
U56
U54

PARITEMADIN2
SEL2_INFO

SURV52

74FCT574

74FCT574

A2_DPR[0:5]

P=Q

74FCT521

START2_INFO

MADI2_INFO

INF2_DP[0:6]

SECTION 3

STUDER

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

DESIGNATION	ENSEMBLE / ASSEMBLY	NPC / COMPONENTS LIST BB 527823
DSP DE TRAITEMENT 012	CARTE MADISONI	FOLIO / SHEET 4/16
STUDER		91224107

STUDER

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

DSP 6
U57

DSP 5
U60

DSP 4
U65

CTRL BUS 2
U75

PAL22V10P

DESIGNATION	ENSEMBLE / ASSEMBLY	NPE / COMPONENTS LIST 88 527833
DSP DE TRAITEMENT 456	CARTE MADISONI	FOLIO / SHEET 5/16

STUDER   91224107

SECTION 3

STUDER

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

INTERFACE BUS DEBUG

GESTION D' INTERFACE BUS PARAMETRE

DESIGNATION INTERFACE BUS DEBUG ET INTERFACE BUS PARAMETRE	ENSEMBLE / ASSEMBLY CARTE MADISON	NPC / COMPONENTS LIST BB 527835
		FOLIO / SHEET 6/16

STUDER   91224107

STUDER

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

DESIGNATION	ENSEMBLE / ASSEMBLY	NRC / COMPONENTS LIST SE.527033
ENTREE TAXI 1	CARTE MADISONI	FOLIO / SHEET 7/16

STUDER   91224107

SECTION 3

STUDER

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

DESIGNATION	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST : 88 527833
ENTREE TAXI 2	CARTE MADISONI	FOLIO SHEET 8/16

STUDER   91224107

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

RETARD BITS INFO 1

GENERATEUR DE PARTIE

DESIGNATION	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST EB 92787T
MADI 1 DPRAM & FIFO	CAPTE MADISONI	FOLIO / SHEET 5/16
STUDER		91224107

SECTION 3

STUDER

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

RETARD BITS INFO 2

GENERATEUR DE PARTIE

DESIGNATION	ENSEMBLE / ASSEMBLY	NPE / COMPONENTS LIST 48 557833
MADI 2 DPRAM & FIFO	CARTE MADISONII	FOLIO / SHEET 10/16

STUDER   91224107

Optical Madisoni 2 Madi Input Board 42.125.303.01
Coax Madisoni 2 Madi Input Board 42.125.303.11

ROUE CODEUSE

BUS SON

SECTION 3

STUDER

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

DPRAM MADI 1		DPRAM INFO 1	

DPRAM MADI 1   DPRAM INFO 1

DPRAM MADI 2   DPRAM INFO 2

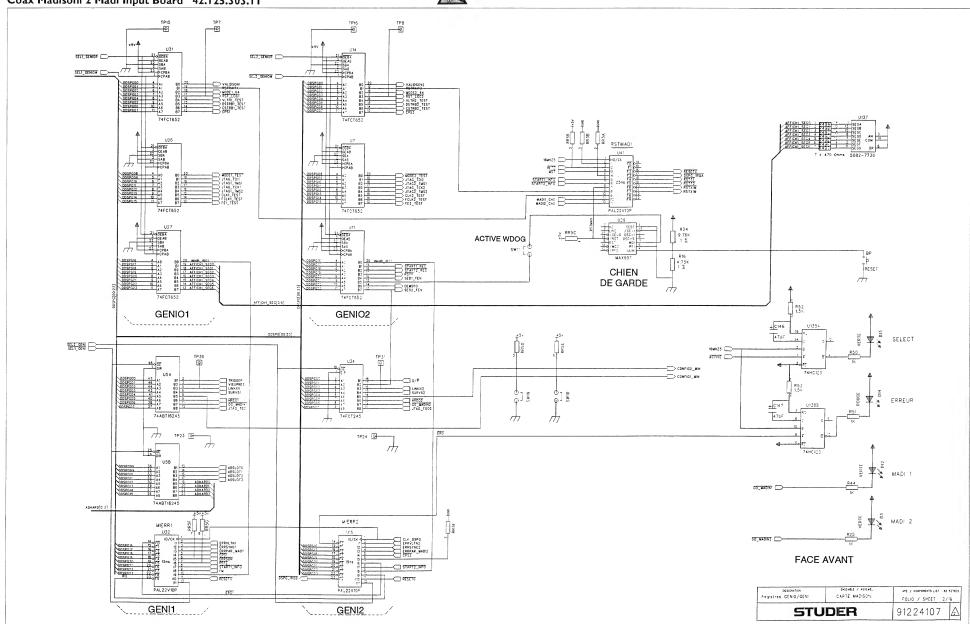| DESIGNATION	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST AB 527832
DPRAM BUS SON	CARTE MADISONI	FOLIO / SHEET 12/16

STUDER   91224107

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

XILGEN 1

XILGEN 2

CONTROLE D'ACQUISITION DE MADI IN 1 & 2

ENSEMBLE / ASSEMBLY
CARTE MADISONI

NRE / COMPONENTS LIST 88 527833

FOLIO / SHEET 13/16

STUDER   91224107

STUDER

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

NB: La terminaison de la ligne (en fin de piste)
est accordee en impedance.
L'adaptation est faite soit par l'ensemble 220R/330R
soit par l'ensemble 56R/33pF.

DESIGNATION	ENSEMBLE / ASSEMBLY CARTE MADISONI	NRE / COMPONENTS LIST 88 527833 FOLIO / SHEET : 14/16

STUDER   91224107

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

CONNECTEUR SUPERIEUR			CONNECTEUR MILIEU			CONNECTEUR INFERIEUR		
RANGEE A	RANGEE B	RANGEE C	RANGEE A	RANGEE B	RANGEE C	RANGEE A	RANGEE B	RANGEE C
J5-A1	J5-B1 MGND	J5-C1	J2-A1 ADR0	J2-B1 ADR1	J2-C1 ADR2	J4-A1	J4-B1	J4-C1 BHOST0
J5-A2	J5-B2	J5-C2	J2-A2 ADR3	J2-B2 ADR4	J2-C2 ADR5	J4-A2	J4-B2	J4-C2 BHOST1
J5-A3	J5-B3	J5-C3	J2-A3 ADR6	J2-B3 ADW5	J2-C3 ADW6	J4-A3	J4-B3	J4-C3 BHOST2
J5-A4	J5-B4	J5-C4	J2-A4 ADW0	J2-B4	J2-C4 TRSF	J4-A4	J4-B4	J4-C4 BHOST3
J5-A5	J5-B5	J5-C5	J2-A5 ADW1	J2-B5	J2-C5 SEW00	J4-A5	J4-B5	J4-C5 BHOST4
J5-A6	J5-B6 GND	J5-C6	J2-A6 ADW2	J2-B6	J2-C6 SEW01	J4-A6	J4-B6	J4-C6 BHOST5
J5-A7	J5-B7 +5V	J5-C7	J2-A7 ADW3	J2-B7	J2-C7 SEW02	J4-A7	J4-B7	J4-C7 BHOST6
J5-A8	J5-B8 ADSLOT3	J5-C8	J2-A8 ADW4	J2-B8	J2-C8 SEW03	J4-A8	J4-B8	J4-C8 BHOST7
J5-A9	J5-B9 ADSLOT2	J5-C9	J2-A9 GND	J2-B9	J2-C9 GND	J4-A9 GND	J4-B9	J4-C9 GND
J5-A10	J5-B10 ADSLOT1	J5-C10	J2-A10	J2-B10	J2-C10 SD00	J4-A10 BFE	J4-B10	J4-C10
J5-A11	J5-B11 ADSLOT0	J5-C11	J2-A11 GND	J2-B11	J2-C11 SD01	J4-A11 GND	J4-B11	J4-C11 HOSTPAR
J5-A12A	J5-B12 GND	J5-C12	J2-A12A SEW12	J2-B12 SEW04	J2-C12 SD02	J4-A12A BHT2	J4-B12	J4-C12 HOSTADD
J5-A13	J5-B13	J5-C13	J2-A13 SEW13	J2-B13 SEW05	J2-C13 SD03	J4-A13	J4-B13	J4-C13 HOSTAD1
J5-A14	J5-B14	J5-C14	J2-A14 SEW14	J2-B14 SEW06	J2-C14 SD04	J4-A14 BHT1	J4-B14	J4-C14 HOSTAD2
J5-A15	J5-B15 GND	J5-C15	J2-A15 GND	J2-B15 SEW07	J2-C15 SD05	J4-A15 GND	J4-B15	J4-C15 HOSTR
J5-A16	J5-B16	J5-C16	J2-A16 SEW15	J2-B16 SEW08	J2-C16 SD06	J4-A16 BHMT	J4-B16	J4-C16 HOSTACK
J5-A17	J5-B17	J5-C17	J2-A17 GND	J2-B17 SEW09	J2-C17 SD07	J4-A17 GND	J4-B17	J4-C17 HOSTEN
J5-A18	J5-B18	J5-C18	J2-A18 SER0	J2-B18 SEW10	J2-C18 SD08	J4-A18	J4-B18	J4-C18 HOSTSEL
J5-A19	J5-B19	J5-C19	J2-A19 GND	J2-B19 SEW11	J2-C19 SD09	J4-A19 GND	J4-B19	J4-C19 HOSTRED
J5-A20	J5-B20	J5-C20	J2-A20 SER1	J2-B20 GND	J2-C20 SD10	J4-A20 BFM	J4-B20 GND	J4-C20
J5-A21	J5-B21	J5-C21	J2-A21	J2-B21 SER2	J2-C21 SD11	J4-A21	J4-B21	J4-C21 HPS0
J5-A22	J5-B22	J5-C22	J2-A22	J2-B22 SER3	J2-C22 SD12	J4-A22	J4-B22	J4-C22 SPS
J5-A23	J5-B23	J5-C23	J2-A23 SD28	J2-B23 GND	J2-C23 SD13	J4-A23	J4-B23 GND	J4-C23
J5-A24	J5-B24	J5-C24	J2-A24 SD29	J2-B24 SD21	J2-C24 SD14	J4-A24 BFCLK	J4-B24	J4-C24 BTRIGGER
J5-A25	J5-B25	J5-C25	J2-A25 SD30	J2-B25 SD22	J2-C25 SD15	J4-A25	J4-B25	J4-C25
J5-A26	J5-B26	J5-C26	J2-A26 SD31	J2-B26 SD23	J2-C26 SD16	J4-A26 BRESET	J4-B26	J4-C26 ADSR03
J5-A27	J5-B27	J5-C27	J2-A27 DP0	J2-B27 SD24	J2-C27 SD17	J4-A27	J4-B27	J4-C27 ADSR02
J5-A28	J5-B28	J5-C28	J2-A28 DP1	J2-B28 SD25	J2-C28 SD18	J4-A28	J4-B28	J4-C28 ADSR01
J5-A29	J5-B29	J5-C29	J2-A29 DP2	J2-B29 SD26	J2-C29 SD19	J4-A29	J4-B29	J4-C29 ADSR00
J5-A30	J5-B30	J5-C30	J2-A30 DP3	J2-B30 SD27	J2-C30 SD20	J4-A30	J4-B30	J4-C30
J5-A31	J5-B31	J5-C31	J2-A31	J2-B31	J2-C31	J4-A31 MGND	J4-B31	J4-C31 MGND
J5-A32	J5-B32 MGND	J5-C32	J2-A32 +5V	J2-B32 +5V	J2-C32 +5V	J4-A32 +5V	J4-B32 +5V	J4-C32 +5V

CONNECTEUR DEBUG

J6-1	VISUPRES
J6-2	RECEIVE
J6-3	TRANSMIT
J6-4	
J6-5	GND
J6-6	
J6-7	
J6-8	
J6-9	

CONNECTEUR PROG XILINX

J3-1	+5V
J3-2	
J3-3	
J3-4	PROG_CLK
J3-5	D/F
J3-6	DIN

DESIGNATION CONNECTEURS	ENSEMBLE / ASSEMBLY CARTE MADISONI	ARE COMPONENTS LIST - 88 527833 FOLIO / SHEET 15/16
STUDER		91224107

STUDER

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

CARTE MADISONI

+5V

CONDENSATEURS DECOUPLAGE
COUCHES D' ALIMENTATIONS

+C26	+C89	+C90	+C111	+C114	+C204	+C205	+C206	+C207	+C304	+C305	+C306
47UF	47UF	47UF	47UF	47UF	47UF	47UF	47UF	47UF	47UF	47UF	47UF

C154 C155 C156 C157 C158 C159 C160 C161 C162 C163 C164 C165 C166 C167 C168 C169 C170 C171 C172 C173 C174 C175 C176 C177 C178 C179 C180 C181 C182 C183 C184 C185 C186 C187 C188 C189 C190 C191 C192 C193 C194 C195 C196 C197 C198 C199 C200 C201 C202 C203

50 X 10 nF

CONDENSATEURS
DECOUPLAGE
BOITIERS

C1 C2 C3 C4 C5 C6 C7 C9 C23 C30 C44 C55 C64 C71 C82 C91 C97 C107 C45 C31 C24 C10 C83 C72 C65 C56 C92 C98 C19 C19 C20 C15 C32 C33 C34 C35 C46 C50 C51 C47 C58 C59 C60 C68 C69 C81 C93 C99 C94 C84

50 X 10 nF

C37 C39 C12 C21 C13 C8 C22 C27 C25 C41 C42 C43 C234 C235 C236 C237 C238 C239 C240 C241 C233

21 x 10nt

STUDER

91224107

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

SECTION 3

STUDER

Optical Madisoni 2 Madi Input Board 42.125.303.01
Coax Madisoni 2 Madi Input Board 42.125.303.11

MODIF.: IND. Xa=ajout - IND. Xm=modif. ref. et/ou valeur - IND. Xs=suppression

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
A1		91224107	SCHEMA		1		
A2		91224108	FILM CIRCUIT		1		
A3		30224108	TEST DE CONFORMITE		1		
A4		91224109	FILM DE SERIGRAPHIE		1		
A5		91224110	FILM EPARGNE SOUDURE		1		
A6		91224126	FILM PATE A BRASER		1		
A7		30224126	ECRAN PATE A BRASER		1		
A8		91122550	PLAN DE FABRICATION		1		
A9		30122550	OUTIL DE FABRICATION		1		
A10		91122552	USINAGE FACE AVANT		1		
A11		91224111	FILM SERIGRAPHIE FACE AVANT		1		
A12		91224112	PLAN DE SERIGRAPHIE FACE AVANT		1		
A13		30224112	OUTIL DE SERIGRAPHIE FACE AVANT		1		
A14	1m	91815561	MYLAR ETIQUETTE POIGNEE REPERE D9		1		
A15		91830750	PLAN DE SERIGRAPHIE ETIQ. POIGNEE		1		
A16		30830750	OUTIL DE SERIGRAPHIE POIGNEE		1		
A17		91815505	ETIDUETTE REPERE CONNECTEUR		1		
A18		91316870	RAIDISSEUR		1		
A19		91122551	PLAN D'EDUIPEMENT		1		
A20	1a	91830799	BLINDAGE		2		
A21	1a	91830800	PATTE DE FIXATION		1		
A22	1a	91815597	VIS M2,5x14		6		
A23	5a	91830803	PLAN DE CONFIGURATION CARTE		1		
D1		95222854	DIODE	1N4448	1		
D2	1a	95110015	LED DIA:1,8 ROUGE	LTL709R (223945)	1	ORBITEC	
D3		95163002	LED VERT	HLMP-1790	1		
D4		95222854	DIODE	1N4448	1		
D5		95222854	DIODE	1N4448	1		
D6		95222854	DIODE	1N4448	1		
D7	1a	95110015	LED DIA:1,8 ROUGE	LTL709R (223945)	1	ORBITEC	
D8		95222854	DIODE	1N4448	1		
D9		95222854	DIODE	1N4448	1		
D10		95222854	DIODE	1N4448	1		
D11		95222854	DIODE	1N4448	1		
D12		95163002	LED VERT	HLMP-1790	1		
D13		95163002	LED VERT	HLMP-1790	1		
D14		95163000	LED ROUGE	HLMP-1700	1		
D15	1a	95110015	LED DIA:1,8 ROUGE	LTL709R (223945)	1	ORBITEC	
J2		94410049	CONNECT DIN 96Pts F	COUDE MALE	1	SOURIAU	
J3	1s	94450009	REPART MINI WRAP	385-0358-1-40-40-0	1		
J4		94410049	CONNECT DIN 96Pts F	COUDE MALE	1	SOURIAU	
J5		94410049	CONNECT DIN 96Pts F	COUDE MALE	1	SOURIAU	
J6		94480021	CONNECT SUBD 9Pts M	ZEDE 111979-011	1	ITT	
L1		95400006	SELF	10µH 10%	1	STI	
L2		95400006	SELF	10µH 10%	1	STI	
L3		95400006	SELF	10µH 10%	1	STI	
L4		95400006	SELF	10µH 10%	1	STI	
L5		95400007	SELF	10µH 1A	1	STI	
L6		95400006	SELF	10µH 10%	1	STI	
L7		95400006	SELF	10µH 10%	1	STI	
L8		95400006	SELF	10µH 10%	1	STI	
L9		95400006	SELF	10µH 10%	1	STI	
L10		95400006	SELF	10µH 10%	1	STI	
L11		95400006	SELF	10µH 10%	1	STI	
L12		95400007	SELF	10µH 1A	1	STI	
L13		95400006	SELF	10µH 10%	1	STI	
L14		95400006	SELF	10µH 10%	1	STI	
L15	1m	95450003	SELF REF:2129	22µH	1		
L16	1m	95450003	SELF REF:2129	22µH	1		
OSC2		95010011	OSC CMOS +/- 100PPM	NCH080C-33MH3	1	SARONIX	
RR1		95650025	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		1206
RR2		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		1206
RR3		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		1206
RR5		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		1206
RR6		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		1206
RR7		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		1206
RR8		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		1206
RR9		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		1206
RR10		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		1206
RR11		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		1206
RR12		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		1206
RR14		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		1206
RR15		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		1206
RR16		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		1206
RR17		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		1206
RR18		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		1206
RR19		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		1206
RR21		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		1206
RR22		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		1206
R49		95650012	RESEAU DE RESISTANCE	DIP 14 470 OHMS	1		
ST2		94450009	REPART MINI WRAP	385-0358-1-40-40-0	1	COMATEL	
STD1		95010012	QUARTZ HC18/U	12.5MHz 89-01-1013	1	STI	
STD2		95010012	QUARTZ HC18/U	12.5MHz 89-01-1013	1	STI	
SW1		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.05	COMATEL	
SW2		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.075	COMATEL	
SW3	1s	94450009	REPART MINI WRAP	385-0358-1-40-40-0	0	COMATEL	

MODIF.: IND. Xa=ajout - IND. Xm=modif. ref. et/ou valeur - IND. Xs=suppression

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
SW4	1s	94450009	REPART MINI WRAP	385-0358-1-40-40-0	0	COMATEL	
SW5	1s	94450009	REPART MINI WRAP	385-0358-1-40-40-0	0	COMATEL	
SW6		94563003	POUSSOIR	9233WWCD	1	APR	
SW7		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.05	COMATEL	
SW8		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.05	COMATEL	
SW9		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.05	COMATEL	
SW10		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.05	COMATEL	
SW11		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.05	COMATEL	
SW19		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.05	COMATEL	
T1	5m	95400005	TRANSFO HF	76602/5	1	NEWPORT	NEWPORT
T2	5m	95400005	TRANSFO HF	76602/5	1	NEWPORT	NEWPORT
T3	5m	95400005	TRANSFO HF	76602/5	1	NEWPORT	NEWPORT
T4	5m	95400005	TRANSFO HF	76602/5	1	NEWPORT	NEWPORT
TP1		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP2		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP3		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP4		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP5		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP6		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP7		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP8		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP9		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP10		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP11		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP12		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP13		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP14		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP15		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP16		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP17		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP18		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP19		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP20		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP21		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP22		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP23		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP24		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP25	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP26	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP27	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP28	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP29	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP30	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP31	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
U1		95300092	CIRCUIT INTEGRE	PAL22V10H-10PC	1	ADVANCED	DIP24 Et
U1	3a	00010136	PROGRAMME	"MIDECOD1"	1		
U3		95320000	CIRCUIT INTEGRE	27C256	1		DIP28
U3	3a	00010146	PROGRAMME	"MIPROM"	1		
U4		95300082	CIRCUIT INTEGRE	DSP56001-FC33	1		PQFP132
U6	6m	95300090	CIRCUIT INTEGRE	71256-L35Y	1	IDT	SSOP28
U8		95300092	CIRCUIT INTEGRE	PAL22V10H-10PC	1	ADVANCED	DIP24 Et
U8	3a	00010125	PROGRAMME	"MIDECOD2"	1		
U10		95360204	CIRCUIT INTEGRE	MAX233	1	MAXIM	DIP20
U12	4m	95300090	CIRCUIT INTEGRE	7200LA25J	1	IDT	PLCC32
U15		95300093	CIRCUIT INTEGRE	PAL22V10H-15PC	1	ADVANCED	DIP24 Et
U15	3a	00010129	PROGRAMME	"MIERR2"	1		
U16	2m	95300181	CIRCUIT INTEGRE	74FCT244ASO	1	IOT	SO20L
U17		95300096	CIRCUIT INTEGRE	XC1765-PD8C	1	XILINX	DIP8
U17	3a	00010134	PROGRAMME	"MIPRXIL2"	1		
U18	1s	95300096	CIRCUIT INTEGRE	XC1765-PD8C	1	XILINX	DIP8
U18	3a	00010135	PROGRAMME	"MIPRXIL3"	0		
U19	5m		NEANT				
U20	2m	95300178	CIRCUIT INTEGRE	74FCT574ASO	1	IDT	SO20L
U21		95300093	CIRCUIT INTEGRE	PAL22V10H-15PC	1	ADVANCED	DIP24 Et
U21	3a	00010126	PROGRAMME	"HOSTMAD1"	1		
U22	1m	95300097	CIRCUIT INTEGRE	XC3042-125PQ100C	1	XILINX	PQFP100
U23		95360202	CIRCUIT INTEGRE	PAL22V100-25PC	1	ADVANCED	DIP24 Et
U23	3a	00010131	PROGRAMME	"SROMAD"	1		
U24		95300093	CIRCUIT INTEGRE	PAL22V10H-15PC	1	ADVANCED	DIP24 Et
U24	3a	00010132	PROGRAMME	"PARMAD"	1		
U25		95300096	CIRCUIT INTEGRE	XC1765-PD8C	1	XILINX	DIP8
U25	3a	00010133	PROGRAMME	"MIPRXIL1"	1		
U28		95300095	CIRCUIT INTEGRE	MAX660CPA	1	MAXIM	DIP8
U29		95360161	CIRCUIT INTEGRE	MAX697	1	MAXIM	DIP16
U32		95300093	CIRCUIT INTEGRE	PAL22V10H-15PC	1	ADVANCED	DIP24 Et
U32	3a	00010128	PROGRAMME	"MIERR1"	1		
U33		95300178	CIRCUIT INTEGRE	74FCT574ASO	1	IDT	SO20L
U39	2m	95300180	CIRCUIT INTEGRE	74F00SC	1	NATIONAL	SO14
U41		95360202	CIRCUIT INTEGRE	PAL22V100-25PC	1	ADVANCED	DIP24 Et
U41	3a	00010127	PROGRAMME	"RSTMAD1"	1		
U42		95300093	CIRCUIT INTEGRE	PAL22V10H-15PC	1	ADVANCED	DIP24 Et
U42	3a	00010126	PROGRAMME	"RSTMAD1"	1		
U43	4m	95300091	CIRCUIT INTEGRE	7200-LA25J	1	IDT	PLCC32
U44	4m	95300091	CIRCUIT INTEGRE	7200-LA25J	1	IDT	PLCC32
U45	4m	95300091	CIRCUIT INTEGRE	7200-LA25J	1	IDT	PLCC32
U46	4m	95300091	CIRCUIT INTEGRE	7200-LA25J	1	IDT	PLCC32
U47	2m	95300178	CIRCUIT INTEGRE	74FCT574ASO	1	TEXAS	PLCC32

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
U48	2m	95300175	CIRCUIT INTEGRE	74F74SC	1	TEXAS	SO14
U49	1a	95360114	CIRCUIT INTEGRE	74F08	1		DIP14
U50		95300082	CIRCUIT INTEGRE	DSP56001-FC33	1	MOTOROLA	PQFP132
U51		95300082	CIRCUIT INTEGRE	DSP56001-FC33	1	MOTOROLA	PQFP132
U52	2m	95300177	CIRCUIT INTEGRE	74FCT521ASO	1	IOT	SO20L
U54	2m	95300178	CIRCUIT INTEGRE	74FCT574ASO	1	TEXAS	SO20L
U55	1m	95300085	CIRCUIT INTEGRE	XC3042-100PQ100C	1	XILINX	PQFP10D
U56	2m	95300177	CIRCUIT INTEGRE	74FCT521ASO	1	IDT	SO20L
U57		95300082	CIRCUIT INTEGRE	DSP56001-FC33	1	MOTOROLA	PQFP132
U59		95300093	CIRCUIT INTEGRE	PAL22V10H-15PC	1	ADVANCED	DIP24 Et
U59	3a	00010130	PROGRAMME	"CTRLBUS2"	1		
U60		95300203	CIRCUIT INTEGRE	DSP56001-FC33	1	MOTOROLA	PQFP132
U61	6m	95300090	CIRCUIT INTEGRE	71256-L35Y	1	IOT	SSOP28
U62	6m	95300090	CIRCUIT INTEGRE	71256-L35Y	1	IDT	SSOP28
U63	2m	95300179	CIRCUIT INTEGRE	74FCT8338SO	1	IDT	SO24L
U65		95300082	CIRCUIT INTEGRE	DSP56001-FC33	1	MOTOROLA	PQFP132
U67	2m	95300179	CIRCUIT INTEGRE	74FCT8338SO	1	IOT	SO24L
U68		95360202	CIRCUIT INTEGRE	PAL16R4-7	1		DIP20
U68	3a	00010D41	PROGRAMME	"SONRD"	1		
U70		95360202	CIRCUIT INTEGRE	PAL16R4-7	1		DIP20
U70	3a	00010042	PROGRAMME	"SONWR"	1		
U72		95360203	CIRCUIT INTEGRE	DS1000M-60	1		DIP8
U74	1m	95300097	CIRCUIT INTEGRE	XC3042-125PQ100C	1	XILINX	PQFP100
U75		95300093	CIRCUIT INTEGRE	PAL22V10H-15PC	1	ADVANCED	DIP24 Et
U75	3a	00010130	PROGRAMME	"CTRLBUS2"	1		
U79		95360201	CIRCUIT INTEGRE	74AS250	1		DIP24 Et
U80	2m	95300179	CIRCUIT INTEGRE	74FCT8338SO	1	IDT	SO24L
U81	2m	95300179	CIRCUIT INTEGRE	74FCT8338SO	1	IDT	SO24L
U82	2m	95300179	CIRCUIT INTEGRE	74FCT8338SO	1	IDT	SO24L
U84		95300098	CIRCUIT INTEGRE	MAX9685CPE	1	MAXIM	DIP16
U85		95300106	CIRCUIT INTEGRE	PC 74HC85T	1	PHILIPS	SO16
U88	1m	95300085	CIRCUIT INTEGRE	XC3042-100PQ100C	1	XILINX	PQFP100
U89		95300098	CIRCUIT INTEGRE	MAX9685CPE	1	MAXIM	DIP16
U90		95300098	CIRCUIT INTEGRE	MAX9685CPE	1	MAXIM	DIP16
U91	2m	95300084	CIRCUIT INTEGRE	AM7969-125PC	1	AMD	DIP28
U94	2m	95300098	CIRCUIT INTEGRE	MAX9685 CPE	1	MAXIM	DIP16
U97		95300106	CIRCUIT INTEGRE	SN 74HC85T	1	PHILIPS	SO16
U100	4m	95300091	CIRCUIT INTEGRE	7200-LA25J	1	IDT	PLCC32
U101	4m	95300091	CIRCUIT INTEGRE	7200-LA25J	1	IDT	PLCC32
U102		94420255	BNC COUDE 75 OHMS	54-21-2031	1	STUDER	
U103		94420255	BNC COUDE 75 OHMS	54-21-2031	1	STUDER	
U104		95300082	CIRCUIT INTEGRE	DSP56001-FC33	1	MOTOROLA	PQFP132
U106		95300084	CIRCUIT INTEGRE	AM7969-125PC	1	AMD	DIP28
U107	4m	95300091	CIRCUIT INTEGRE	7200-LA25J	1	IDT	PLCC32
U108		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IDT	PLCC52
U109		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IDT	PLCC52
U110	4m	95300091	CIRCUIT INTEGRE	7200-LA25J	1	IDT	PLCC32
U111		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IDT	PLCC52
U112		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IDT	PLCC52
U113	4m	95300091	CIRCUIT INTEGRE	7200-LA25J	1	IDT	PLCC32
U126		94420255	BNC COUDE 75 OHMS	54-21-2031	1	STUDER	
U128	5m						
U129		94420255	BNC COUDE 75 OHMS	54-21-2031	1	STUDER	
U132		95300095	CIRCUIT INTEGRE	MAX660CPA	1	MAXIM	DIP8
U133		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IDT	PLCC52
U134		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IDT	PLCC52
U135		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IDT	PLCC52
U136		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IDT	PLCC52
U137		95161075	CIRCUIT INTEGRE	5082-7730	1	HP	DIP14
U138	2m	95300108	CIRCUIT INTEGRE	PC 74HC123T	1	PHILIPS	SO16
U140		95366000	CIRCUIT INTEGRE	74LS244	1		DIP20
USR1		94540008	ROUE CODEUSE	422055	1	HOPT-SHU	
X1		98230043	POIGNEE EXTRACTEUR	HAUTE REF: 131177	0.1	SEEM	
X2		98230044	POIGNEE EXTRACTEUR	BASSE REF: 131178	0.1	SEEM	
X3	2m	97613203	VIS	V106	F/90 M2,5x6	10	
X4		97612202	VIS	V126	M2,5X5	2	
X5	2m	97612205	VIS	V126	M2,5X8	9	
X6		97715007	RONDELLE	V151	MU 2,5	2	
X7		98230045	OEILLET + VIS	REF: 492959	0.02		
X8	1a	94336008	SUPPORT COUDE 14Pts	A14-LED-H	1	ANTELEC	
X9		94330007	SUPPORT LED	AST0035-9660	1	SHURTER	
X10	1m	94320003	CAVALIER FEM. ISOLE	313-1731-0-00-404	8	COMATEL	
X11		94480308	SUPPORT 28Pts LARGE		1		
X12		94480313	SUPPORT 24Pts ETROIT		11		
X13		94480305	SUPPORT 20Pts		4		
X14	1m	94480301	SUPPORT 8Pts		2		
X15		94480302	SUPPORT 16Pts		2		
X16		94480034	SUPPORT COUDE 8Pts	(6Pts UTILES)	1	ANTELEC	
X17	1a	97880003	ENTRETOISE EXALIS 4	LONGUEUR 5mm	6	ACCEL	
X18	1a	94480023	VERROUILLAGE FEMELLE	8630-01-060	2	SOURIAU	
X19	2m	97718000	ENTRETOISE LISSE	ø3 L1,5 ACIER	7		
X20	2m	97718000	ENTRETOISE ENMET 19	LONGUEUR 12	7	ACCEL	
X21	1a	97613213	VIS	F/90 M2,5X25	1		
X22		97713006	ECROU	H2,5	1		
X23	1a	97713006	ECROU	H2,5	1		
X24	3a	97110039	BOUCHE TROU METAL	7603	2	KEYSTONE	
U2			CIRCUIT INTEGRE	SCAN 18245T SSC	1	NS	SSOP56
U5			CIRCUIT INTEGRE	SN 74ABT16245 DL	1	TEXAS	SSOP48

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
U7			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U9			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U11			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U13			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U14			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U26			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U27			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U30			CIRCUIT INTEGRE	74F138SC	1	NATIONAL	SO16
U31			CIRCUIT INTEGRE	74FCT652ATSO	1	IOT	SO24L
U34			CIRCUIT INTEGRE	74FCT245ASO	1	IOT	SO20L
U35			CIRCUIT INTEGRE	SN 74ABT16244DL	1	TEXAS	SSOP48
U36			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U37			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U38			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U40			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U53			CIRCUIT INTEGRE	74FCT652ATSO	1	IOT	SO24L
U58			CIRCUIT INTEGRE	SCAN 18374T SSC	1	NS	SSOP56
U64			CIRCUIT INTEGRE	74FCT652ATSO	1	IOT	SO24L
U66			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U69			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U71			CIRCUIT INTEGRE	74FCT821SO	1	IDT	SO24L
U73			CIRCUIT INTEGRE	74FCT821SO	1	IOT	SO24L
U76			CIRCUIT INTEGRE	74FCT821SO	1	IDT	SO24L
U77			CIRCUIT INTEGRE	74FCT821SO	1	IDT	SO24L
U78			CIRCUIT INTEGRE	74FCT821SO	1	IDT	SO24L
U83			CIRCUIT INTEGRE	SCAN 18374T SSC	1	NS	SSOP56
U86			CIRCUIT INTEGRE	74FCT652ATSO	1	IOT	SO24L
U87			CIRCUIT INTEGRE	SN 74ABT16244DL	1	TEXAS	SSOP48
U92			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U93			CIRCUIT INTEGRE	SCAN 18374T SSC	1	NS	SSOP56
U95			CIRCUIT INTEGRE	SN 74ABT16245DL	1	TEXAS	SSOP48
U96			CIRCUIT INTEGRE	SCAN 18245T SSC	1	NS	SSOP56
U98			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U99			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U105			CIRCUIT INTEGRE	7406	1		SO14
U114			CIRCUIT INTEGRE	7130-LA45J	1	IDT	PLCC52
U115			CIRCUIT INTEGRE	7130-LA45J	1	IDT	PLCC52
U116			CIRCUIT INTEGRE	7130-LA45J	1	IDT	PLCC52
U117			CIRCUIT INTEGRE	7130-LA45J	1	IDT	PLCC52
U118			CIRCUIT INTEGRE	7130-LA45J	1	IDT	PLCC52
U119			CIRCUIT INTEGRE	SN 74ABT16245DL	1	TEXAS	SSOP48
U120			CIRCUIT INTEGRE	7130-LA45J	1	IDT	PLCC52
U121			CIRCUIT INTEGRE	7130-LA45J	1	IDT	PLCC52
U122			CIRCUIT INTEGRE	7130-LA45J	1	IDT	PLCC52
U123			CIRCUIT INTEGRE	SCAN 18245T SSC	1	NS	SSOP56
U124			CIRCUIT INTEGRE	74F138SC	1	TEXAS	SO16
U125			CIRCUIT INTEGRE	SCAN 18245T SSC	1	NS	SSOP56
U127	1s		CIRCUIT INTEGRE	SN 74ABT16244DL	0	TEXAS	SSOP48
U131	1m		CIRCUIT INTEGRE	74FCT157ATSO	1	IDT	SO16L
U139	1m		CIRCUIT INTEGRE	74FCT157ATSO	1	IDT	SO16L
U200	1m		CIRCUIT INTEGRE	74FCT157ATSO	1	IDT	SO16L
SW12			PONT_SOUDURE		1		
SW13			PONT_SOUDURE		1		
SW14			PONT_SOUDURE		1		
SW15			PONT_SOUDURE		1		
SW16			PONT_SOUDURE		1		
SW20			PONT_SOUDURE		1		
SW21			PONT_SOUDURE		1		
SW22			PONT_SOUDURE		1		
C1	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C2	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C3	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C4	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C5	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C6	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C7	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C8	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C9	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C10	1m		CONDENSATEUR	2C1	33pF	1206	
C11	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C12	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C13	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C14	1m		CONDENSATEUR	2C1	33pF	1206	
C15	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C16	1m		CONDENSATEUR	2C1	1nF	20%	1206
C17	1m		CONDENSATEUR	2C1	47nF	20%	1206
C18	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C20	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C21	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C22	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C23	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C24	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C25	1m		CONDENSATEUR	2C1	10 nF	20%	1206
C26	2m		CONDENSATEUR	293D	47 µF	10V	1	SPRAGUE	CASE 0
C27	1m		CONDENSATEUR	2C1	10µF	20%	1206
C28	2m		CONDENSATEUR	293D	10µF	35V	1	SPRAGUE	CASE 0

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
C29	1m		CONDENSATEUR	2C1 1nF 20%	1		1206
C30	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C31	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C32	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C33	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C34	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C35	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C36	2m		CONDENSATEUR	293D 47 µF 10V	1	SPRAGUE	CASE D
C37	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C38	2m		CONDENSATEUR	293D 47 µF 10V	1	SPRAGUE	CASE D
C39	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C40	1m		CONDENSATEUR	2C1 10nF 20%	1		1206
C41	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C42	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C43	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C44	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C45	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C46	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C47	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C48	1m		CONDENSATEUR	2C1 47nF 20%	1		1206
C49			CONDENSATEUR	2C1 100nF 20%	1		1206
C50	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C51	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C52			CONDENSATEUR	2C1 100nF 20%	1		1206
C53			CONDENSATEUR	2C1 1nF 20%	1		1206
C54			CONDENSATEUR	2C1 1nF 20%	1		1206
C55	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C56	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C57			CONDENSATEUR	2C1 100nF 20%	1		1206
C58	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C59	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C60	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C61			CONDENSATEUR	2C1 1nF 20%	1		1206
C62			CONDENSATEUR	2C1 100nF 20%	1		1206
C63			CONDENSATEUR	293D 1µF 16V	1	SPRAGUE	CASE A
C64	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C65	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C66			CONDENSATEUR	2930 1µF 16V	1	SPRAGUE	CASE A
C67			CONDENSATEUR	2C1 100nF 20%	1		1206
C68	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C69	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C70	1m		CONDENSATEUR	NPO 39pF 5%	1		1206
C71	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C72	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C73	1m		CONDENSATEUR	NPO 39pF 5%	1		1206
C75	2m		CONDENSATEUR	293D 10µF 35V	1	SPRAGUE	CASE D
C77			CONDENSATEUR	2C1 100nF 20%	1		1206
C79			CONDENSATEUR	2C1 100nF 20%	1		1206
C80			CONDENSATEUR	2C1 1nF 20%	1		1206
C81	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C82	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C83	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C84	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C85			CONDENSATEUR	2C1 1nF 20%	1		1206
C86			CONDENSATEUR	2C1 100nF 20%	1		1206
C87			CONDENSATEUR	2C1 1nF 20%	1		1206
C88			CONDENSATEUR	2C1 100nF 20%	1		1206
C89	2m		CONDENSATEUR	293D 47 µF 10V	1	SPRAGUE	CASE D
C90	2m		CONDENSATEUR	293D 47 µF 10V	1	SPRAGUE	CASE D
C91	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C92	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C93	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C94	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C95			CONDENSATEUR	2C1 1nF 20%	1		1206
C96	1m		CONDENSATEUR	2C1 1nF 20%	1		1206
C97	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C98	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C99	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C100	1m		CONDENSATEUR	2C1 47nF 20%	1		1206
C101	1m		CONDENSATEUR	2C1 10nF 20%	1		1206
C102			CONDENSATEUR	2C1 47nF 20%	1		1206
C103			CONDENSATEUR	2C1 3.3nF 20%	1		1206
C104	1m		CONDENSATEUR	2C1 47nF 20%	1		1206
C105	1m		CONDENSATEUR	2C1 1nF 20%	1		1206
C106	1m		CONDENSATEUR	2C1 47nF 20%	1		1206
C107	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C108	1m		CONDENSATEUR	2C1 1nF 20%	1		1206
C109	1m		CONDENSATEUR	2C1 47nF 20%	1		1206
C111	2m		CONDENSATEUR	293D 47 µF 10V	1	SPRAGUE	CASE D
C112	1m		CONDENSATEUR	2C1 47nF 20%	1		1206
C113			CONDENSATEUR'	2C1 100nF 20%	1		1206
C114	2m		CONDENSATEUR	293D 47 µF 10V	1	SPRAGUE	CASE D
C115			CONDENSATEUR	2C1 100nF 20%	1		1206
C116			CONDENSATEUR	2C1 1nF 20%	1		1206
C117			CONDENSATEUR	2C1 1nF 20%	1		1206
C118			CONDENSATEUR	2C1 100nF 20%	1		1206
C119			CONDENSATEUR	2C1 1nF 20%	1		1206
C120			CONDENSATEUR	2C1 100nF 20%	1		1206

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
C121			CONDENSATEUR	2C1 100nF 20%	1		1206
C122			CONDENSATEUR	293D 1µF 16V	1	SPRAGUE	CASE A
C123			CONDENSATEUR	293D 1µF 16V	1	SPRAGUE	CASE A
C124	1m		CONDENSATEUR	NPO 39pF 5%	1		1206
C125	1m		CONDENSATEUR	NPO 39pF 5%	1		1206
C126	2m		CONDENSATEUR	293D 10µF 35V	1	SPRAGUE	CASE D
C127			CONDENSATEUR	2C1 100nF 20%	1		1206
C128			CONDENSATEUR	2C1 100nF 20%	1		1206
C129			CONDENSATEUR	2C1 1nF 20%	1		1206
C130			CONDENSATEUR	2C1 1nF 20%	1		1206
C131			CONDENSATEUR	2C1 100nF 20%	1		1206
C132			CONDENSATEUR	2C1 1nF 20%	1		1206
C133			CONDENSATEUR	2C1 100nF 20%	1		1206
C134			CONDENSATEUR	2C1 1nF 20%	1		1206
C135	1m		CONDENSATEUR	2C1 1nF 20%	1		1206
C136	1m		CONDENSATEUR	2C1 47nF 20%	1		1206
C137	2m		CONDENSATEUR	293D 10µF 35V	1	SPRAGUE	CASE D
C138			CONDENSATEUR	2C1 3.3nF 20%	1		1206
C139			CONDENSATEUR	2C1 100nF 20%	1		1206
C140	1m		CONDENSATEUR	2C1 47nF 20%	1		1206
C141	1m		CONDENSATEUR	2C1 1nF 20%	1		1206
C142	1m		CONDENSATEUR	2C1 47nF 20%	1		1206
C143	1m		CONDENSATEUR	2C1 1nF 20%	1		1206
C144	1m		CONDENSATEUR	2C1 47nF 20%	1		1206
C145	1m		CONDENSATEUR	2C1 1nF 20%	1		1206
C146	1m		CONDENSATEUR	293D 47µF 10V	1	SPRAGUE	CASE D
C147	1m		CONDENSATEUR	293D 47µF 10V	1	SPRAGUE	CASE D
C148	1m		CONDENSATEUR	2C1 33pF 20%	1		1206
C149	1m		CONDENSATEUR	2C1 33pF 20%	1		1206
C150	1m		CONDENSATEUR	2C1 33pF 20%	1		1206
C151	1m		CONDENSATEUR	2C1 33pF 20%	1		1206
C152			CONDENSATEUR	2C1 100nF 20%	1		1206
C153	2s		CONDENSATEUR	2C1 100nF 20%	0		1206
C154	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C155	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C156	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C157	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C158	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C159	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C160	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C161	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C162	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C163	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C164	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C165	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C166	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C167	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C168	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C169	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C170	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C171	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C172	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C173	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C174	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C175	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C176	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C177	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C178	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C179	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C180	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C181	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C182	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C183	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C184	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C185	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C186	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C187	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C188	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C189	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C190	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C191	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C192	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C193	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C194	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C195	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C196	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C197	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C198	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C199	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C200	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C201	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C202	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C203	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C204	2m		CONDENSATEUR	293D 47 µF 10V	1	SPRAGUE	CASE D
C205	2m		CONDENSATEUR	293D 47 µF 10V	1	SPRAGUE	CASE D
C206	2m		CONDENSATEUR	293D 47 µF 10V	1	SPRAGUE	CASE D
C207	2m		CONDENSATEUR	293D 47 µF 10V	1	SPRAGUE	CASE D
C210	1m		CONDENSATEUR	2C1 100nF 20%	1		1206

Optical Madisoni 2 Madi Input Board   42.125.303.01
Coax Madisoni 2 Madi Input Board   42.125.303.11

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR			QTE	FABRIQ.	BOITIER
C211	2s	CONDENSATEUR	2C1	100nF	20%		0		1206
C212		CONDENSATEUR	2C1	100nF	20%		1		1206
C213	2m	CONDENSATEUR	2930	47 µF	10V		1	SPRAGUE	CASE D
C214	2m	CONDENSATEUR	2930	47 µF	10V		1	SPRAGUE	CASE D
C215	1m	CONDENSATEUR	2C1	10nF	20%		1		1206
C216	1m	CONDENSATEUR	2C1	47nF	20%		1		1206
C217	1m	CONDENSATEUR	2C1	1nF	20%		1		1206
C222	1m	CONDENSATEUR	2C1	1nF	20%		1		1206
C223	1m	CONDENSATEUR	2C1	1nF	20%		1		1206
C224	1m	CONDENSATEUR	2C1	47nF	20%		1		1206
C228	1m	CONDENSATEUR	2C1	10nF	20%		1		1206
C229		CONDENSATEUR	2C1	100nF	20%		1		1206
C230	2m	CONDENSATEUR	2930	10µF	35V		1	SPRAGUE	CASE D
C231	2m	CONDENSATEUR	2930	10µF	35V		1	SPRAGUE	CASE D
C232		CONDENSATEUR	2C1	100nF	20%		1		1206
C233	2a	CONDENSATEUR	2C1	10nF	20%		1		1206
C234	1a	CONDENSATEUR	2C1	100nF	20%		1		1206
C235	1a	CONDENSATEUR	2C1	100nF	20%		1		1206
C236	1a	CONDENSATEUR	2C1	100nF	20%		1		1206
C237	1a	CONDENSATEUR	2C1	100nF	20%		1		1206
C238	1a	CONDENSATEUR	2C1	100nF	20%		1		1206
C239	1a	CONDENSATEUR	2C1	100nF	20%		1		1206
C240	1a	CONDENSATEUR	2C1	100nF	20%		1		1206
C241	1a	CONDENSATEUR	2C1	100nF	20%		1		1206
C300		CONDENSATEUR	2C1	100nF	20%		1		1206
C301		CONDENSATEUR	2C1	100nF	20%		1		1206
C302		CONDENSATEUR	2C1	100nF	20%		1		1206
C303		CONDENSATEUR	2C1	100nF	20%		1		1206
C304	2m	CONDENSATEUR	2930	47 µF	10V		1	SPRAGUE	CASE 0
C305	2m	CONDENSATEUR	2930	47 µF	10V		1	SPRAGUE	CASE D
C306		CONDENSATEUR	2C1	100nF	20%		1		1206
C307	2m	CONDENSATEUR	2930	47 µF	10V		1	SPRAGUE	CASE D
C308	2m	CONDENSATEUR	2930	47 µF	10V		1	SPRAGUE	CASE D
C309	2m	CONDENSATEUR	2930	47 µF	10V		1	SPRAGUE	CASE D
C310	2m	CONDENSATEUR	2930	47 µF	10V		1	SPRAGUE	CASE 0
C311	2m	CONDENSATEUR	2930	47 µF	10V		1	SPRAGUE	CASE 0
C312	2m	CONDENSATEUR	2930	47 µF	10V		1	SPRAGUE	CASE 0
C313	2m	CONDENSATEUR	2930	47 µF	10V		1	SPRAGUE	CASE 0
C314	2m	CONDENSATEUR	2930	47 µF	10V		1	SPRAGUE	CASE 0
R1		RESISTANCE		75Ω	1%	1/8W	1		1206
R2	1m	RESISTANCE		330Ω	1%	1/8W	1		1206
R3		RESISTANCE		1.2K	1%	1/8W	1		1206
R4		RESISTANCE		75Ω	1%	1/8W	1		1206
R5		RESISTANCE		75Ω	1%	1/8W	1		1206
R6		RESISTANCE		330Ω	1%	1/8W	1		1206
R7	1m	RESISTANCE		10K	1%	1/8W	1		1206
R8	1m	RESISTANCE		1K	1%	1/8W	1		1206
R9	1m	RESISTANCE		220Ω	1%	1/8W	1		1206
R10		RESISTANCE		75Ω	1%	1/8W	1		1206
R11	1m	RESISTANCE		1K	1%	1/8W	1		1206
R12		RESISTANCE		1.2K	1%	1/8W	1		1206
R13		RESISTANCE		75Ω	1%	1/8W	1		1206
R14		RESISTANCE		75Ω	1%	1/8W	1		1206
R15		RESISTANCE		330Ω	1%	1/8W	1		1206
R16	1m	RESISTANCE		4.75K	1%	1/8W	1		1206
R17		RESISTANCE		220Ω	1%	1/8W	1		1206
R18		RESISTANCE		330Ω	1%	1/8W	1		1206
R19	2a	RESISTANCE		1K	1%	1/8W	1		1206
R20		RESISTANCE		330Ω	1%	1/8W	1		1206
R21		RESISTANCE		75Ω	1%	1/8W	1		1206
R22		RESISTANCE		100Ω	1%	1/8W	1		1206
R23		RESISTANCE		100Ω	1%	1/8W	1		1206
R24	1m	RESISTANCE		9.76K	1%	1/8W	1		1206
R25	1m	RESISTANCE		1K	1%	1/8W	1		1206
R26		RESISTANCE		330Ω	1%	1/8W	1		1206
R27	2a	RESISTANCE		1K	1%	1/8W	1		1206
R28		RESISTANCE		330Ω	1%	1/8W	1		1206
R29		RESISTANCE		75Ω	1%	1/8W	1		1206
R30		RESISTANCE		100Ω	1%	1/8W	1		1206
R31	1m	RESISTANCE		56,2Ω	1%	1/8W	1		1206
R32	2a	RESISTANCE		1K	1%	1/8W	1		1206
R35		RESISTANCE		100Ω	1%	1/8W	1		1206
R37	1m	RESISTANCE		220Ω	1%	1/8W	1		1206
R38	1m	RESISTANCE		330Ω	1%	1/8W	1		1206
R40	1m	RESISTANCE		56,2Ω	1%	1/8W	1		1206
R41	1m	RESISTANCE		220Ω	1%	1/8W	1		1206
R42	1m	RESISTANCE		330Ω	1%	1/8W	1		1206
R44	1m	RESISTANCE		1K	1%	1/8W	1		1206
R50	1m	RESISTANCE		1K	1%	1/8W	1		1206
R51	1m	RESISTANCE		1K	1%	1/8W	1		1206
R52	1m	RESISTANCE		1.5K	1%	1/8W	1		1206
R53	1m	RESISTANCE		1.5K	1%	1/8W	1		1206
R54	1m	RESISTANCE		56,2Ω	1%	1/8W	1		1206
R55	1m	RESISTANCE		220Ω	1%	1/8W	1		1206
R56	1m	RESISTANCE		330Ω	1%	1/8W	1		1206
R57	1m	RESISTANCE		56,2Ω	1%	1/8W	1		1206
R58	1m	RESISTANCE		220Ω	1%	1/8W	1		1206
R59	1m	RESISTANCE		330Ω	1%	1/8W	1		1206

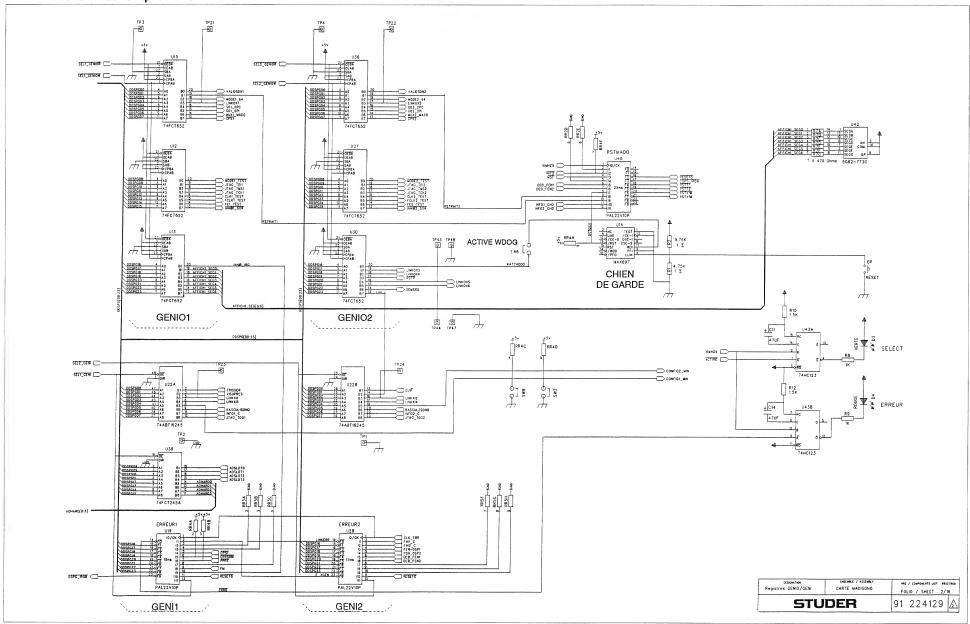| REPERE	IND	COMPOSANT	DESIGNATION	VALEUR			QTE	FABRIQ.	BOITIER
R60	1m		RESISTANCE	56,2Ω	1%	1/8W	1		1206
R61	1m		RESISTANCE	220Ω	1%	1/8W	1		1206
R62	1m		RESISTANCE	330Ω	1%	1/8W	1		1206
R63	1m		RESISTANCE	56,2Ω	1%	1/8W	1		1206
R64	1m		RESISTANCE	220Ω	1%	1/8W	1		1206
R65			RESISTANCE	82,5Ω	1%	1/8W	1		1206
R66			RESISTANCE	82,5Ω	1%	1/8W	1		1206
R67			RESISTANCE	130Ω	1%	1/8W	1		1206
R68			RESISTANCE	130Ω	1%	1/8W	1		1206
R69			RESISTANCE	82,5Ω	1%	1/8W	1		1206
R70			RESISTANCE	82,5Ω	1%	1/8W	1		1206
R71			RESISTANCE	130Ω	1%	1/8W	1		1206
R72	1m		RESISTANCE	130Ω	1%	1/8W	1		1206
R75			RESISTANCE	75Ω	1%	1/8W	1		1206
R76			RESISTANCE	75Ω	1%	1/8W	1		1206
R77	1a		RESISTANCE	1K	1%	1/8W	1		1206
R78	1a		RESISTANCE	1K	1%	1/8W	1		1206

SCHEMATA / CIRCUIT DIAGRAMS

Optical Madisono 2 Madi Output Board   42.125.304.01
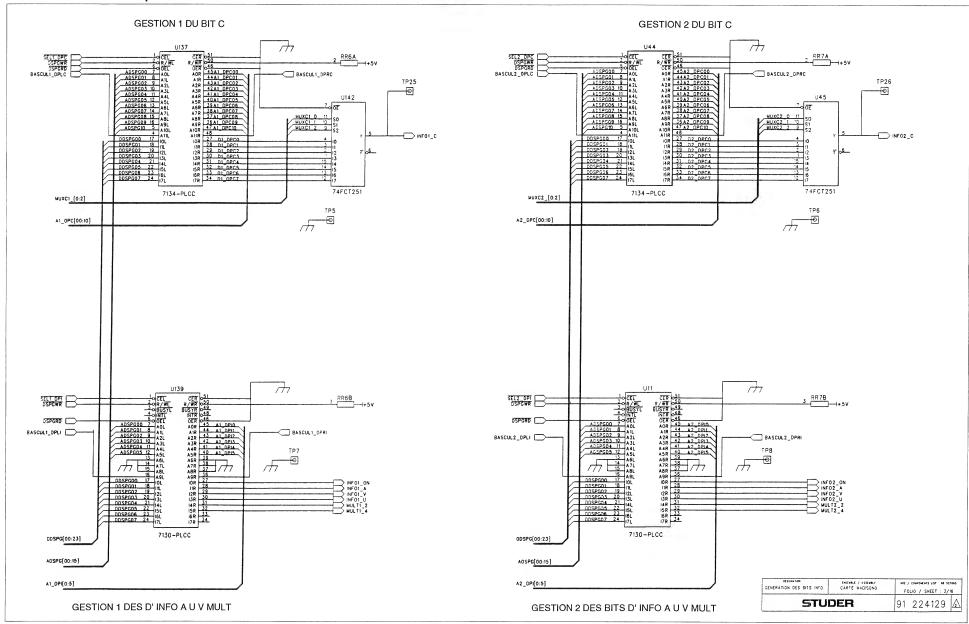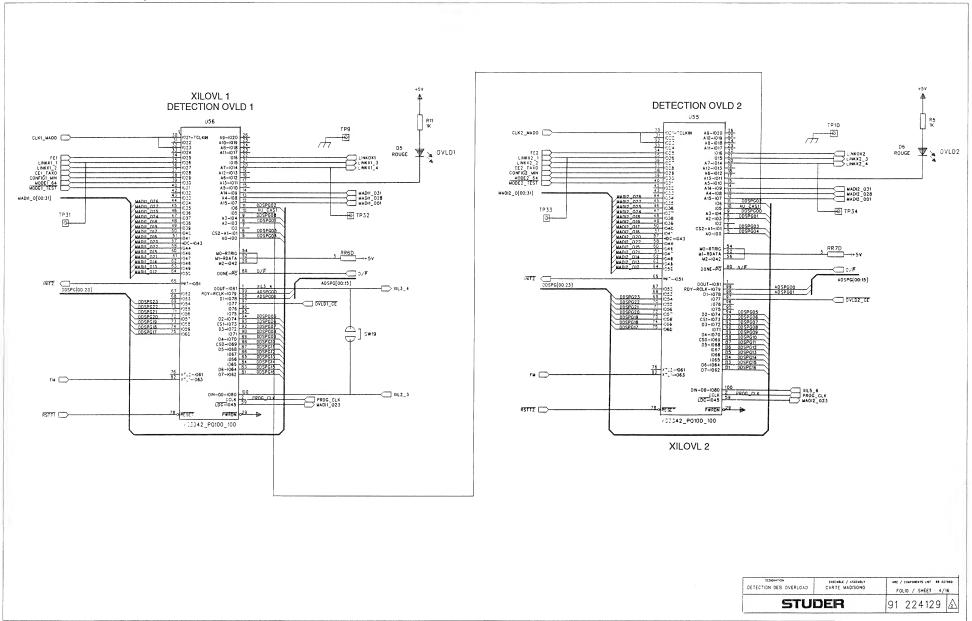**Coax Madisono 2 Madi Output Board   42.125.304.11**

DSP DE GESTION

TRANSMIT
RECEIVE
VISUPRES

MAX233

HOST_PAR[0:7]

HR_W3
HEN_OPAR
HACKG

H_A[0:2]

OSPG_IRQA
OSPG_IRQB

16MHZ5

74F74

CLK_DSPG

MODECOD1
U10

PAL22V10P

RR2A

RESETG

PROGRAM ROM
(MOPROM)

27C256

OSP56001-FC33

OSC1

OSC
33 MHZ

CLK_OSC

U16A
74FCT244

CLK_ERR

RR2H

8K   32K

STW3   SW1

MODECOD2
U5

PAL22V10P

RR2B

DATA RAM

MODECOD3
U49

DSPGRD
DSPGWR

FEN_OSP1
FEN_OSP2

PAL22V10P

RR2C

71256-L35Y
U7

71256-L35Y
U8

71256-L35Y
U9

71256-L35Y

DSP DE GESTION

STUDER

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

DESIGNATION	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST 88527868
Registres GENIO/GENI	CARTE MADISONO	FOLIO / SHEET : 2/16
STUDER		91 224129

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

GESTION 1 DU BIT C

U137

SEL1_DPC
DSPGWR
DSPGRD
BASCUL1_DPLC

CEL
R/WL
OEL
A0L
A1L
A2L
A3L
A4L
A5L
A6L
A7L
A8L
A9L
A10L
A11L

CER
R/WR
OER
A0R
A1R
A2R
A3R
A4R
A5R
A6R
A7R
A8R
A9R
A10R

RR6A
+5V

BASCUL1_DPRC

ADSPG00
ADSPG01
ADSPG02
ADSPG03
ADSPG04
ADSPG05
ADSPG06
ADSPG07
ADSPG08
ADSPG09
ADSPG10

45 A1_DPC00
44 A1_DPC01
43 A1_DPC02
42 A1_DPC03
41 A1_DPC04
40 A1_DPC05
39 A1_DPC06
38 A1_DPC07
37 A1_DPC08
36 A1_DPC09
47 A1_DPC10

TP25

U142

OE

MUXC1_0 S0
MUXC1_1 S1
MUXC1_2 S2

DDSPG00
DDSPG01
DDSPG02
DDSPG03
DDSPG04
DDSPG05
DDSPG06
DDSPG07

I0L
I1L
I2L
I3L
I4L
I5L
I6L
I7L

I0R
I1R
I2R
I3R
I4R
I5R
I6R
I7R

27 D1_DPC0
28 D1_DPC1
29 D1_DPC2
30 D1_DPC3
31 D1_DPC4
32 D1_DPC5
33 D1_DPC6
34 D1_DPC7

Y   INFO1_C

7134-PLCC

74FCT251

MUXC1_[0:2]

TP5

A1_DPC[00:10]

GESTION 2 DU BIT C

U44

SEL2_DPC
DSPGWR
DSPGRD
BASCUL2_DPLC

CEL
R/WL
OEL
A0L
A1L
A2L
A3L
A4L
A5L
A6L
A7L
A8L
A9L
A10L
A11L

CER
R/WR
OER
A0R
A1R
A2R
A3R
A4R
A5R
A6R
A7R
A8R
A9R
A10R

RR7A
+5V

BASCUL2_DPRC

ADSPG00
ADSPG01
ADSPG02
ADSPG03
ADSPG04
ADSPG05
ADSPG06
ADSPG07
ADSPG08
ADSPG09
ADSPG10

45 A2_DPC00
44 A2_DPC01
43 A2_DPC02
42 A2_DPC03
41 A2_DPC04
40 A2_DPC05
39 A2_DPC06
38 A2_DPC07
37 A2_DPC08
36 A2_DPC09
47 A2_DPC10

TP26

U45

OE

MUXC2_0 S0
MUXC2_1 S1
MUXC2_2 S2

DDSPG00
DDSPG01
DDSPG02
DDSPG03
DDSPG04
DDSPG05
DDSPG06
DDSPG07

I0L
I1L
I2L
I3L
I4L
I5L
I6L
I7L

I0R
I1R
I2R
I3R
I4R
I5R
I6R
I7R

27 D2_DPC0
28 D2_DPC1
29 D2_DPC2
30 D2_DPC3
31 D2_DPC4
32 D2_DPC5
33 D2_DPC6
34 D2_DPC7

Y   INFO2_C

7134-PLCC

74FCT251

MUXC2_[0:2]

TP6

A2_DPC[00:10]

U139

SEL1_DPI
DSPGWR
DSPGRD
BASCUL1_DPLI

CEL
R/WL
BUSYL
INTL
OEL
A0L
A1L
A2L
A3L
A4L
A5L

CER
R/WR
BUSYR
INTR
OER
A0R
A1R
A2R
A3R
A4R
A5R
A6R
A7R
A8R
A9R

RR6B
+5V

BASCUL1_DPRI

ADSPG00
ADSPG01
ADSPG02
ADSPG03
ADSPG04
ADSPG05

44 A1_DPI1
43 A1_DPI2
42 A1_DPI3
41 A1_DPI4
40 A1_DPI5

TP7

A6L
A7L
A8L
A9L

DDSPG00
DDSPG01
DDSPG02
DDSPG03
DDSPG04
DDSPG05
DDSPG06
DDSPG07

I0L
I1L
I2L
I3L
I4L
I5L
I6L
I7L

I0R
I1R
I2R
I3R
I4R
I5R
I6R
I7R

27 INFO1_ON
28 INFO1_A
29 INFO1_V
30 INFO1_U
31 MULT1_2
32 MULT1_4

7130-PLCC

DDSPG[00:23]

ADSPG[00:15]

A1_DPI[0:5]

GESTION 1 DES D' INFO A U V MULT

U11

SEL2_DPI
DSPGWR
DSPGRD
BASCUL2_DPLI

CEL
R/WL
BUSYL
INTL
OEL
A0L
A1L
A2L
A3L
A4L
A5L

CER
R/WR
BUSYR
INTR
OER
A0R
A1R
A2R
A3R
A4R
A5R
A6R
A7R
A8R
A9R

RR7B
+5V

BASCUL2_DPRI

ADSPG00
ADSPG01
ADSPG02
ADSPG03
ADSPG04
ADSPG05

44 A2_DPI1
43 A2_DPI2
42 A2_DPI3
41 A2_DPI4
40 A2_DPI5

TP8

A6L
A7L
A8L
A9L

DDSPG00
DDSPG01
DDSPG02
DDSPG03
DDSPG04
DDSPG05
DDSPG06
DDSPG07

I0L
I1L
I2L
I3L
I4L
I5L
I6L
I7L

I0R
I1R
I2R
I3R
I4R
I5R
I6R
I7R

27 INFO2_ON
28 INFO2_A
29 INFO2_V
30 INFO2_U
31 MULT2_2
32 MULT2_4

7130-PLCC

DDSPG[00:23]

A0SPG[00:15]

A2_DP[0:5]

GESTION 2 DES BITS D' INFO A U V MULT

DESIGNATION	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST 88 527860
GENERATION DES BITS INFO	CARTE MADISONO	FOLIO / SHEET : 3/16
STUDER		91 224129

STUDER

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

XILOVL 1
DETECTION OVLD 1

DETECTION OVLD 2

XILOVL 2

DESIGNATION	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST 88 327860
DETECTION DES OVERLOAD	CARTE MADISONO	FOLIO / SHEET 4/16
STUDER		91 224129

Optical Madisono 2 Madi Output Board 42.125.304.01
Coax Madisono 2 Madi Output Board 42.125.304.11

INTERFACE BUS DEBUG

GESTION D' INTERFACE BUS PARAMETRE

SECTION 4

STUDER

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

DESIGNATION	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST : 88 527860
TAXI 1 EMETTEUR	CARTE MADISONO	FOLIO / SHEET : 6/16

STUDER   91 224129

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

XILMUL 1

XILGEN 1

XILINX 1	DESIGNATION	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST : 88 527860
MULTIPLIEUR/LIMITEUR		CARTE MADISONO	FOLIO / SHEET : 8/16
STUDER			91 224129

Optical Madisono 2 Madi Output Board 42.125.304.01
Coax Madisono 2 Madi Output Board 42.125.304.11

TP13

TP40

TP14

XILMUL 2

U84

SON2_0[00:23]

MADI2_0[00:31]

CLK2_MADO
FE2
LINKX2_3
LINKX2_4

TP39

TP28

ÎNIT2

FCLK2

RSTT2

30 I021-TCLKIN
31 I022
32 I023
33 I024
34 I025
35 I026
36 I027
37 I028
38 I029
39 I030
40 I031
42 I032
43 I033
44 I034
45 I035
46 I036
47 I037
48 I038
49 I039
50 I040
51 I041
HOC-I043
58 I044
60 I046
61 I047
62 I048
63 I049
64 I050
65 INIT-I051
67 I052
68 I053
69 I054
70 I055
71 I056
72 I057
73 I058
74 I059
75 I060

A9-I020
A10-I019
A8-I018
A11-I017
I016
I015
A7-I014
A12-I013
A6-I012
A13-I011
A5-I010
A14-I09
A4-I08
A15-I07
I06
I05
A3-I04
A2-I03
I02
CS2-A1-I01
A0-I00

MADI2_010
MADI2_009
MADI2_008
MADI2_012
MADI2_011
MADI2_005
MADI2_004
MADI2_006
MADI2_007
MADI2_014
MADI2_013
SON2_000
SON2_001
MADI2_015
SON2_004
SON2_006
SON2_007
SON2_008
SON2_009
SON2_010

CE2_TAXO
MADO2_OEI
STOCK2_MADO
MODE2_TEST
MADO2_OE3
MADO2_OE0
EN_STRB2
MADO2_OE2
INHIB2_SOR
LINKX2_6

ACK2_TAXO
MULT2_2
MULT2_4
CONFIG2_MIN
MODE2_64

VALIDSON2

MO-RTRIG
M1-RDATA
M2-I042

OONE-PG

DOUT-I081
ROY-RCLK-I079
O1-I078
I077
I076
I075
O2-I074
CS1-I073
D3-I072
I071
O4-I070
CSO-I069
D5-I068
I067
I066
I065
O6-I064
O7-I062

XTL2-I061
XTL1-I063

DIN-DO-I080
CCLK
LDC-I045

RESET   PWRDN

XC3042-PQ100_125

RR9C +5V

D/F

XIL5_6
BASCUL2SONO
BASCUL2SONO
LINKXI2
AU_CAS2
LINKOX4

XIL4_5
PROG_CLK

XILGEN 2

U88

CLK2_MADO
CE2_TAXO
LINKX2_6
MODE2_64
CONFIG2_MIN

TP41

GO2_DPC
FE2

TP42

MUXC2_[0:2]
MODE2_TEST
LINKX2_1
LINKX2_2

SONINF2_RD
SONINF2_OE
DSPGRD
DSPGWR
AU_CAS3
LINKXI4
LINKOX6

ÎNIT2

A2_MADINFO
A2_MADINF1
A2_MADINF2
A2_MADINF3
A2_MADINF4
A2_MADINF5

A2_MADINF[0:5]

FN2_C

FCLK2

RSTT2

30 I021-TCLKIN
31 I022
32 I023
33 I024
34 I025
35 I026
36 I027
37 I028
38 I029
39 I030
40 I031
42 I032
43 I033
44 I034
45 I035
46 I036
47 I037
48 I038
49 I039
50 I040
51 I041
HOC-I043
58 I044
60 I046
61 I047
62 I048
63 I049
64 I050
65 INIT-I051
67 I052
68 I053
69 I054
70 I055
71 I056
72 I057
73 I058
74 I059
75 I060

A9-I020
A10-I019
A8-I018
A11-I017
I016
I015
A7-I014
A12-I013
A6-I012
A13-I011
A5-I010
A14-I09
A4-I08
A15-I07
I06
I05
A3-I04
A2-I03
CS2-A1-I01
A0-I00

MUXC2_2
MUXC2_1
MUXC2_0

A2_SONO0
A2_SONO1
A2_SONO2
A2_SONO3
A2_SONO4
A2_SONO5
A2_DPC00
A2_DPC01
A2_DPC02
A2_DPC03
A2_DPC04
A2_DPC05
A2_DPC07
A2_DPC08
A2_DPC09
A2_DPC10

A2_SONO[0:5]

A2_OPC[00:10]

BASCUL2_OPRC
SONO2_OE
BASCUL2_DPLC

MO-RTRIG
M1-RDATA
M2-I042

OONE-PG

DOUT-IC81
ROY-RCLK-IO79
I077
I076
I075
D2-I074
CS1-I073
D3-I072
I071
O4-I070
CSO-I069
D5-I068
I067
I066
I065
D6-I064
D7-I062

XTL2-I061
XTL1-I063

DIN-DO-I080
CCLK
LDC-I045

RESET   PWRDN

XC3042-PQ100_1C0

RR7H +5V

D/F
A2_OPI[0:5]
XIL4_5

A2_DPI0
A2_DPI1
A2_DPI2
A2_DPI3
A2_DPI4
A2_DPI5

INFO2_CHO
BASCUL2_OPLI
BASCUL2_DPRI
GO2_DPI
SOND2_RD
INFO2_BSYNC
CPS2
DEB_FEN2
FEN_OSP2

XIL3_4
PROG_CLK

TP30

STUDER

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

BUFFERS DSP DE GESTION
--> DPRAM BUS SON 1

GENERATEUR DE PARITE 1

U26A
74ABT16245

U26B
74ABT16245

U29A
74ABT16245

U29B
74ABT16245

U6A
74ABT16245

U6B
74ABT16245

U31
74F280

U32
74F280

U33
74F280

U34
74F280

| DESIGNATION | ENSEMBLE / ASSEMBLY | NRE / COMPONENTS LIST 88 527840 |
| INTERFACE DSPG/BUS SCN 1 | CARTE MADISONO | FOLIO / SHEET : 10/16 |

STUDER   91 224129

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

BUFFERS DSP DE GESTION
— — > DPRAM BUS SON 2

GENERATEUR DE PARITE 2

STUDER

Optical Madisono 2 Madi Output Board 42.125.304.01
Coax Madisono 2 Madi Output Board 42.125.304.11

DESIGNATION	ENSEMBLE / ASSEMBLY	HRE / COMPONENTS LIST : 88 527860
INTERFACE BUS SON	CARTE MADISONO	FOLIO / SHEET : 12/16

STUDER   91 224129

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

DPRAM BUS SON 1

INFO BUS SON 1

DPRAM BUS SON 2

INFO BUS SON 2

DESIGNATION	ENSEMBLE / ASSEMBLY	NPE / COMPONENTS LIST : PB 327860
DPRAM BUS SON	CARTE MADISONO	FOLIO / SHEET : 13/16

STUDER   91 224129

SECTION 4

STUDER

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

NB: La terminaison de la ligne (en fin de piste)
est accordee en impedance.
L'adaptation est faite soit par l'ensemble 220R/330R
soit par l'ensemble 56R/33pF.

DESIGNATION	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST 88 527890
HORLOGES ET TERMINAISONS	CARTE MADISON OUT	FOLIO / SHEET : 14/16

STUDER   91 224129

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

CONNECTEUR SUPERIEUR

RANGEE A	RANGEE B	RANGEE C
J5-A1	J5-B1 MGND	J5-C1
J5-A2	J5-B2	J5-C2
J5-A3	J5-B3	J5-C3
J5-A4	J5-B4	J5-C4
J5-A5	J5-B5	J5-C5
J5-A6	J5-B6 GND	J5-C6
J5-A7	J5-B7 +5V	J5-C7
J5-A8	J5-B8 ADSLOT3	J5-C8
J5-A9	J5-B9 ADSLOT2	J5-C9
J5-A10	J5-B10 ADSLOT1	J5-C10
J5-A11	J5-B11 ADSLOT0	J5-C11
J5-A12	J5-B12 GND	J5-C12
J5-A13	J5-B13	J5-C13
J5-A14	J5-B14	J5-C14
J5-A15	J5-B15 GND	J5-C15
J5-A16	J5-B16	J5-C16
J5-A17	J5-B17	J5-C17
J5-A18	J5-B18	J5-C18
J5-A19	J5-B19	J5-C19
J5-A20	J5-B20	J5-C20
J5-A21	J5-B21	J5-C21
J5-A22	J5-B22	J5-C22
J5-A23	J5-B23	J5-C23
J5-A24	J5-B24	J5-C24
J5-A25	J5-B25	J5-C25
J5-A26	J5-B26	J5-C26
J5-A27	J5-B27	J5-C27
J5-A28	J5-B28	J5-C28
J5-A29	J5-B29	J5-C29
J5-A30	J5-B30	J5-C30
J5-A31	J5-B31	J5-C31
J5-A32	J5-B32 MGND	J5-C32

CONNECTEUR MILIEU

RANGEE A	RANGEE B	RANGEE C
J2-A1 ADR0	J2-B1 ADR1	J2-C1 ADR2
J2-A2 ADR3	J2-B2 ADR4	J2-C2 ADR5
J2-A3 ADR6	J2-B3 ADW5	J2-C3 ADW6
J2-A4 ADW0	J2-B4	J2-C4 TRSF
J2-A5 ADW1	J2-B5	J2-C5 SEWDD
J2-A6 ADW2	J2-B6	J2-C6 SEWD1
J2-A7 ADW3	J2-B7	J2-C7 SEWD2
J2-A8 ADW4	J2-B8	J2-C8 SEWD3
J2-A9 GND	J2-B9	J2-C9 GND
J2-A10	J2-B10	J2-C10 SDD0
J2-A11 GND	J2-B11	J2-C11 SDD1
J2-A12 SEW12	J2-B12 SEW4	J2-C12 SDD2
J2-A13 SEW13	J2-B13 SEW5	J2-C13 SDD3
J2-A14 SEW14	J2-B14 SEW6	J2-C14 SDD4
J2-A15 GND	J2-B15 SEW7	J2-C15 SDD5
J2-A16 SEW15	J2-B16 SEW8	J2-C16 SDD6
J2-A17 GND	J2-B17 SEW9	J2-C17 SDD7
J2-A18 SER0	J2-B18 SEW10	J2-C18 SDD8
J2-A19 GND	J2-B19 SEW11	J2-C19 SDD9
J2-A20 SER1	J2-B20 GND	J2-C20 SD1D
J2-A21	J2-B21 SER2	J2-C21 SD11
J2-A22	J2-B22 SER3	J2-C22 SD12
J2-A23 SD28	J2-B23 GND	J2-C23 SD13
J2-A24 SD29	J2-B24 SD21	J2-C24 SD14
J2-A25 SD30	J2-B25 SD22	J2-C25 SD15
J2-A26 SD31	J2-B26 SD23	J2-C26 SD16
J2-A27 DP0	J2-B27 SD24	J2-C27 SD17
J2-A28 DP1	J2-B28 SD25	J2-C28 SD18
J2-A29 DP2	J2-B29 SD26	J2-C29 SD19
J2-A30 DP3	J2-B30 SD27	J2-C30 SD20
J2-A31	J2-B31	J2-C31
J2-A32 +5V	J2-B32 +5V	J2-C32 +5V

CONNECTEUR INFERIEUR

RANGEE A	RANGEE B	RANGEE C
J4-A1	J4-B1	J4-C1 BHOST0
J4-A2	J4-B2	J4-C2 BHOST1
J4-A3	J4-B3	J4-C3 BHOST2
J4-A4	J4-B4	J4-C4 BHOST3
J4-A5	J4-B5	J4-C5 BHOST4
J4-A6	J4-B6	J4-C6 BHOST5
J4-A7	J4-B7	J4-C7 BHOST6
J4-A8	J4-B8	J4-C8 BHOST7
J4-A9 GND	J4-B9	J4-C9 GND
J4-A10 BFE	J4-B10	J4-C10
J4-A11 GND	J4-B11	J4-C11 HDSTPAR
J4-A12 BHT2	J4-B12	J4-C12 HOSTADD
J4-A13	J4-B13	J4-C13 HOSTAD1
J4-A14 BHT1	J4-B14	J4-C14 HOSTAD2
J4-A15 GND	J4-B15	J4-C15 HOSTR
J4-A16 BHMT	J4-B16	J4-C16 HOSTACK
J4-A17 GND	J4-B17	J4-C17 HOSTEW
J4-A18	J4-B18	J4-C18 HDSTSEL
J4-A19 GND	J4-B19	J4-C19 HOSTREQ
J4-A20 BFM	J4-B20 GND	J4-C20
J4-A21	J4-B21	J4-C21 HRSQ
J4-A22	J4-B22	J4-C22 SRG
J4-A23	J4-B23 GND	J4-C23
J4-A24 BFCLK	J4-B24	J4-C24 BTRIGGER
J4-A25	J4-B25	J4-C25
J4-A26 BRESET	J4-B26	J4-C26 ADSR03
J4-A27	J4-B27	J4-C27 ADSR02
J4-A28	J4-B28	J4-C28 ADSR01
J4-A29	J4-B29	J4-C29 ADSR00
J4-A30	J4-B30	J4-C30
J4-A31 MGND	J4-B31	J4-C31 MGND
J4-A32 +5V	J4-B32 +5V	J4-C32 +5V

CONNECTEUR DEBUG

J6-1	VISUPRES
J6-2	RECEIVE
J6-3	TRANSMIT
J6-4	
J6-5	GND
J6-6	
J6-7	
J6-8	
J6-9	

CONNECTEUR PROG XILINX

J3-1	+5V
J3-2	GND
J3-3	
J3-4	PROG_CLK
J3-5	DIP
J3-6	DIN

DESIGNATION CONNECTEURS	ENSEMBLE / ASSEMBLY CARTE MADISONO	NRE / COMPONENTS LIST : 88 527860
		FOLIO / SHEET : 15/16
	STUDER	91 224129

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

CARTE MADISONO

+5V

CONDENSATEURS DECOUPLAGE
COUCHES D'ALIMENTATIONS

+C221	+C222	+C218	+C225	+C224	+C223	+C225	+C220	+C205	+C206	+C207	+C219
47UF	47UF	47UF	47UF	47UF	47UF	47UF	47UF	47UF	47UF	47UF	47UF

CONDENSATEURS
DECOUPLAGE
BOITIERS

C154 C155 C156 C157 C158 C159 C160 C161 C162 C163 C164 C165 C166 C167 C168 C169 C170 C171 C172 C173 C174 C175 C176 C177 C178 C179 C180 C181 C182 C183 C184 C185 C186 C187 C188 C189 C190 C191 C192 C193 C194 C195 C196 C197 C198 C199 C200 C201 C202 C203   50 X 10 nF

C1 C2 C3 C4 C5 C6 C7 C9 C23 C30 C44 C55 C64 C71 C82 C91 C97 C107 C45 C31 C24 C10 C83 C72 C65 C56 C92 C98 C18 C19 C20 C15 C33 C46 C50 C51 C47 C58 C59 C60 C68 C69 C81 C93 C99 C94 C84   50 X 10 nF

C37 C39 C12 C21 C13 C8 C22 C27 C25 C41 C42 C43   12 X 10nf

DESIGNATION	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST 88 527860
CAPACITES DE DECOUPLAGE	CARTE MADISONO	FOLIO / SHEET : 16/16

STUDER   91 224129

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

SECTION 4

STUDER

Optical Madisono 2 Madi Output Board 42.125.304.01
Coax Madisono 2 Madi Output Board 42.125.304.11

MODIF.: IND. Xa=ajout - IND. Xmm=modif. ref. et/ou valeur - IND. Xs=suppression

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
A1		91224129	SCHEMA		1		
A2		91224130	FILM CIRCUIT		1		
A3		30224130	TEST DE CONFORMITE		1		
A4		91224131	FILM DE SERIGRAPHIE		1		
A5		91224132	FILM EPARGNE SOUDURE		1		
A6		91224133	FILM PATE A BRASER		1		
A7		30224133	ECRAN PATE A BRASER		1		
A8		91122569	PLAN DE FABRICATION		1		
A9		30122569	OUTIL DE FABRICATION		1		
A10		91122570	USINAGE FACE AVANT		1		
A11		91224134	FILM SERIGRAPHIE FACE AVANT		1		
A12		91224135	PLAN DE SERIGRAPHIE FACE AVANT		1		
A13		30224135	OUTIL DE SERIGRAPHIE FACE AVANT		1		
A14	1m	91815561	FILM SERIG.POIGNEE FACE AVANT REP. D10		1		
A15		91830750	PLAN DE SERIGRAPHIE POIGNEE FACE AVANT		1		
A16		30830750	OUTIL DE SERIGRAPHIE POIGNEE FACE AVANT		1		
A17		91815505	ETIQUETTE REPERE CONNECTEUR		1		
A18		91316870	RAIDISSEUR		1		
A19		91122571	PLAN D'EQUIPEMENT		1		
A20	5m	91830799	BLINDAGE		2		
A21	1a	91830800	PATTE DE FIXATION		1		
A22	1a	91815597	VIS M2,5x14		6		
A23	6a	91830884	PLAN DE CONFIGURATION CARTE		1		
D1		95222854	DIODE	1N4448	1		
D2		95129000	DIODE	BAT47	1		
D3		95163002	LED VERT	HLMP1790	1		
D4		95163000	LED ROUGE	HLMP1790	1		
D5	1a	95110015	LED OIA :1,8 ROUGE	LTL709R (223945)	1	ORBITEC	
D6	1a	95110015	LED OIA :1,8 ROUGE	LTL709R (223945)	1	ORBITEC	
D7	1a	95110015	LED OIA :1,8 ROUGE	LTL709R (223945)	1	ORBITEC	
D9		95222854	DIODE	1N4448	1		
D10		95129000	DIODE	BAT47	1		
F1	6m		NEANT				
F2	6m		NEANT				
J2		94410049	CONNECT DIN 96Pts F	COUDE MALE		SOURIAU	
J3	1s	94450009	REPART MINI WRAP	385-0358-1-40-40-0	0	COMATEL	
J4		94410049	CONNECT DIN 96Pts F	COUDE MALE		SOURIAU	
J5		94410049	CONNECT DIN 96Pts F	COUDE MALE		SOURIAU	
J6		94480021	CONNECT SUBD 9Pts M	ZEDE 111979-011	1	ITT	
L1		95400006	SELF	10µH 10X	1		
L2		95400006	SELF	10µH 10X	1		
L3		95400007	SELF	10µH 1A	1		
L4	1m	95450003	SELF REF:2129	22µH	1		
L5	1m	95450003	SELF REF:2129	22µH	1		
L8		95400006	SELF	10µH 10X	1		
L9		95400006	SELF	10µH 10X	1		
L10		95400007	SELF	10µH 1A	1		
OSC1		95010011	OSC CMOS +/- 100PPM	NCH080C-33MH3	1	SARONIX	
R7		95650012	RESEAU DE RESISTANCE	DIP 14 470 OHMS	1		
RR1		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		
RR2		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		
RR3	1s		RESEAU DE RESISTANCE	SIL 8/9 1K C104	0		
RR4		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		
RR5		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		
RR6		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		
RR7		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		
RR8	1s		RESEAU DE RESISTANCE	SIL 8/9 1K C104	0		
RR9		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		
RR10		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		
RR11		95650001	RESEAU DE RESISTANCE	SIL 8/9 10K C104	1		
RR12		95650025	RESEAU DE RESISTANCE	SIL 8/9 1K C104	1		
ST2		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.175	COMATEL	
ST01		95010012	QUARTZ HC18/U	12.5MHZ 89-01-1013	1	STI	
ST02		95010012	QUARTZ HC18/U	12.5MHZ 89-01-1013	1	STI	
SW1		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.075	COMATEL	
SW2		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.05	COMATEL	
SW6		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.05	COMATEL	
SW7		94563003	POUSSOIR	9233WWCD	1	APR	
SW8		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.05	COMATEL	
SW9		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.05	COMATEL	
SW11	1s	94450009	REPART MINI WRAP	385-0358-1-40-40-0	0	COMATEL	
SW12		94450009	REPART MINI WRAP	385-0358-1-40-40-0	0	COMATEL	
SW13	1s		REPART MINI WRAP	385-0358-1-40-40-0	0	COMATEL	
T1	6m	95400005	TRANSFO HF	76602/5	1	NEWPORT	
T3	6m	95400005	TRANSFO HF	76602/5	1	NEWPORT	
TP1		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP2		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP3		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP4		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP5		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP6		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP7		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP8		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP9		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP10		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP11		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	

MODIF.: IND. Xa=ajout - IND. Xmm=modif. ref. et/ou valeur - IND. Xs=suppression

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
TP12		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP13		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP14		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP15		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP16		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP17		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP18		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP19		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP20		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP21		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP22		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP23		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP24		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP25		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP26		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP27		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP28		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP29		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP30		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP31		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP32		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP33		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP34		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP35		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP36		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP37		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP38		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP39		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP40		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP41		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP42		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP43	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP44	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP45	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP46	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP47	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP48	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
U1		95360204	CIRCUIT INTEGRE	MAX233	1	MAXIM	DIP20
U2	1m	95300175	CIRCUIT INTEGRE	74F74SC	1	NATIONAL	SO14
U3	3m	95320002	CIRCUIT INTEGRE	27C256 120nS	1		DIP28
U3	3a	00010147	PROGRAMME	"MOPROM"	1		
U4		95300082	CIRCUIT INTEGRE	DSP56001-FC33	1	MOTOROLA	PQFP132
U5		95300092	CIRCUIT INTEGRE	PAL22V10H-10PC	1	ADVANCED	DIP24 Et
U5	3a	00010138	PROGRAMME	"MODECD02"	1		
U7	7m	95300090	CIRCUIT INTEGRE	71256-L35Y	1	IDT	SSOP28
U8	7m	95300090	CIRCUIT INTEGRE	71256-L35Y	1	IDT	SSOP28
U9	7m	95300090	CIRCUIT INTEGRE	71256-L35Y	1	IOT	SSOP28
U10		95300092	CIRCUIT INTEGRE	PAL22V10H-10PC	1	ADVANCED	DIP24 Et
U10	3a	00010137	PROGRAMME	"MODECD01"	1		
U11		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IDT	PLCC52
U14		95360161	CIRCUIT INTEGRE	MAX697	1	MAXIM	DIP16
U16	1m	95300131	CIRCUIT INTEGRE	74FCT244ASO	1	IDT	SO20L
U18		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IOT	PLCC52
U19		95300092	CIRCUIT INTEGRE	PAL22V10H-10PC	1	ADVANCED	DIP24 Et
U19	3a	00010140	PROGRAMME	"MOERR1"	1		
U23		95360204	CIRCUIT INTEGRE	PAL22V10G-25PC	1	ADVANCED	DIP24 Et
U23	3a	00010131	PROGRAMME	"SRQMAD"	1		
U24		95300093	CIRCUIT INTEGRE	PAL22V10H-15PC	1	ADVANCED	DIP24 Et
U24	3a	00010132	PROGRAMME	"PARMAD"	1		
U25		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IOT.	PLCC52
U28		95300093	CIRCUIT INTEGRE	PAL22V10H-15PC	1	ADVANCED	DIP24 Et
U28	3a	00010141	PROGRAMME	"MOERR2"	1		
U37		95300083	CIRCUIT INTEGRE	AM7968-125PC	1	AMD	DIP28
U39	1m	95300180	CIRCUIT INTEGRE	74F00SC	1	NATIONAL	SO14
U40		95360208	CIRCUIT INTEGRE	PAL22V10G-25PC	1	ADVANCED	DIP24 Et
U40	3a	00010142	PROGRAMME	"RSTMADO"	1		
U41	1m	95300097	CIRCUIT INTEGRE	XC3042-125PQ100C	1	XILINX	PQFP100
U42		95161075	CIRCUIT INTEGRE	5082-7730	1	HP	DIP14
U43	2m	95300108	CIRCUIT INTEGRE	PC 74HC123T	1	PHILIPS	SO16
U44		95300089	CIRCUIT INTEGRE	7134-LA35J	1	IDT	PLCC52
U45	4m	95300092	CIRCUIT INTEGRE	PC74HC151T	1	PHILIPS	SO16
U49		95300092	CIRCUIT INTEGRE	PAL22V10H-10PC	1	ADVANCED	DIP24 Et
U49	3a	00010139	PROGRAMME	"MODECD03"	1		
U51		94420255	BNC COUDE 75 OHMS	54-21-2031	1	STUDER	
U55		95300085	CIRCUIT INTEGRE	XC3042-100PQ100C	1	XILINX	PQFP100
U56	1m	95300085	CIRCUIT INTEGRE	XC3042-100PQ100C	1	XILINX	PQFP100
U62		95300096	CIRCUIT INTEGRE	XC1765-PO8C	1	XILINX	DIP8
U62	3a	00010143	PROGRAMME	"MOPRXIL1"	1		
U63	1m	95300179	CIRCUIT INTEGRE	74FCT833BSO	1	IOT	SO24L
U65		95300085	CIRCUIT INTEGRE	XC3042-100PQ100C	1	XILINX	PQFP100
U67	1m	95300179	CIRCUIT INTEGRE	74FCT833BSO	1	IDT	SO24L
U68		95300088	CIRCUIT INTEGRE	PAL16R4-7	1		DIP20
U68	3a	00010041	PROGRAMME	"SONRD"	1		
U70		95360202	CIRCUIT INTEGRE	PAL16R4-7	1		DIP20
U70	3a	00010042	PROGRAMME	"SONWR"	1		
U72		95360203	CIRCUIT INTEGRE	DS1000M-60	1		DIP8
U74		95300096	CIRCUIT INTEGRE	XC1765-PO8C	1	XILINX	DIP8

MODIF.: IND. Xa=ajout - IND. Xmm=modif. ref. et/ou valeur - IND. Xs=suppression

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
U74	3a	00010144	PROGRAMME	"MOPRXIL2"	1		
U75		95300096	CIRCUIT INTEGRE	XC1765-PO8C	1	XILINX	DIP8
U75	3a	00010145	PROGRAMME	"MOPRXIL3"	1		
U79		95360201	CIRCUIT INTEGRE	74AS250	1		DIP24 Et
U80	1m	95300179	CIRCUIT INTEGRE	74FCT833BSO	1	IOT	SO24L
U81	1m	95300179	CIRCUIT INTEGRE	74FCT833BSO	1	IDT	SO24L
U82	1m	95300179	CIRCUIT INTEGRE	74FCT833BSO	1	IDT	SO24L
U83		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IOT	PLCC52
U84		95300097	CIRCUIT INTEGRE	XC3042-125PQ100C	1	XILINX	PQFP100
U85		95300106	CIRCUIT INTEGRE	PC 74HC85T	1	PHILIPS	SO16
U88		95300085	CIRCUIT INTEGRE	XC3042-100PQ100C	1	XILINX	PQFP100
U90		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IOT	PLCC52
U97		95300106	CIRCUIT INTEGRE	PC 74HC85T	1	PHILIPS	SO16
U99		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IOT	PLCC52
U106		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IOT	PLCC52
U107		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IOT	PLCC52
U110		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IDT	PLCC52
U111	1a	95360114	CIRCUIT INTEGRE	74F08	1		DIP14
U112	2m	95360000	CIRCUIT INTEGRE	74LS244	1		DIP20
U127		95300083	CIRCUIT INTEGRE	AM7968-125PC	1	AMD	DIP28
U128		94420255	BNC COUDE 75 OHMS	54-21-2031	1	STUDER	
U137		95300089	CIRCUIT INTEGRE	7134-LA35J	1	IDT	PLCC52
U139		95300088	CIRCUIT INTEGRE	7130-LA35J	1	IDT	PLCC52
U142	4m	95300202	CIRCUIT INTEGRE	PC74HC151T	1	PHILIPS	SO16
USR1		94540008	ROUE CODEUSE	422055	1	HOPT-SHU	
X1		94480313	SUPPORT 24Pts ETROIT		8		
X2		94480305	SUPPORT 20Pts		2		
X3		94480301	SUPPORT 8Pts		3		
X4		94480303	SUPPORT 16Pts		1		
X5		94480308	SUPPORT 28Pts LARGE		1		
X6		94480034	SUPPORT 8Pts COUDE	(6 Pts UTILES)	1	ANTELEC	
X7		94336008	SUPPORT 14Pts COUDE		1	ANTELEC	
X8		94330007	SUPPORT LED		2	SHURTER	
X9		94320003	CAVALIER FEM. ISOLE	313-1731-0-00-406	7	COMATEL	
X10		98230043	POIGNEE EXTRACTEUR	HAUTE REF:131177	0.1	SEEM	
X11		98230044	POIGNEE EXTRACTEUR	BASSE REF: 131178	0.1	SEEM	
X12	1m	97613203	VIS	V106 F/92 M2,5 X 6	10		
X13		97612202	VIS	V126 M2,5 x 5	2		
X14	1m	97612205	VIS	V126 M2,5 x 8	9		
X15		97715007	RONDELLE	V151 MU 2,5	2		
X16		98230045	OEILLET + VIS	REF: 492959	0.02		
X17	1a	94480302	SUPPORT 14Pts		1		
X18	1a	94480023	VERROUILLAGE FEMELLE	8630-01-060	2	SOURIAU	
X19	1a	97880003	ENTRETOISE EXALIS 4	LONGUEUR 5mm	6	ACCEL	
X20	1a	97718000	ENTRETOISE LISSE	ø3 L1,5 ACIER	7		
X21	1a	97610011	ENTRETOISE ENMET 19	LONGUEUR 12	7	ACCEL	
X22	1a	97613213	VIS	F/90 M2,5x25	1		
X23	1a	97713006	ECROU	H2,5	1		
X24	3a	97110039	BOUCHE TROU METAL	7603	2	KEYSTONE	
SW3			PONT SOUDURE		1		
SW4			PONT SOUDURE		1		
SW5			PONT SOUDURE		1		
SW14			PONT SOUDURE		1		
SW15			PONT SOUDURE		1		
SW16			PONT SOUDURE		1		
SW17			PONT SOUDURE		1		
SW18			PONT SOUDURE		1		
U6			CIRCUIT INTEGRE	SN 74ABT16245OL	1	TEXAS	SSOP48
U12			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U13			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U15			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U17			CIRCUIT INTEGRE	SN 74ABT16245OL	1	TEXAS	SSOP48
U20			CIRCUIT INTEGRE	74FCT157ATSO	1	IOT	SO16
U21			CIRCUIT INTEGRE	74FCT652ATSO	1	IOT	SO24L
U22			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U26			CIRCUIT INTEGRE	SN 74ABT16245DL	1	TEXAS	SSOP48
U27			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U29			CIRCUIT INTEGRE	SN 74ABT16245OL	1	TEXAS	SSOP48
U30			CIRCUIT INTEGRE	74FCT652ATSO	1	IOT	SO24L
U31			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U32			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U33			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U34			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U35			CIRCUIT INTEGRE	SN 74ABT16244OL	1	TEXAS	SSOP48
U36			CIRCUIT INTEGRE	74FCT245ASO	1	IOT	SO20L
U53			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U54	1s		CIRCUIT INTEGRE	SN 74ABT16244DL	0	TEXAS	SSOP48
U60			CIRCUIT INTEGRE	74FCT157ATSO	1	IDT	SO16
U61			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U64			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U66			CIRCUIT INTEGRE	74FCT652ATSO	1	IDT	SO24L
U69			CIRCTUI INTEGRE	74FCT652ATSO	1	IDT	SO24L
U73			CIRCUIT INTEGRE	74FCT821BSO	1	IDT	SO24L
U77			CIRCUIT INTEGRE	74FCT821BSO	1	IDT	SO24L
U78			CIRCUIT INTEGRE	74FCT821BSO	1	IDT	SO24L
U86			CIRCUIT INTEGRE	74FCT652ATSO	1	IOT	SO24L

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
U87			CIRCUIT INTEGRE	SN 74ABT162440L	1	TEXAS	SSOP48
U92			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U93			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U94			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U95			CIRCUIT INTEGRE	74F280SC	1	NATIONAL	SO14
U100			CIRCUIT INTEGRE	SCAN 18374T SSC	1	NS	SSOP56
U101			CIRCUIT INTEGRE	74HCT157ATSO	1	IOT	SO16
U102			CIRCUIT INTEGRE	SCAN 18374T SSC	1	NS	SSOP56
U103			CIRCUIT INTEGRE	74HCT157ATSO	1	IDT	SO16
U104			CIRCUIT INTEGRE	SCAN 18374T SSC	1	NS	SSOP56
U105			CIRCUIT INTEGRE	74060	1	RTC	SO14
U108			CIRCUIT INTEGRE	SCAN 18374T SSC	1	NS	SSOP56
U113	1a		CIRCUIT INTEGRE	74F27	1		SO14
U114	1a		CIRCUIT INTEGRE	74F27	1		SO14
U152			CIRCUIT INTEGRE	74HCT157ATSO	1	IDT	SO16
U153			CIRCUIT INTEGRE	74HCT157ATSO	1	IOT	SO16
U206			CIRCUIT INTEGRE	SN 74ABT162450L	1	TEXAS	SSOP48
U207			CIRCUIT INTEGRE	SN 74ABT16245DL	1	TEXAS	SSOP48
C1	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C2	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C3	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C4	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C5	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C6	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C7	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C8	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C9	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C10	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C11			CONDENSATEUR	293G 47µF 10V	1		CASE D
C12	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C13	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C14			CONDENSATEUR	293G 47µF 10V	1		CASE D
C15	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C16	1m		CONDENSATEUR	2C1 47nF 20%	1		1206
C17			CONDENSATEUR	2C1 100nF 20%	1		1206
C18	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C19	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C20	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C21	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C22	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C23	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C24	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C25	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C26	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C27	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C28			CONDENSATEUR	2C1 1nF 20%	1		1206
C29	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C30	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C31	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C32	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C33	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C34	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C35	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C36	4m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C37	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C38			CONDENSATEUR	2C1 100nF 20%	1		1206
C39	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C40	4m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C41			CONDENSATEUR	595G 10µF 16V	1		CASE B
C42	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C43	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C44	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C45	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C46	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C47	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C49			CONDENSATEUR	2C1 100nF 20%	1		1206
C50	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C51	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C52	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C53			CONDENSATEUR	2C1 100nF 20%	1		1206
C54	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C55			CONDENSATEUR	2C1 1nF 20%	1		1206
C57	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C58			CONDENSATEUR	2C1 1nF 20%	1		1206
C59	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C60			CONDENSATEUR	595G 10µF 16V	1		CASE B
C61	4m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C62	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C63			CONDENSATEUR	2C1 1nF 20%	1		1206
C64	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C65	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C66			CONDENSATEUR	NPO 33pF 5%	1		1206
C67			CONDENSATEUR	NPO 33pF 5%	1		1206
C68			CONDENSATEUR	2C1 1nF 20%	1		1206
C70			CONDENSATEUR	2C1 47nF 20%	1		1206
C71	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206
C72	1m		CONDENSATEUR	2C1 10 nF 20%	1		1206

Optical Madisono 2 Madi Output Board   42.125.304.01
Coax Madisono 2 Madi Output Board   42.125.304.11

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR			QTE	FABRIQ.	BOITIER
C73	1m		CONDENSATEUR	2C1	1nF	20%	1		1206
C75	1m		CONDENSATEUR	2C1	47nF	20%	1		1206
C77	1m		CONDENSATEUR	2C1	1nF	20%	1		1206
C79	1m		CONDENSATEUR	2C1	47nF	20%	1		1206
C80	1m		CONDENSATEUR	2C1	1nF	20%	1		1206
C81	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C82	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C83	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C84	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C85	1m		CONDENSATEUR	2C1	33pF	20%	1		1206
C86	1m		CONDENSATEUR	2C1	33pF	20%	1		1206
C87	1m		CONDENSATEUR	2C1	33pF	20%	1		1206
C88	1m		CONDENSATEUR	2C1	33pF	20%	1		1206
C89	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C90	1m		CONDENSATEUR	2C1	47nF	20%	1		1206
C91	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C92	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C93	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C94	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C95	1m		CONDENSATEUR	2C1	33pF	20%	1		1206
C96	1m		CONDENSATEUR	2C1	33pF	20%	1		1206
C97	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C98	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C99	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C100			CONDENSATEUR	2C1	100nF	20%	1		1206
C107	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C111	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C114	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C140	1m		CONDENSATEUR	2C1	47nf	20%	1		1206
C141	1m		CONDENSATEUR	2C1	1nF	20%	1		1206
C143			CONDENSATEUR	2C1	100nF	20%	1		1206
C144			CONDENSATEUR	2C1	100nF	20%	1		1206
C145			CONDENSATEUR	2C1	100nF	20%	1		1206
C146			CONDENSATEUR	2C1	100nF	20%	1		1206
C147			CONDENSATEUR	2C1	1nF	20%	1		1206
C148			CONDENSATEUR	2C1	1nF	20%	1		1206
C149			CONDENSATEUR	2C1	1nF	20%	1		1206
C150	4m		CONDENSATEUR	595D	10μF	16V	1		CASE B
C152	1m		CONDENSATEUR	NPO	39PF	5%	1		1206
C153	1m		CONDENSATEUR	NPO	39PF	5%	1		1206
C154	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C155	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C156	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C157	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C158	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C159	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C160	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C161	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C162	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C163	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C164	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C165	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C166	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C167	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C168	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C169	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C170	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C171	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C172	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C173	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C174	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C175	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C176	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C177	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C178	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C179	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C180	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C181	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C182	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C183	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C184	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C185	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C186	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C187	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C188	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C189	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C190	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C191	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C192	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C193	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C194	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C195	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C196	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C197	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C198	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C199	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C200	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C201	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR			QTE	FABRIQ.	BOITIER
C202	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C203	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C204	1m		CONDENSATEUR	2C1	10 nF	20%	1		1206
C205	1m		CONDENSATEUR	293D	47μF	10V	1		CASE D
C206	1m		CONDENSATEUR	293D	47μF	10V	1		CASE D
C207	1m		CONDENSATEUR	293D	47μF	10V	1		CASE D
C210	1m		CONDENSATEUR	2C1	47nF	20%	1		1206
C211	1m		CONDENSATEUR	2C1	1nF	20%	1		1206
C212	1m		CONDENSATEUR	2C1	47nF	20%	1		1206
C213	1m		CONDENSATEUR	2C1	1nF	20%	1		1206
C214	1m		CONDENSATEUR	2C1	47nF	20%	1		1206
C215	1m		CONDENSATEUR	2C1	1nF	20%	1		1206
C216	1a		CONDENSATEUR	293D	47μF	10V	1		CASE D
C217	1a		CONDENSATEUR	293D	47μF	10V	1		CASE D
C218	1a		CONDENSATEUR	293D	47μF	10V	1		CASE D
C219	1a		CONDENSATEUR	293D	47μF	10V	1		CASE D
C220	1a		CONDENSATEUR	293D	47μF	10V	1		CASE D
C221	1a		CONDENSATEUR	293D	47μF	10V	1		CASE D

SCHEMATA / CIRCUIT DIAGRAMS

Sommation Summing Board   42.355.152.35

SECTION 5

STUDER

Sommation Summing Board   42.355.152.35

Sommation Summing Board   42.355.152.35

STUDER

Sommation Summing Board   42.355.152.35

Sommation Summing Board   42.355.152.35

BUS PARAM

DSP

BUS PARAM

RET SOMM

BUS SON

DATA BUS SON

SRQ

U120 GAL20V6 EN 20R4

ADSON[0:8]

DSON[00:31]

CE-R-SON
WR-R-SON
OE-R-SON

SOUS-ENSEMBLE / SUB-ASSEMBLY	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST : 87515235
CHASSIS OS-P	CONSOLE NUMERIQUE	FOLIO / SHEET : 5/6
DESIGNATION	STUDER	91216531
CARTE SOMMATION		

STUDER

Sommation Summing Board   42.355.152.35

SOUS-ENSEMBLE / SUB-ASSEMBLY	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST : 87513535
CHASSIS DS-P	CONSOLE NUMERIQUE	FOLIO / SHEET : 6/8
DESIGNATION		
CARTE SOMMATION	**STUDER**	91216531

EMISSION CONTRIBUTION SOMM

Sommation Summing Board   42.355.152.35

SOM

8.

RESET

9p
D
m

TEST

ERROR

SELECT

60p
f   IN

60p
m   OUT

Σ BUS

60p
f

Σ RETURN

RAIDISSEUR 91 316870 +6 EXALISA LONG-5 +6 VIS M2,5x16

GND

+5V

TELECHARGE
PROM

SECTION 5

STUDER

Sommation Summing Board 42.355.152.35

REPERE	IND	COMPOSANT	DESIGNATION	QTE	FABRIQUE
A1		91216531	SCHEMA	1	
A2		91216545	MYLAR DU CIRCUIT	1	
A3		30216545	TEST DE CONFORMITE	1	
A4		91216546	MYLAR DE SERIGRAPHIE	1	
A5		30216546	ECRAN DE SERIGRAPHIE	1	
A6		91216547	MYLAR EPARGNE SOUDURE	1	
A7		91114215	PLAN DE FABRICATION	1	
A8		30114215	OUTIL DE FABRICATION	1	
A9		91114274	PLAN DE MONTAGE	1	
A10		91122143	MODIF CABLAGE	1	
A11		91114189	FACE AVANT	1	
A12		30114189	OUTILLAGE	1	
A13		91216522	MYLAR OE SERIGRAPHIE FACE AVANT	1	
A14		30216522	OUTILLAGE	1	
A15		91216528	PLAN OE SERIGRAPHIE FACE AVANT /	1	
A16		98230043	POIGNEE-EXTRACTEUR HAUTE SEEM 131177	0.1	
A17		98230044	POIGNEE-EXTRACTEUR BASSE SEEM 131178	0.1	
A18		97613203	VIS V106 F/90 M2,5x6	2	
A19		97612202	VIS V126 M2,5x5	2	
A20		97612205	VIS V126 M2,5x8	2	
A21		97715007	RONDELLE V151 MU 2,5	2	
A22		91815561	MYLAR ETIQUETTE POIGNEE REPERE D3	1	
A23		30815561	OUTILLAGE	1	
A24		91815593	SERIGRAPHIE ETIQUETTE POIGNEE	1	
A25		98230045	OEILLET+VIS SEEM 492959	0.02	
A26		91815505	ETIQUETTE OE REPERAGE /	1	
C1		95555036	10nF-100V	1	
C2		95555036	10nF-100V	1	
C3		95555036	10nF-100V	1	
C4		95555036	10nF-100V	1	
C5		95555036	10nF-100V	1	
C6		95555036	10nF-100V	1	
C7		95555036	10nF-100V	1	
C8		95555036	10nF-100V	1	
C9		95555036	10nF-100V	1	
C10		95555036	10nF-100V	1	
C11		95555036	10nF-100V	1	
C12		95555036	10nF-100V	1	
C13		95555036	10nF-100V	1	
C14		95555036	10nF-100V	1	
C15		95555036	10nF-100V	1	
C16		95555036	10nF-100V	1	
C17		95555036	10nF-100V	1	
C18		95555036	10nF-100V	1	
C19		95555036	10nF-100V	1	
C20		95555036	10nF-100V	1	
C21		95555036	10nF-100V	1	
C22		95555073	100nF-100V	1	
C23		95555073	10nF-100V	1	
C24		95555036	10nF-100V	1	
C25		95555036	10nF-100V	1	
C26		95555036	10nF-100V	1	
C27		95555036	10nF-100V	1	
C28		95555036	10nF-100V	1	
C29		95555036	10nF-100V	1	
C30		95555036	10nF-100V	1	
C31		95562408	10uF-50V	1	
C32		95555073	100nF-100V	1	
C33		95555036	10nF-100V	1	
C34		95555036	10nF-100V	1	
C35		95555036	10nF-100V	1	
C36		95555036	10nF-100V	1	
C37		95555036	10nF-100V	1	
C38		95555036	10nF-100V	1	
C39		95555036	10nF-100V	1	
C40		95555073	100nF-100V	1	
C41		95555073	100nF-100V	1	
C42		95555073	100nF-100V	1	
C43		95555036	10nF-100V	1	
C44		95555036	10nF-100V	1	
C45		95555036	10nF-100V	1	
C46		95555036	10nF-100V	1	
C47		95555036	10nF-100V	1	
C48		95555036	10nF-100V	1	
C49		95555036	10nF-100V	1	
C50		95555036	10nF-100V	1	
C51		95555036	10nF-100V	1	
C52		95562408	10uF-50V	1	
C53		95555036	10nF-100V	1	

REPERE	IND	COMPOSANT	DESIGNATION	QTE	FABRIQUE
C54		95555036	10nF-100V	1	
C55		95555036	10nF-100V	1	
C56		95555036	10nF-100V	1	
C57		95555036	10nF-100V	1	
C58		95555036	10nF-100V	1	
C59		95555036	10nF-100V	1	
C60		95555036	10nF-100V	1	
C61		95555036	10nF-100V	1	
C62		95555036	10nF-100V	1	
C63		95555036	10nF-100V	1	
C64		95555036	10nF-100V	1	
C65		95555036	10nF-100V	1	
C66		95555036	10nF-100V	1	
C67		95555036	10nF-100V	1	
C68		95555036	10nF-100V	1	
C69		95555036	10nF-100V	1	
C70		95555036	10nF-100V	1	
C71		95555036	10nF-100V	1	
C72		95555036	10nF-100V	1	
C73		95555036	10nF-100V	1	
C74		95555036	10nF-100V	1	
C75		95555036	10nF-100V	1	
C76		95555036	10nF-100V	1	
C77		95555036	10nF-100V	1	
C78		95555036	10nF-100V	1	
C79		95555036	10nF-100V	1	
C80		95555036	10nF-100V	1	
C81		95555036	10nF-100V	1	
C82		95555036	10nF-100V	1	
C83		95555036	10nF-100V	1	
C84		95555036	10nF-100V	1	
C85		95555036	10nF-100V	1	
C86		95555036	10nF-100V	1	
C87		95555073	100nF-100V	1	
C88		95555073	100nF-100V	1	
C89		95555036	10nF-100V	1	
C90		95555036	10nF-100V	1	
C91		95555036	10nF-100V	1	
C92		95555036	10nF-100V	1	
C93		95555036	10nF-100V	1	
C94		95555036	10nF-100V	1	
C95		95555036	10nF-100V	1	
C96		95555036	10nF-100V	1	
C97		95555036	10nF-100V	1	
C98		95555073	100nF-100V	1	
C99		95555036	10nF-100V	1	
C100		95555036	10nF-100V	1	
C101		95555073	100nF-100V	1	
C102		95555073	100nF-100V	1	
C103		95555073	100nF-100V	1	
C104		95555036	10nF-100V	1	
C105		95555036	10nF-100V	1	
C106		95555036	10nF-100V	1	
C107		95555036	10nF-100V	1	
C108		95562420	100uF-25V	1	
C109		95555036	10nF-100V	1	
C110		95555036	10nF-100V	1	
C111		95555036	10nF-100V	1	
C112		95555036	10nF-100V	1	
C113		95555036	10nF-100V	1	
C114		95555073	100nF-100V	1	
C115		95555073	100nF-100V	1	
C116		95555036	10nF-100V	1	
C117		95555036	10nF-100V	1	
C118		95555036	10nF-100V	1	
C119		95555036	10nF-100V	1	
C120		95555073	100nF-100V	1	
C121		95555036	10nF-100V	1	
C122		95555036	10nF-100V	1	
C123		95555036	10nF-100V	1	
C124		95555036	10nF-100V	1	
C125		95555036	10nF-100V	1	
C126		95555036	10nF-100V	1	
C127		95555036	10nF-100V	1	
C128		95555036	10nF-100V	1	
C129		95555036	10nF-100V	1	
C130		95555036	10nF-100V	1	
C131		95555036	10nF-100V	1	
C132		95555036	10nF-100V	1	

REPERE	IND	COMPOSANT	DESIGNATION	QTE	FABRIQUE
C133		95555073	100nF-100V	1	
C134		95555036	10nF-100V	1	
CR..		94330007	SUPPORT AST 0035-9660 SHURTER	5	
D1		95163000	LED\FAV HLMP-1700 ROUGE	1	
D2		95163002	LED\FAV HLMP-1790 VERT	1	
D3		95163002	LED\FAV HLMP-1790 VERT	1	
D4		95163002	LED\FAV HLMP-1790 VERT	1	
D5		95163002	LED\FAV HLMP-1790 VERT	1	
J1		94410049	CONNECTEUR 8609-396-71-13-755-000-E1 SOU	1	
J2		94410049	CONNECTEUR 8609-396-71-13-755-000-E1 SOU	1	
J3		94410049	CONNECTEUR 8609-396-71-13-755-000-E1 SOU	1	
J4		94450009	REPARTITEUR W 6C COMATEL (40PTS)	0.15	
OSC1	1	95010005	OSCILLATEUR 20,5MHz HCMOS TYPE 1129	1	NDK
P1		94420150	CON\SUBD\HD\60\F YAMAICHI NBS060-1200-01	1	
P2		94420149	CON\SUBD\HD\60\M YAMAICHI NBP060-1200-01	1	
P3		94420150	CON\SUBD\HD\60\F YAMAICHI NBS060-1200-01	1	
P4		94480021	CONNECTEUR ZEDE 111979-011	1	
R1		95619783	C109 9,76K	1	
R2		95619753	C109 4,75K	1	
R3		95612137	C103 3,9K	1	
R4		95656001	RESEAU RESISTIF 470 OHMS SIL 8.4	1	SFERNICE
R5		95656001	RESEAU RESISTIF 470 OHMS SIL 8.4	1	SFERNICE
R6		95650013	SIL8.4 68 OHMS	1	
R7		95612147	C103 10K	1	
R8		95612137	C103 3,9K	1	
R9		95650013	SIL8.4 68 OHMS	1	
R10		95612137	C103 3,3K	1	
R11		95650031	SIL9.8 10K	1	
R12		95612137	C103 3,9K	1	
R13		95612137	C103 3,9K	1	
R14		95612137	C103 3,9K	1	
R15		95650013	SIL8.4 68 OHMS	1	
R16		95650013	SIL8.4 68 OHMS	1	
R17		95612147	C103 10K	1	
R18		95612147	C103 10K	1	
R19		95650013	SIL8.4 68 OHMS	1	
R20		95650013	SIL8.4 68 OHMS	1	
R21		95650013	SIL8.4 68 OHMS	1	
R22		95650013	SIL8.4 68 OHMS	1	
R23		95650031	SIL9.8 10K	1	
R24		95612137	C103 3,9K	1	
R25		95650031	SIL9.8 10K	1	
R26		95612137	C103 3,9K	1	
R27		95612147	C103 10K	1	
R28		95612137	C103 3,9K	1	
R29		95650013	SIL8.4 68 OHMS	1	
R30		95650013	SIL8.4 68 OHMS	1	
R31		95650013	SIL8.4 68 OHMS	1	
R32		95650013	SIL8.4 68 OHMS	1	
R33		95650013	SIL8.4 68 OHMS	1	
R34		95650013	SIL8.4 68 OHMS	1	
R35		95650013	SIL8.4 68 OHMS	1	
R36		95650013	SIL8.4 68 OHMS	1	
R37		95650031	SIL9.8 10K	1	
R38		95650013	C103 10K	1	
RF1		94540008	422055		
S1		94450009	REPARTITEUR W 3C COMATEL (40PTS)	0.08	
SW1		94563003	BOUTON POUSSOIR APR 9233WWCD	1	
U1		95161075	5082-7730	1	
U2		95360212	L4C381	1	
U3		95360161	MAX697	1	
U4		95360175	74FCT244	1	
U5		95360204	MAX233	1	
U6		95332032	7407	1	
U7		95340011	74HCT74	1	
U8		95360177	74FCT374	1	
U9		95360177	74FCT374	1	
U10		95360083	XC1736	1	
U10		00010058	PROGRAMME "CRET"	1	
U11		95340009	74FCT833A-P	1	
U12		95363023	74HC85	1	
U13		95360196	74FCT191	1	
U14		95360227	74HCT283	1	
U15		95366001	74LS47	1	
U16		95343078	26LS32	1	
U17		95360020	74HCT244	1	
U18		95360177	74FCT374	1	
U19		95360175	74FCT244	1	
U20		95360177	74FCT374	1	

REPERE	IND	COMPOSANT	DESIGNATION	QTE	FABRIQUE
U21		95340009	74FCT833A-P	1	
U22		95340009	74FCT833A-P	1	
U23		95360084	XC201B-PLCC	1	
U24		95360212	L4C381	1	
U25		95343078	26LS32	1	
U26		95360043	75157	1	
U27		95340009	74FCT833A-P	1	
U28		95360024	74HC04	1	
U29		95390006	PAL20X10ACNS	1	
U29		00010048	PROGRAMME "COMPTEUR"	1	
U30		95360203	DS1000M-60	1	
U31		95360196	74FCT191	1	
U32	2	95363023	74HC85	1	
U33		95343078	26LS32	1	
U34		95343078	26LS32	1	
U35		95360175	74FCT244	1	
U36		95360177	74FCT374	1	
U37		95360177	74FCT374	1	
U38		95340009	74FCT833A-P	1	
U39		95340009	74FCT833A-P	1	
U40		95360159	7130 L-35-P	1	
U41		95360159	7130 L-35-P ,	1	
U42		95360159	7130 L-35-P	1	
U43		95360202	PAL16R4-7	1	
U43		00010042	PROGRAMME "SONWR"	1	
U44		95360021	74HCT123	1	
U45		95360199	74FB21B-P	1	
U46		95360199	74FB21B-P	1	
U47		95343078	26LS32	1	
U48		95343078	26LS32	1	
U49		95360175	74FCT244	1	
U50		95360177	74FCT374	1	
U51		95360175	74FCT244	1	
U52		95360192	74FCT652	1	
U53		95360202	PAL16R4-7	1	
U53		00010041	PROGRAMME "SONRD"	1	
U54		95360199	74FB21B-P	1	
U55		95360199	74FB21B-P	1	
U56		95360111	26LS31	1	
U57		95343078	26LS32	1	
U58		95360175	74FCT244	1	
U59		95360177	74FCT374	1	
U60		95360177	74FCT374	1	
U61		95390006	PAL20X10ACNS	1	
U61		00010048	PROGRAMME "COMPTEUR"	1	
U62		95360207	7164 L-45-TP	1	
U63		95360192	74FCT652	1	
U64		95363023	74HC85	1	
U65		95360199	74FB21B-P	1	
U66		95360111	26LS31	1	
U67		95360111	26LS31	1	
U68		95340011	74HCT74	1	
U69		95360134	74HCT20	1	
U70		95360189	74FCT245	1	
U71		95360189	74FCT245	1	
U72		95360226	74F845	1	
U73		95360200	74FCT833B-P	1	
U74		95360020	74HCT244	1	
U75		95360111	26LS31	1	
U76		95360111	26LS31	1	
U77		95360175	74FCT244	1	
U78		95360177	74FCT374	1	
U79		95340009	74FCT833A-P	1	
U80		95360054	74HCT04	1	
U81		95360189	74FCT245	1	
U82		95360190	74F00	1	
U83		95390001	PAL16L8D	1	
U83		00010035	PROGRAMME "DSP31"	1	
U84		95360216	DSP56001RC20 (20,5 MHz)	1	
U85		95360207	7164 L-45-TP	1	
U86		95360201	74AS250	1	
U87		95360192	74FCT652	1	
U88		95360192	74FCT652	1	
U89		95360111	26LS31	1	
U90		95360111	26LS31	1	
U91		95360175	74FCT244	1	
U92		95360177	74FCT374	1	
U93		95340009	74FCT833A-P	1	
U94		95360189	74FCT245	1	

Sommation Summing Board   42.355.152.35

```
|-------------------------------------------------------|--------|
|REPERE    |IND|COMPOSANT|DESIGNATION                    |QTE |FABRIQUE|
|--------+---+--------+---------------------------------+----+--------|
|U95      |   |95360200 |74FCT833B-P                     |1  |        |
|U96      |   |95360195 |PAL20R4B                        |1  |        |
|U96      |   |00010043 |PROGRAMME "PARPAP"              |1  |        |
|U97      |   |95360200 |74FCT833B-P                     |1  |        |
|U98      |   |95340009 |74FCT833A-P                     |1  |        |
|U99      |   |95360111 |26LS31                          |1  |        |
|U100     |   |95343078 |26LS32                          |1  |        |
|U101     |   |95343078 |26LS32                          |1  |        |
|U102     |   |95343078 |26LS32                          |1  |        |
|U103     |   |95360043 |75157                           |1  |        |
|U104     |   |95343078 |26LS32                          |1  |        |
|U105     |   |95343078 |26LS32                          |1  |        |
|U106     |   |95360175 |74FCT244                        |1  |        |
|U107     |   |95360198 |7130 L-25-P                     |1  |        |
|U108     |   |95360192 |74FCT652                        |1  |        |
|U109     |   |95360198 |7130 L-25-P                     |1  |        |
|U110     |   |95360175 |74FCT244                        |1  |        |
|U111     |   |95360198 |7130 L-25-P                     |1  |        |
|U112     |   |95360192 |74FCT652                        |1  |        |
|U113     |   |95360207 |7164 L-45-TP                    |1  |        |
|U114     |   |95363023 |74HC85                          |1  |        |
|U115     |   |95360114 |74F08                           |1  |        |
|U116     |   |95360175 |74FCT244                        |1  |        |
|U117     |   |95332031 |7406                            |1  |        |
|U118     |   |95340009 |74FCT833A-P                     |1  |        |
|U119     |   |95360205 |27C256-25-P                     |1  |        |
|U120     |   |95360191 |GAL20V8-35Q                     |1  |        |
|U120     |   |00010044 |PROGRAMME "SRQ" (EN 20R4)       |1  |        |
|U121     |   |95343078 |26LS32                          |1  |        |
|U122     |   |95343078 |26LS32                          |1  |        |
|U123     |   |95360177 |74FCT374                        |1  |        |
|U124     |   |95360189 |74FCT245                        |1  |        |
|U125     |   |95363035 |74F74                           |1  |        |
|U126     |   |95360175 |74FCT244                        |1  |        |
|U127     |   |95360175 |74FCT244                        |1  |        |
|Z1       |   |94320003 |CAVALIER COMATEL                |1  |        |
|Z10      |   |94480308 |SUPPORT CINT 28C LARGE          |1  |        |
|Z13      |   |97880003 |ENTRETOISE EXALIS4 LONG:5 ACCEL |6  |        |
|Z14      |   |97612209 |VIS V126 CBL M2,5x16            |6  |        |
|Z15      |   |94480023 |VERROUILLAGE SOURIAU 8630-01-060|8  |        |
|Z16      |   |94480018 |SUPPORT PGA-068-CH3-S-TG ROBINSON|2  |        |
|Z17      |   |94480019 |SUPPORT PGA-088-CH3-S-TG ROBINSON|1  |        |
|Z18      |   |94480318 |SUPPORT PLCC 84C SCC84T ANTELEC |1  |        |
|Z19      |   |91316870 |RAIDISSEUR CARTE 9U             |1  |        |
|Z2       |   |94480301 |SUPPORT CINT  8C                |4  |        |
|Z3       |   |94480304 |SUPPORT CINT 14C COUDE          |1  |        |
|Z4       |   |94480302 |SUPPORT CINT 14C                |12 |        |
|Z5       |   |94480303 |SUPPORT CINT 16C                |31 |        |
|Z6       |   |94480305 |SUPPORT CINT 20C                |39 |        |
|Z7       |   |94480313 |SUPPORT CINT 24C                |27 |        |
|Z8       |   |94480316 |SUPPORT CINT 28C ETROIT         |3  |        |
|Z9       |   |94480311 |SUPPORT CINT 48C                |7  |        |
|-------------------------------------------------------|--------|
```

SCHEMATA / CIRCUIT DIAGRAMS

Pap Plus Board Extended Memory   42.355.278.89

| DESIGNATION | ENSEMBLE / ASSEMBLY | NRE / COMPONENTS LIST 89.328879 | |
| CELLULES TRAIT Nos1&2 | CARTE PAPPLUS | FOLIO / SHEET   1/12 | |

STUDER   91 328494

STUDER

Pap Plus Board Extended Memory 42.355.278.89

CELLULES TRAIT Nos3&4 — CAPTE PAPPLUS — FOLIO / SHEET · 2/12

STUDER 91 328494

STUDER

Pap Plus Board Extended Memory   42.355.278.89

STUDER

Pap Plus Board Extended Memory   42.355.278.89

DESIGNATION	ENSEMBLE / ASSEMBLY	NPE / COMPONENTS LIST 89 329979
CELLULES TRAIT. Nos7&8	CARTE PAPPLUS	FOLIO / SHEET 4/12

STUDER | 91 328494

Pap Plus Board Extended Memory   42.355.278.89

| DESIGNATION | ENSEMBLE / ASSEMBLY | NRE / COMPONENTS LIST 88.527879 |
| CELLULE CONTROLE No9 | CARTE PAPPLUS | FOLIO / SHEET 5/12 |

STUDER   91 328494

STUDER

Pap Plus Board Extended Memory   42.355.278.89

Pap Plus Board Extended Memory   42.355.278.89

STUDER

Pap Plus Board Extended Memory 42.355.278.89

BUS SON

DESIGNATION	ENSEMBLE / ASSEMBLY	WE / COMPONENTS LIST 80 327070
INTERFACE BLS SON	CARTE PAPPLUS	FOLIO / SHEET 8/12

STUDER   91 328494

Pap Plus Board Extended Memory   42.355.278.89

Pap Plus Board Extended Memory   42.355.278.89

INTERFACE BUS DEBUG

GESTION D' INTERFACE BUS PARAMETRE

ADAPTATION EN FIN DE LIGNE

DESIGNATION	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST 98 327879
INTERFACE BUS PARAM	CARTE PAPPLUS	FOLIO / SHEET 10/12

STUDER   91 328494

STUDER

Pap Plus Board Extended Memory 42.355.278.89

CONNECTEUR SUPERIEUR

RANGEE A		RANGEE B		RANGEE C	
J22-A1	SOMIN31	J22-B1	MGND	J22-C1	SOMOUT31
J22-A2	SOMIN30	J22-B2	—	J22-C2	SOMOUT30
J22-A3	SOMIN29	J22-B3	—	J22-C3	SOMOUT29
J22-A4	SOMIN28	J22-B4	—	J22-C4	SOMOUT28
J22-A5	SOMIN27	J22-B5	—	J22-C5	SOMOUT27
J22-A6	SOMIN26	J22-B6	GND	J22-C6	SOMOUT26
J22-A7	SOMIN25	J22-B7	+5V	J22-C7	SOMOUT25
J22-A8	SOMIN24	J22-B8	AOSLOT3	J22-C8	SOMOUT24
J22-A9	SOMIN23	J22-B9	AOSLOT2	J22-C9	SOMOUT23
J22-A10	SOMIN22	J22-B10	AOSLOT1	J22-C10	SOMOUT22
J22-A11	SOMIN21	J22-B11	AOSLOT0	J22-C11	SOMOUT21
J22-A12	SOMIN20	J22-B12	GND	J22-C12	SOMOUT20
J22-A13	SOMIN19	J22-B13	PRESIN	J22-C13	SOMOUT19
J22-A14	SOMIN18	J22-B14	GND	J22-C14	SOMOUT18
J22-A15	SOMIN17	J22-B15	GND	J22-C15	SOMOUT17
J22-A16	SOMIN16	J22-B16	—	J22-C16	SOMOUT16
J22-A17	SOMIN15	J22-B17	—	J22-C17	SOMOUT15
J22-A18	SOMIN14	J22-B18	—	J22-C18	SOMOUT14
J22-A19	SOMIN13	J22-B19	—	J22-C19	SOMOUT13
J22-A20	SOMIN12	J22-B20	—	J22-C20	SOMOUT12
J22-A21	SOMIN11	J22-B21	—	J22-C21	SOMOUT11
J22-A22	SOMIN10	J22-B22	—	J22-C22	SOMOUT10
J22-A23	SOMIN09	J22-B23	—	J22-C23	SOMOUT09
J22-A24	SOMIN08	J22-B24	—	J22-C24	SOMOUT08
J22-A25	SOMIN07	J22-B25	—	J22-C25	SOMOUT07
J22-A26	SOMIN06	J22-B26	—	J22-C26	SOMOUT06
J22-A27	SOMIN05	J22-B27	—	J22-C27	SOMOUT05
J22-A28	SOMIN04	J22-B28	—	J22-C28	SOMOUT04
J22-A29	SOMIN03	J22-B29	—	J22-C29	SOMOUT03
J22-A30	SOMIN02	J22-B30	—	J22-C30	SOMOUT02
J22-A31	SOMIN01	J22-B31	—	J22-C31	SOMOUT01
J22-A32	SOMIN00	J22-B32	MGND	J22-C32	SOMOUT00

CONNECTEUR MILIEU

RANGEE A		RANGEE B		RANGEE C	
J23-A1	AOR0	J23-B1	ADR1	J23-C1	ADR2
J23-A2	AOR3	J23-B2	ADR4	J23-C2	AOR5
J23-A3	AOR6	J23-B3	ACW5	J23-C3	AOW6
J23-A4	AOW0	J23-B4	—	J23-C4	TRSF
J23-A5	AOW1	J23-B5	—	J23-C5	SEW00
J23-A6	AOW2	J23-B6	—	J23-C6	SEW01
J23-A7	AOW3	J23-B7	—	J23-C7	SEW02
J23-A8	AOW4	J23-B8	—	J23-C8	SEW03
J23-A9	GND	J23-B9	—	J23-C9	GND
J23-A10	—	J23-B10	—	J23-C10	SD00
J23-A11	GND	J23-B11	—	J23-C11	SD01
J23-A12	SEW12	J23-B12	SEW04	J23-C12	SD02
J23-A13	SEW13	J23-B13	SEW05	J23-C13	SD03
J23-A14	SEW14	J23-B14	SEW06	J23-C14	SD04
J23-A15	GND	J23-B15	SEW07	J23-C15	SD05
J23-A16	SEW15	J23-B16	SEW08	J23-C16	SD06
J23-A17	GND	J23-B17	SEW09	J23-C17	SD07
J23-A18	SER0	J23-B18	SEW10	J23-C18	SD08
J23-A19	GND	J23-B19	SEW11	J23-C19	SD09
J23-A20	SER1	J23-B20	GND	J23-C20	SD10
J23-A21	—	J23-B21	SER2	J23-C21	SD11
J23-A22	—	J23-B22	SER3	J23-C22	SD12
J23-A23	—	J23-B23	GND	J23-C23	SD13
J23-A24	—	J23-B24	SD21	J23-C24	SD14
J23-A25	—	J23-B25	SD22	J23-C25	SD15
J23-A26	—	J23-B26	SD23	J23-C26	SD16
J23-A27	OP0	J23-B27	—	J23-C27	SD17
J23-A28	OP1	J23-B28	—	J23-C28	SD18
J23-A29	OP2	J23-B29	—	J23-C29	SD19
J23-A30	—	J23-B30	—	J23-C30	SD20
J23-A31	—	J23-B31	—	J23-C31	—
J23-A32	+5V	J23-B32	+5V	J23-C32	+5V

CONNECTEUR INFERIEUR

RANGEE A		RANGEE B		RANGEE C	
J24-A1	—	J24-B1	—	J24-C1	BHOST0
J24-A2	—	J24-B2	—	J24-C2	BHOST1
J24-A3	—	J24-B3	—	J24-C3	BHOST2
J24-A4	—	J24-B4	—	J24-C4	BHOST3
J24-A5	—	J24-B5	—	J24-C5	BHOST4
J24-A6	—	J24-B6	—	J24-C6	BHOST5
J24-A7	—	J24-B7	—	J24-C7	BHOST6
J24-A8	—	J24-B8	—	J24-C8	BHOST7
J24-A9	GND	J24-B9	—	J24-C9	GND
J24-A10	BFE	J24-B10	—	J24-C10	—
J24-A11	GND	J24-B11	—	J24-C11	HOSTPAR
J24-A12	BHT2	J24-B12	—	J24-C12	HOSTAD0
J24-A13	—	J24-B13	—	J24-C13	HOSTAD1
J24-A14	BHT1	J24-B14	—	J24-C14	HOSTAD2
J24-A15	GND	J24-B15	—	J24-C15	HOSTR
J24-A16	BHMT	J24-B16	—	J24-C16	HOSTACK
J24-A17	GND	J24-B17	—	J24-C17	HOSTEN
J24-A18	—	J24-B18	—	J24-C18	HOSTSEL
J24-A19	GND	J24-B19	—	J24-C19	HOSTREQ
J24-A20	BFM	J24-B20	GND	J24-C20	—
J24-A21	—	J24-B21	—	J24-C21	HSR0
J24-A22	—	J24-B22	—	J24-C22	SR0
J24-A23	—	J24-B23	GND	J24-C23	—
J24-A24	BFCLK	J24-B24	—	J24-C24	BTRIGGER
J24-A25	—	J24-B25	—	J24-C25	—
J24-A26	BRESET	J24-B26	—	J24-C26	ADSR03
J24-A27	—	J24-B27	—	J24-C27	ADSR02
J24-A28	—	J24-B28	—	J24-C28	ADSR01
J24-A29	—	J24-B29	—	J24-C29	ADSR00
J24-A30	—	J24-B30	—	J24-C30	—
J24-A31	MGND	J24-B31	—	J24-C31	MGND
J24-A32	+5V	J24-B32	+5V	J24-C32	+5V

Capacitors: C237 47µF, C238 47µF, C239 47µF, C240 47µF, C241 47µF, C242 47µF

Test points: TP49, TP50, TP51, TP52, TP53

DESIGNATION	ENSEMBLE / ASSEMBLY	NRE / COMPONENTS LIST ER 527579
CONNECTEURS	CARTE PAPPLUS	FOLIO / SHEET 11/12

STUDER 91 328494

SECTION 6

STUDER

Pap Plus Board Extended Memory   42.355.278.89

Pap Plus Board Extended Memory   42.355.278.89

STUDER

Pap Plus Board Extended Memory   42.355.278.89

STUDER

Pap Plus Board Extended Memory   42.355.278.89

MODIF.: IND. Xa=ajout · IND. Xm=modif. ref. et/ou valeur · IND. Xs=suppression

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
A1		91328494	SCHEMA		1		
A2		91224166	FILM CIRCUIT		1		
A3		30224166	TEST DE CONFORMITE		1		
A4		91224167	FILM DE SERIGRAPHIE		1		
A5		91224168	FILM EPARGNE SOUDURE		1		
A6		91224169	FILM PATE A BRASER		1		
A7		30224169	ECRAN PATE A BRASER		1		
A8		91122597	PLAN DE FABRICATION		1		
A9		30122597	OUTIL DE FABRICATION		1		
A10		91122598	USINAGE FACE AVANT		1		
A11		91224170	FILM SERIGRAPHIE FACE AVANT		1		
A12		91224171	PLAN DE SERIGRAPHIE FACE AVANT		1		
A13		30224171	OUTIL DE SERIGRAPHIE FACE AVANT		1		
A14		91815561	MYLAR ETIQUETTE POIGNEE REPERE D11		1		
A15		91830850	PLAN DE SERIGRAPHIE ETIQ. POIGNEE		1		
A16		30830850	OUTIL DE SERIGRAPHIE POIGNEE		1		
A17		91815505	ETIQUETTE REPERE CONNECTEUR		1		
A18		91316870	RAIDISSEUR		1		
A19		91122599	PLAN D'EQUIPEMENT		1		
A20		91815597	VIS CBL M2,5x14		6		
C1		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C2		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C3		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C4		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C5		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C6		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C7		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C8		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C9		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C10		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C11		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C12		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C13		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C14		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C15		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C16		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C17		95500024	CONDENSATEUR	293D 47µF 10% 10V	1	SPRAGUE	CASE D
C18		95500024	CONDENSATEUR	293D 47µF 10% 10V	1	SPRAGUE	CASE D
C19		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C20		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C21		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C22		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C23		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C24		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C25		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C26		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C27		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C28		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C29		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C30		95500023	CONDENSATEUR	CNC2 1µF 10% 16V	1	SPRAGUE	CASE A
C31		95500023	CONDENSATEUR	CNC2 1µF 10% 16V	1	SPRAGUE	CASE A
C32		95500023	CONDENSATEUR	CNC2 1µF 10% 16V	1	SPRAGUE	CASE A
C33		95500023	CONDENSATEUR	CNC2 1µF 10% 16V	1	SPRAGUE	CASE A
C34		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C35		95500023	CONDENSATEUR	CNC2 1µF 10% 16V	1	SPRAGUE	CASE A
C36		95500022	CONDENSATEUR	CNC2 820pF 10%	1		0805
C37		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C38		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C39		95500022	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C40		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C41		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C42		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C43		95500021	CONDENSATEUR	CNC2 820pF 20% 25V	1		0805
C44		95500021	CONDENSATEUR	CNC2 820pF 20% 25V	1		0805
C45		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C46		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C47		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C48		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C49		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C50		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C51		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C52		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C53		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C54		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C55		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C56		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C57		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C58		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C59		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C60		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C61		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C62		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C63		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C64		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C65		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C66		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805

MODIF.: IND. Xa=ajout · IND. Xm=modif. ref. et/ou valeur · IND. Xs=suppression

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
C67		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C68		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C69		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C70		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C71		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C72		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C73		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C74		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C75		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C76		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C77		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C78		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C79		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C80		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C81		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C82		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C83		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C84		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C85		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C86		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C87		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C88		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C89		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C90		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C91		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C92		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C93		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C94		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C95		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C96		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C97		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C98		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C99		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C100		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C101		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C102		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C103		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C104		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C105		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C106		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C107		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C108		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C109		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C110		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C111		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C112		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C113		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C114		95500021	CONDENSATEUR	CNC2 820pF 10% 63V	1		0805
C115		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C116		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C117		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C118		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C119		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C120		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C121		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C122		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C123		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C124		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C125		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C126		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C127		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C128		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C129		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C130		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C131		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C132		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C133		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C134		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C135		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C136		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C137		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C138		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C139		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C140		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C141		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C142		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C143		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C144		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C145		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C146		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C147		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C148		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C149		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C150		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C151		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805
C152		95500022	CONDENSATEUR	CNC2 100nF 20% 25V	1		0805

Pap Plus Board Extended Memory 42.355.278.89

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR			QTE	FABRIQ.	BOITIER
C153		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C154		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C155		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C156		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C157		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C158		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C159		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C160		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C161		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C162		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C163		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C164		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C165		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C166		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C167		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C168		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C169		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C170		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C171		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C172		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C173		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C174		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C175		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C176		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C177		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C178		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C179		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C180		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C181		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C182		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C183		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C184		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C185		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C186		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C187		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C188		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C189		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C190		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C191		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C192		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C193		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C194		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C195		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C196		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C197		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C198		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C199		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C200		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C201		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C202		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C203		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C204		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C205		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C206		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C207		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C208		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C209		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C210		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C211		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C212		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C213		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C214		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C215		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C216		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C217		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C218		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C219		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C220		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C221		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C224		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C225		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C226		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C227		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C228		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C229		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C230		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C231		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C232		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C233		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C234		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C235		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C236		95500022	CONDENSATEUR	CNC2	100nF	20% 25V	1		0805
C237	1a	95500024	CONDENSATEUR	293D	47µF	10% 10V	1	SPRAGUE	CASE D
C238	1a	95500024	CONDENSATEUR	293D	47µF	10% 10V	1	SPRAGUE	CASE D
C239	1a	95500024	CONDENSATEUR	293D	47µF	10% 10V	1	SPRAGUE	CASE D
C240	1a	95500024	CONDENSATEUR	293D	47µF	10% 10V	1	SPRAGUE	CASE D
C241	1a	95500024	CONDENSATEUR	293D	47µF	10% 10V	1	SPRAGUE	CASE D
C242	1a	95500024	CONDENSATEUR	293D	47µF	10% 10V	1	SPRAGUE	CASE D

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
D1		95163002	LED VERT	HLMP-1790	1	HEWLETT	
D2		95163000	LED ROUGE	HLMP-1700	1	HEWLETT	
D3		95163002	LED DIA:1,8 ROUGE	LTL709R (223945)	1	ORBITEC	
D4		95222854	DIODE S104	1N4448	1		
J1	3s	94426068	CONNECT HE10 DROIT	PROFIL REDUIT	0		
J2	1m	94420266	CONNECT SIMM 72	87 734	1	ASCOME	
J3	3s	94426068	CONNECT HE10 DROIT	PROFIL REDUIT	0		
J4	1m	94420266	CONNECT SIMM 72	87 734	1	ASCOME	
J5	3s	94426068	CONNECT HE10 DROIT	PROFIL REDUIT	0		
J6	1m	94420266	CONNECT SIMM 72	87 734	1	ASCOME	
J7	3s	94426068	CONNECT HE10 DROIT	PROFIL REDUIT	0		
J8	1m	94420266	CONNECT SIMM 72	87 734	1	ASCOME	
J9	3s	94426068	CONNECT HE10 DROIT	PROFIL REDUIT	0		
J10	1m	94420266	CONNECT SIMM 72	87 734	1	ASCOME	
J11	3s	94426068	CONNECT HE10 DROIT	PROFIL REDUIT	0		
J12	1m	94420266	CONNECT SIMM 72	87 734	1	ASCOME	
J13	3s	94426068	CONNECT HE10 DROIT	PROFIL REDUIT	0		
J14	1m	94420266	CONNECT SIMM 72	87 734	1	ASCOME	
J15	3s	94426068	CONNECT HE10 DROIT	PROFIL REDUIT	0		
J16	1m	94420266	CONNECT SIMM 72	87 734	1	ASCOME	
J17	3s	94426068	CONNECT HE10 DROIT	PROFIL REDUIT	0		
J18	1m	94420266	CONNECT SIMM 72	87 734	1	ASCOME	
J19	3s	94426068	CONNECT HE10 DROIT	PROFIL REDUIT	0		
J20	1m	94420266	CONNECT SIMM 72	87 734	1	ASCOME	
J21	3s	94426068	CONNECT HE10 DROIT	PROFIL REDUIT	0		
J22		94410049	CONNECT DIN 96Pts	COUDE MALE	1		
J23		94410049	CONNECT DIN 96Pts	COUDE MALE	1		
J24		94410049	CONNECT DIN 96Pts	COUDE MALE	1		
J25		94480021	CONNECT SUBD 9Pts M	ZEDE 111979-011	1	ITT	
J26		94480022	CONNECT SUBD 15Pts F	ZEDA 111978-111	1	ITT	
J27		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.125	COMATEL	
L1		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L2		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L3		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L4		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L5		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L6		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L7		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L8		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L9		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L10		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L11		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L12		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L13		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L14		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L15		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L16		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L17		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
L18		95400012	SELF 22µH 10%	CM453232-220K	1	SECRE	1812
OSC1		95010013	OSCILLATEUR	NCH080C/20MHz	1	SARONIX	DIP14
OSC2		95010022	OSCILLATEUR	NCH080C/13MHz	1	SARONIX	DIP14
R1		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R2		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R3		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R4		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R5		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R6		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R7		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R8		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R9		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R10		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R11		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R12		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R13		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R14		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R15		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R16		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R17		95610013	RESISTANCE	1 KOHMS 5% 1/8W	1		0805
R18		95610013	RESISTANCE	1 KOHMS 5% 1/8W	1		0805
R19		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R20		95610018	RESISTANCE	1,5 KOHMS 5% 1/8W	1		0805
R21		95610018	RESISTANCE	1,5 KOHMS 5% 1/8W	1		0805
R22		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R23		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R24		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R25		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R26		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R27		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R28		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R29		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R30		95610014	RESISTANCE	470 OHMS 5% 1/8W	1		0805
R31		95610014	RESISTANCE	470 OHMS 5% 1/8W	1		0805
R32		95610014	RESISTANCE	470 OHMS 5% 1/8W	1		0805
R33		95610014	RESISTANCE	470 OHMS 5% 1/8W	1		0805
R34		95610014	RESISTANCE	470 OHMS 5% 1/8W	1		0805
R35		95610014	RESISTANCE	470 OHMS 5% 1/8W	1		0805
R36		95610014	RESISTANCE	470 OHMS 5% 1/8W	1		0805
R37		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805

Pap Plus Board Extended Memory 42.355.278.89

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
R38		95610017	RESISTANCE	9,76KOHMS 1% 1/8W	1		0805
R39		95610016	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R40		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R41		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R42		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R43		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R44		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R45		95610015	RESISTANCE	4,7KOHMS 5% 1/8W	1		0805
R46		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R47		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R48		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R49		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R50		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R51		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R52		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R53		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R54		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R55		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R56		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R57		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R58		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R59		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R60		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R61		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R62		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R63		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R64		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R65		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R66		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R67		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R68		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R69		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R70		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R71		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R72		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R73		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R74		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R75		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R76		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R77		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R78		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R79		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R80		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R81		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R82		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R83		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R84		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R85		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R86		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R87		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R88		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R89		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R90		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R91		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R92		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R93		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R94		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R95		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R96		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R97		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R98		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R99		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R100		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R101		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R102		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R103		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R104		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R105		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R106		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R107		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R108		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R109		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R110		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R111		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R112		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R113		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R114		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R115		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R116		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R117		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R118		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R119		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R120		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R121		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R122		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R123		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R124		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R125		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
R126		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R127		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R128		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R129		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R130		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R131		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R132		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R133		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R134		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R135		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R136		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R137		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R138		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R139		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R140		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R141		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R142		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R143		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R144		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R145		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R146		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R147		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R148		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R149		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R150		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R151		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R152		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R153		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R154		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R155		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R156		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R157		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R158		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R159		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R160		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R161		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R162		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R163		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R164		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R165		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R166		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R167		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R168		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R169		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R170		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R171		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R172		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R173		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R174		95610013	RESISTANCE	1 KOHMS 5% 1/8W	1		0805
R175		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R176		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R177		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R178		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R179		95610019	RESISTANCE	220 OHMS 5% 1/8W	1		0805
R180		95610019	RESISTANCE	220 OHMS 5% 1/8W	1		0805
R181		95610019	RESISTANCE	220 OHMS 5% 1/8W	1		0805
R182		95610020	RESISTANCE	330 OHMS 5% 1/8W	1		0805
R183		95610020	RESISTANCE	330 OHMS 5% 1/8W	1		0805
R184		95610020	RESISTANCE	330 OHMS 5% 1/8W	1		0805
R185		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R186		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R187		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R188		95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R189	1a	95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R190	1a	95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R191	1a	95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R192	1a	95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R193	1a	95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
R194	1a	95610012	RESISTANCE	10 KOHMS 5% 1/8W	1		0805
ST1	1s		NEANT		0		
ST2	1s		NEANT		0		
ST3	1s		NEANT		0		
ST4	1s		NEANT		0		
ST5	1s		NEANT		0		
ST6	1s		NEANT		0		
ST7	1s		NEANT		0		
ST8	1s		NEANT		0		
ST9	1s		NEANT		0		
ST10	1s		NEANT		0		
ST11	1s		NEANT		0		
ST12	1s		NEANT		0		
ST13	1s		NEANT		0		
ST14	1s		NEANT		0		
ST15	1s		NEANT		0		
ST16	1s		NEANT		0		
ST17	1s		NEANT		0		
ST18	1s		NEANT		0		
ST19	1s		NEANT		0		

Pap Plus Board Extended Memory   42.355.278.89

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
ST20	1s		NEANT		0		
ST21	1s		NEANT		0		
ST22	1s		NEANT		0		
ST23	1s		NEANT		0		
ST24	1s		NEANT		0		
ST25	1s		NEANT		0		
ST26	1s		NEANT		0		
ST27	1s		NEANT		0		
ST28	1s		NEANT		0		
SW1	1m	94420301	REPART MINI WRAP	381-0435-1-20-50-0	0.10	COMATEL	
SW2		94563003	POUSSOIR	9233WWCD	1	APR	
TP1		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP2		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP3		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP4		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP5		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP6		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP7		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP8		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP9		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP10		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP11	3m	94450009	BARRETTE MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP12	1m	94420301	REPART MINI WRAP	381-0435-1-20-50-0	.025	COMATEL	
TP13	3s	94320085	BARRETTE MAL 11Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP14	3s	94320085	BARRETTE MAL 11Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP15	3s	94320085	BARRETTE MAL 11Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP16	3s	94320085	BARRETTE MAL 11Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP17	3s	94320085	BARRETTE MAL 11Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP18	3s	94320085	BARRETTE MAL 11Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP19	3s	94320085	BARRETTE MAL 11Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP20	3s	94320085	BARRETTE MAL 11Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP21	3s	94320085	BARRETTE MAL 11Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP22		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP23		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP24		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP25	3s	94320085	BARRETTE MAL 11Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP26	3s	94320085	BARRETTE MAL 11Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP27		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP28		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP29	3s	94320085	BARRETTE MAL 4Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP30	3s	94320085	BARRETTE MAL 8Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP31	1m	94320085	BARRETTE MAL 11Pts	AM1D-127-20-6,3-T	0.55	ANTELEC	
TP32	3s	94320085	BARRETTE MAL 8Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP33	3s	94320085	BARRETTE MAL 5Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP34	1m	94320085	BARRETTE MAL 11Pts	AM1D-127-20-6,3-T	0.55	ANTELEC	
TP35	1m	94320085	BARRETTE MAL 8Pts	AM1D-127-20-6,3-T	0.4	ANTELEC	
TP36		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP37		94320085	BARRETTE FEM 6Pts	AM1D-127-20-6,3-T	0.3	ANTELEC	
TP38		94320085	BARRETTE MAL 3Pts	AM1D-127-20-6,3-T	0.15	ANTELEC	
TP39		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP40		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP41		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP42	1s		NEANT				
TP43		94320085	BARRETTE MAL 3Pts	AM1D-127-20-6,3-T	0.15	ANTELEC	
TP44		94320085	BARRETTE MAL 4Pts	AM1D-127-20-6,3-T	0.2	ANTELEC	
TP45	3s	94320085	BARRETTE MAL 6Pts	AM1D-127-20-6,3-T	0	ANTELEC	
TP46	1m	94420301	REPART MINI WRAP	381-0435-1-20-50-0	0.10	COMATEL	
TP47		94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP48	1s		NEANT				
TP49	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP50	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP51	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP52	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
TP53	1a	94450009	REPART MINI WRAP	385-0358-1-40-40-0	.025	COMATEL	
U1	3m		CIRCUIT INTEGRE	DSP56002-FC66	1	MOTOROLA	PQFP132
U2		95300206	CIRCUIT INTEGRE	PAL16L8-5JC	1	AMD	PLCC20
U2		00010155	PROGRAMME	"CELXPP"	1		
U3		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U4		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U5	3m		CIRCUIT INTEGRE	XC4003A-5 PQ100C	1	XILINX	PQFP100
U6		95300207	CIRCUIT INTEGRE	PC74HCT157T	1	PHILIPS	SO16
U7		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U8		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
U9	3m		CIRCUIT INTEGRE	DSP56002-FC66	1	MOTOROLA	PQFP132
U10		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U11		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U12	3m		CIRCUIT INTEGRE	XC4003A-5 PQ100C	1	XILINX	PQFP100
U13		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U14		95300207	CIRCUIT INTEGRE	PC74HCT157T	1	PHILIPS	SO16
U15		95300179	CIRCUIT INTEGRE	74FCT833BSO	1	IDT	SOL24
U16		95300179	CIRCUIT INTEGRE	74FCT833BSO	1	IDT	SOL24
U17		95300209	CIRCUIT INTEGRE	DS1000Z-60	1	DALLAS	SO8
U18		95300210	CIRCUIT INTEGRE	74ABT244	1	TEXAS	DIP20
U19		95300211	CIRCUIT INTEGRE	74F08SC	1	NATIONAL	SO14
U20		95300212	CIRCUIT INTEGRE	74HC151T	1	PHILIPS	SO16
U21		95300185	CIRCUIT INTEGRE	AM29F010-120PC	1	AMD	DIP32
U21		00010158	PROGRAMME	"XILPP"	1	AMD	DIP32
U22		95300036	CIRCUIT INTEGRE	27C010-150DC	1	ATHEL	DIP32
U22		00010157	PROGRAMME	"PAPPLUS"	1	ATHEL	DIP32
U23		95300179	CIRCUIT INTEGRE	74FCT833BSO	1	IDT	SOL24
U24		95300194	CIRCUIT INTEGRE	74FCT652CTPY	1	IDT	SSOP24
U25		95300194	CIRCUIT INTEGRE	74FCT652CTPY	1	IDT	SSOP24
U26		95300194	CIRCUIT INTEGRE	74FCT652CTPY	1	IDT	SSOP24
U27		95300194	CIRCUIT INTEGRE	74FCT652CTPY	1	IDT	SSOP24
U28		95300194	CIRCUIT INTEGRE	74FCT652CTPY	1	IDT	SSOP24
U29		95300193	CIRCUIT INTEGRE	74FCT821CTPY	1	IDT	SSOP24
U30		95300193	CIRCUIT INTEGRE	74FCT821CTPY	1	IDT	SSOP24
U31		95300193	CIRCUIT INTEGRE	74FCT821CTPY	1	IDT	SSOP24
U32		95300193	CIRCUIT INTEGRE	74FCT821CTPY	1	IDT	SSOP24
U33		95300193	CIRCUIT INTEGRE	74FCT821CTPY	1	IDT	SSOP24
U34		95360202	CIRCUIT INTEGRE	PAL16R4-7	1		DIP20
U34		00010041	PROGRAMME	"SONRD"	1		
U35		95360202	CIRCUIT INTEGRE	PAL16R4-7	1		DIP20
U35		00010042	PROGRAMME	"SONWR"	1		
U36		95300213	CIRCUIT INTEGRE	PC74HC123T	1	PHILIPS	SO16
U37		95300214	CIRCUIT INTEGRE	74F00SC	1	NATIONAL	SO14
U38		95300192	CIRCUIT INTEGRE	74FCT245CTPY	1	IDT	SSOP20
U39		95300215	CIRCUIT INTEGRE	PC74HC85T	1	PHILIPS	SO16
U40		95300194	CIRCUIT INTEGRE	74FCT652CTPY	1	IDT	SSOP24
U41		95300179	CIRCUIT INTEGRE	74FCT833BSO	1	IDT	SOL24
U42		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
U43		95300216	CIRCUIT INTEGRE	DS26C32ACM	1	NATIONAL	SO16
U44	3m		CIRCUIT INTEGRE	DSP56002-FC66	1	MOTOROLA	PQFP132
U45		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U46		95161075	CIRCUIT INTEGRE	5082-7730	1	HEWLETT	DIP14
U47		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U48	3m		CIRCUIT INTEGRE	XC4003A-5 PQ100C	1	XILINX	PQFP100
U49		95300192	CIRCUIT INTEGRE	74FCT245CTPY	1	IDT	SSOP20
U50		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U51		95300207	CIRCUIT INTEGRE	PC74HCT157T	1	PHILIPS	SO16
U52		95300217	CIRCUIT INTEGRE	PALCE610H-15PC	1	AMD	DIP24 Et
U52		00010148	PROGRAMME	"FEPP"	1		
U53		95300192	CIRCUIT INTEGRE	74FCT245CTPY	1	IDT	SSOP20
U54		95300192	CIRCUIT INTEGRE	74FCT245CTPY	1	IDT	SSOP20
U55		95300191	CIRCUIT INTEGRE	74FCT244CTPY	1	IDT	SSOP20
U56		95300218	CIRCUIT INTEGRE	74060	1	RTC	SO14
U57		95360208	CIRCUIT INTEGRE	PALCE22V10Q-25PC	1	AMD	DIP24 Et
U57		00010131	PROGRAMME	"SROMAD"	1		
U58		95300093	CIRCUIT INTEGRE	PALCE22V10H-15PC	1	AMD	DIP24 Et
U58		00010154	PROGRAMME	"PARPAPP"	1		
U59		95300191	CIRCUIT INTEGRE	74FCT244CTPY	1	IDT	SSOP20
U60		95300191	CIRCUIT INTEGRE	74FCT244CTPY	1	IDT	SSOP20
U61		95300192	CIRCUIT INTEGRE	74FCT245CTPY	1	IDT	SSOP20
U62		95300191	CIRCUIT INTEGRE	74FCT244CTPY	1	IDT	SSOP20
U63	3m		CIRCUIT INTEGRE	XC4005-5PQ160C	1	XILINX	PQFP160
U64	3m		CIRCUIT INTEGRE	XC4005-5PQ160C	1	XILINX	PQFP160
U65	3m		CIRCUIT INTEGRE	XC4010-5MQ208C	1	XILINX	PQFP208
U66	3m		CIRCUIT INTEGRE	DSP56004-FJ50	1	MOTOROLA	PQFP80
U67	3m		CIRCUIT INTEGRE	DSP56004-FJ50	1	MOTOROLA	PQFP80
U68	3m		CIRCUIT INTEGRE	DSP56004-FJ50	1	MOTOROLA	PQFP80
U69	3m		CIRCUIT INTEGRE	DSP56004-FJ50	1	MOTOROLA	PQFP80
U70	3m		CIRCUIT INTEGRE	DSP56004-FJ50	1	MOTOROLA	PQFP80
U71		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
U72		95300192	CIRCUIT INTEGRE	74FCT245CTPY	1	IDT	SSOP20
U73		95300192	CIRCUIT INTEGRE	74FCT245CTPY	1	IDT	SSOP20
U74		95300194	CIRCUIT INTEGRE	74FCT652CTPY	1	IDT	SSOP24
U75		95300194	CIRCUIT INTEGRE	74FCT652CTPY	1	IDT	SSOP24
U76		95300192	CIRCUIT INTEGRE	74FCT245CTPY	1	IDT	SSOP20
U77		95300192	CIRCUIT INTEGRE	74FCT245CTPY	1	IDT	SSOP20
U78		95300219	CIRCUIT INTEGRE	MAX697CWE	1	MAXIM	SOL16
U79		95300220	CIRCUIT INTEGRE	MAX232ACSE	1	MAXIM	SO16
U80		95340006	CIRCUIT INTEGRE	75174	1		DIP16
U81	3m		CIRCUIT INTEGRE	DSP56004-FJ50	1	MOTOROLA	PQFP80
U82	3m		CIRCUIT INTEGRE	DSP56004-FJ50	1	MOTOROLA	PQFP80
U83	3m		CIRCUIT INTEGRE	DSP56004-FJ50	1	MOTOROLA	PQFP80
U84	3m		CIRCUIT INTEGRE	XC4005-5PQ160C	1	XILINX	PQFP160
U85		95300191	CIRCUIT INTEGRE	74FCT244CTPY	1	IDT	SSOP20
U86		95300207	CIRCUIT INTEGRE	PC74HCT157T	1	PHILIPS	SO16
U87		95300207	CIRCUIT INTEGRE	PC74HCT157T	1	PHILIPS	SO16
U88		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
U89		95300191	CIRCUIT INTEGRE	74FCT244CTPY	1	IDT	SSOP20
U90		95300191	CIRCUIT INTEGRE	74FCT244CTPY	1	IDT	SSOP20
U91		95300196	CIRCUIT INTEGRE	74FCT16823CTPV	1	IDT	SSOP56
U92		95300196	CIRCUIT INTEGRE	74FCT16823CTPV	1	IDT	SSOP56
U93		95300191	CIRCUIT INTEGRE	74FCT244CTPY	1	IDT	SSOP20
U94		95300192	CIRCUIT INTEGRE	74FCT245CTPY	1	IDT	SSOP20
U95		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U96		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U97		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U98	3m		CIRCUIT INTEGRE	DSP56002-FC66	1	MOTOROLA	PQFP132
U99		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U100		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U101	3m		CIRCUIT INTEGRE	XC4003A-5PQ100C	1	XILINX	PQFP100
U102		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U103		95300207	CIRCUIT INTEGRE	PC74HCT157T	1	PHILIPS	SO16
U104		95300194	CIRCUIT INTEGRE	74FCT652CTPY	1	IDT	SSOP24

Pap Plus Board Extended Memory   42.355.278.89

REPERE	IND	COMPOSANT	DESIGNATION	VALEUR	QTE	FABRIQ.	BOITIER
U105		95300206	CIRCUIT INTEGRE	PAL16L8-5JC	1	AMD	PLCC20
U105		00010155	PROGRAMME	"CELXPP"	1		
U106		95300194	CIRCUIT INTEGRE	74FCT652CTPY	1	IDT	SSOP24
U107		95300192	CIRCUIT INTEGRE	74FCT245CTPY	1	IDT	SSOP20
U108	3m		CIRCUIT INTEGRE	DSP56002-FC66	1	MOTOROLA	PQFP132
U109		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U110		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U111	3m		CIRCUIT INTEGRE	XC4003A-5PQ100C	1	XILINX	PQFP100
U112		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U113		95300206	CIRCUIT INTEGRE	PAL16L8-5JC	1	AMD	PLCC20
U113		00010155	PROGRAMME	"CELXPP"	1		
U114	3m		CIRCUIT INTEGRE	DSP56002-FC66	1	MOTOROLA	PQFP132
U115		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U116		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U117	3m		CIRCUIT INTEGRE	XC4003A-5PQ100C	1	XILINX	PQFP100
U118		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U119		95300207	CIRCUIT INTEGRE	PC74HCT157T	1	PHILIPS	SO16
U120		95300207	CIRCUIT INTEGRE	PC74HCT157T	1	PHILIPS	SO16
U121		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
U122	3m		CIRCUIT INTEGRE	DSP56002-FC66	1	MOTOROLA	PQFP132
U123		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U124		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U125	3m		CIRCUIT INTEGRE	XC4003A-5PQ100C	1	XILINX	PQFP100
U126		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U127		95300206	CIRCUIT INTEGRE	PAL16L8-5JC	1	AMD	PLCC20
U127		00010155	PROGRAMME	"CELXPP"	1		
U128	3m		CIRCUIT INTEGRE	DSP56002-FC66	1	MOTOROLA	PQFP132
U129		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U130		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U131	3m		CIRCUIT INTEGRE	XC4003A-5PQ100C	1	XILINX	PQFP100
U132		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U133		95300207	CIRCUIT INTEGRE	PC74HCT157T	1	PHILIPS	SO16
U134		95300207	CIRCUIT INTEGRE	PC74HCT157T	1	PHILIPS	SO16
U135		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
U136		95300182	CIRCUIT INTEGRE	DSP56002-FC40	1	MOTOROLA	PQFP132
U137		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U138		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U139	3m		CIRCUIT INTEGRE	XC4003A-5PQ100C	1	XILINX	PQFP100
U140		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U141		95300206	CIRCUIT INTEGRE	PAL16L8-5JC	1	AMD	PLCC20
U141		00010155	PROGRAMME	"CELXPP"	1		
U142	3m		CIRCUIT INTEGRE	DSP56002-FC66	1	MOTOROLA	PQFP132
U143		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U144		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U145	3m		CIRCUIT INTEGRE	XC4003A-5PQ100C	1	XILINX	PQFP100
U146		95300184	CIRCUIT INTEGRE	7130-LA20J	1	IDT	PLCC52
U147		95300207	CIRCUIT INTEGRE	PC74HCT157T	1	PHILIPS	SO16
U148		95300207	CIRCUIT INTEGRE	PC74HCT157T	1	PHILIPS	SO16
U149		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
U150		95300221	CIRCUIT INTEGRE	PAL22V10-5	1	AMD	DIP24 Et
U150		00010156	PROGRAMME	"CEL9PP"	1		
U151		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
U152		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
U153		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
U154		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
U155		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
U156		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
U157		95300192	CIRCUIT INTEGRE	74FCT245CTPY	1	IDT	SSOP20
U158		95300192	CIRCUIT INTEGRE	74FCT245CTPY	1	IDT	SSOP20
U159		95300214	CIRCUIT INTEGRE	74F00SC	1	NATIONAL	SO14
U160		95300208	CIRCUIT INTEGRE	74ACT08SC	1	NATIONAL	SO14
USR1		94530081	ROUE CODEUSE	422066	1	HOPT-SHU	
X1		98230043	POIGNEE EXTRACTEUR	HAUTE REF:131177	0.1	SEEM	
X2		98230044	POIGNEE EXTRACTEUR	BASSE REF:131178	0.1	SEEM	
X3		97612205	VIS V126	CBL M2,5 x 8	2		
X4		97612202	VIS V126	CBL M2,5 x 5	2		
X5		97613203	VIS V106	F/90 M2,5 x 6	2		
X6	1s		NEANT		0		
X7		98230045	OEILLET + VIS	REF:492959	0.02	SEEM	
X8		94330007	SUPPORT LED	AST 0035-9660	2	SHURTER	
X9	1s		NEANT		0		
X10		97880003	ENTRETOISE EXALIS 4	LONGUEUR 5	6	ACCEL	
X11		94480023	VERROUILLAGE FEMELLE	8630-01-060	4	SOURIAU	
X12		94336008	SUPPORT 14Pts COUDE	A14-LED-H	1	ANTELEC	
X13		94480044	SUPPORT CI 4Pts(14)	110-91-314-10-001	2	PRECI-DI	
X14		94480303	SUPPORT CI 16Pts	T401-16	1		
X15		94480305	SUPPORT CI 20Pts	T401-20	3		
X16		94480313	SUPPORT CI 24Pts Etr	T401-24 Etroit	4		
X17		94483000	SUPPORT CI 32Pts	T401-32	2		
X18		94480045	SUPPORT PLCC 20Pts	SCC20T	5	ANTELEC	
X19	1s		NEANT		0		
X20	2a	88527880	CARTE MODULE 32K		4		
X21	2a	88527881	CARTE MODULE 128K		1		

Pap Plus Board Extended Memory 32k x 8   42.355.278.81

DM[00:23]

J1-15 J1-16 J1-17 J1-22 J1-21 J1-20 J1-19 J1-18

DM00 DM01 DM02 DM03 DM04 DM05 DM06 DM07

J1-40 J1-41 J1-42 J1-39 J1-38 J1-37 J1-36 J1-35

DM08 DM09 DM10 DM11 DM12 DM13 DM14 DM15

J1-50 J1-51 J1-52 J1-49 J1-48 J1-47 J1-46 J1-45

DM16 DM17 DM18 DM19 DM20 DM21 DM22 DM23

C1 10nF   C2 10nF   C3 10nF

AM[00:15]   AM[00:15]   AM[00:15]

U1   **U2**   **U3**

Pin	Signal		Pin	Signal
AM00 10 A0	D0 11 DM00	AM00 10 A0	D0 11 DM08
AM01 9 A1	D1 12 DM01	AM01 9 A1	D1 12 DM09
AM02 8 A2	D2 13 DM02	AM02 8 A2	D2 13 DM10
AM03 7 A3	D3 15 DM03	AM03 7 A3	D3 15 DM11
AM04 6 A4	D4 16 DM04	AM04 6 A4	D4 16 DM12
AM05 5 A5	D5 17 DM05	AM05 5 A5	D5 17 DM13
AM06 4 A6	D6 18 DM06	AM06 4 A6	D6 18 DM14
AM07 3 A7	D7 19 DM07	AM07 3 A7	D7 19 DM15
AM08 25 A8		AM08 25 A8	
AM09 24 A9		AM09 24 A9	
AM10 21 A10		AM10 21 A10	
AM11 23 A11	WE 27 WR	AM11 23 A11	WE 27 WR
AM12 2 A12	OE 22 RD	AM12 2 A12	OE 22 RD
AM13 26 A13	CE 20 CS_M	AM13 26 A13	CE 20 CS_M
AM14 1 A14		AM14 1 A14	

CY7C199-20VC   CY7C199-20VC   CY7C199-20VC

DM[00:23]   DM[00:23]   DM[00:23]

J1-61 — WR
J1-62 — RD
J1-64 — CS_M
J1-58
J1-63

AM[00:15]

AM00 AM01 AM02 AM03 AM04 AM05 AM06 AM07
J1-12 J1-11 J1-10 J1-9 J1-8 J1-7 J1-6 J1-5

AM08 AM09 AM10 AM11 AM12 AM13 AM14 AM15
J1-27 J1-28 J1-30 J1-29 J1-32 J1-33 J1-31 J1-25

J1-57 — PAGE2
J1-56 — PAGE1
J1-55 — PAGE0

J1-69
J1-70
J1-71
J1-72

J1-1
J1-2
J1-67
J1-68

J1-3   J1-33 J1-59
J1-4   J1-34 J1-60
J1-13 J1-43 J1-65
J1-14 J1-44 J1-66
J1-23 J1-53
J1-24 J1-54

DESIGNATION	ENSEMBLE / ASSEMBLY	NPE / COMPONENTS LIST : 88 527880
MODULE MEMOIRE 32k x 8	CARTE PAPPLUS	FOLIO / SHEET : 1/1
STUDER		91 328495

SECTION 6

STUDER

Pap Plus Board Extended Memory 32k x 8   42.355.278.81

```
|----------------------------------------------------------------|
|MODIF.: IND. Xa=ajout - IND. Xm=modif. ref. et/ou valeur - IND. Xs=suppression  |
|--------+-----+---------+----------------+------------+-----+-------+--------+
|REPERE  |IND|COMPOSANT|DESIGNATION     |VALEUR        |QTE |FABRIQ. |BOITIER |
|--------+-----+---------+----------------+------------+-----+-------+--------+
|A1      |    |91328495 |SCHEMA          |            |1   |       |        |
|A2      |    |91830851 |FILM CIRCUIT    |            |1   |       |        |
|A3      |    |30830851 |TEST DE CONFORMITE |         |1   |       |        |
|A4      |    |91830852 |FILM DE SERIGRAPHIE |        |1   |       |        |
|A5      |    |91830853 |FILM EPARGNE SOUDURE|        |1   |       |        |
|A6      |    |91830854 |FILM PATE A BRASER  |        |1   |       |        |
|A7      |    |30830854 |ECRAN PATE A BRASER |        |1   |       |        |
|A8      |    |91328496 |PLAN DE FABRICATION |        |1   |       |        |
|A9      |    |30328496 |OUTIL DE FABRICATION|        |1   |       |        |
|A10     |    |91815505 |ETIQUETTE REPERE CONNECTEUR |1   |       |        |
|C1      |    |95500020 |CONDENSATEUR    X7R |10nF    20%|1   |       |0805    |
|C2      |    |95500020 |CONDENSATEUR    X7R |10nF    20%|1   |       |0805    |
|C3      |    |95500020 |CONDENSATEUR    X7R |10nF    20%|1   |       |0805    |
|U1      |    |95300189 |CIRCUIT INTEGRE |CY7C199-20VC |1   |CYPRESS|SOJ28   |
|U2      |    |95300189 |CIRCUIT INTEGRE |CY7C199-20VC |1   |CYPRESS|SOJ28   |
|U3      |    |95300189 |CIRCUIT INTEGRE |CY7C199-20VC |1   |CYPRESS|SOJ28   |
|----------------------------------------------------------------|
```

Pap Plus Board Extended Memory 128k x 8   42.355.278.80

J1-15 J1-16 J1-17 J1-22 J1-21 J1-20 J1-19 J1-18

J1-40 J1-41 J1-42 J1-39 J1-37 J1-36 J1-35

J1-50 J1-51 J1-52 J1-49 J1-48 J1-47 J1-46 J1-45

DM00 DM01 DM02 DM03 DM04 DM05 DM06 DM07

DM08 DM09 DM10 DM11 DM12 DM13 DM14 DM15

DM16 DM17 DM18 DM19 DM20 DM21 DM22 DM23

DM[00:23]   DM[00:23]

C1 10nF   C2 10nF   C3 10nF

U1   U2   U3

MCM6226AWJ
MT5C1008-20DJ

MCM6226AWJ
MT5C1008-20DJ

MCM6226AWJ
MT5C1008-20DJ

AM00 12 A0
AM01 11 A1
AM02 10 A2
AM03 9 A3
AM04 8 A4
AM05 7 A5
AM06 6 A6
AM07 5 A7
AM08 27 A8
AM09 26 A9
AM10 23 A10
AM11 25 A11
AM12 4 A12
AM13 28 A13
AM14 3 A14
AM15 31 A15
PAGE0 2 A16
PAGE2 1 NC

D00 13 DMD0
D01 14 DMD1
D02 15 DMD2
D03 17 DMD3
D04 18 DMD4
D05 19 DMD5
D06 20 DMD6
D07 21 DMD7

E2 30 PAGE1
W 29
G 24
ET 22

WR
RD
CS_M

D00 13 DM08
D01 14 DM09
D02 15 DM10
D03 17 DM11
D04 18 DM12
D05 19 DM13
D06 20 DM14
D07 21 DM15

D00 13 DM16
D01 14 DM17
D02 15 DM18
D03 17 DM19
D04 18 DM20
D05 19 DM21
D06 20 DM22
D07 21 DM23

DM[00:23]

J1-61 WR
J1-62 RD
J1-64 CS_M
J1-58
J1-63

PAGE2
PAGE1
PAGE0

AM[00:15]   AM[00:15]   AM[00:15]

J1-55
J1-57

512K
SW2
J1-56

SW1

128K

AM00 AM01 AM02 AM03 AM04 AM05 AM06 AM07
J1-12 J1-11 J1-10 J1-9 J1-8 J1-7 J1-6 J1-5

AM08 AM09 AM10 AM11 AM12 AM13 AM14 AM15
J1-27 J1-28 J1-30 J1-29 J1-32 J1-26 J1-31 J1-25

J1-1
J1-2
J1-67
J1-68

J1-3   J1-33 J1-59
J1-4   J1-34 J1-60
J1-13 J1-43 J1-65
J1-14 J1-44 J1-66
J1-23 J1-53
J1-24 J1-54

J1-69
J1-70
J1-71
J1-72

DESIGNATION	ENSEMBLE / ASSEMBLY	NRC / COMPONENTS LIST : 39 527881
MODULE MEMOIRE 128Kx8	CARTE PAPPLUS	FOLIO / SHEET · 1/1
STUDER		91 328497

STUDER

Pap Plus Board Extended Memory 128k x 8   42.355.278.80

```
|----------------------------------------------------------------|
|MODIF.: IND. Xa=ajout - IND. Xm=modif. ref. et/ou valeur - IND. Xs=suppression |
|-----------+----+---------+-----------------+-----------+----+--------+---------|
|REPERE     |IND |COMPOSANT|DESIGNATION      |VALEUR     |QTE |FABRIQ. |BOITIER  |
|-----------+----+---------+-----------------+-----------+----+--------+---------|
|A1         |    |91328497 |SCHEMA           |           |1   |        |         |
|A2         |    |91830855 |FILM CIRCUIT     |           |1   |        |         |
|A3         |    |30830855 |TEST DE CONFORMITE |         |1   |     1  |         |
|A4         |    |91830856 |FILM DE SERIGRAPHIE |        |1   |        |         |
|A5         |    |91830857 |FILM EPARGNE SOUDURE|        |1   |        |         |
|A6         |    |91830858 |FILM PATE A BRASER |         |1   |        |         |
|A7         |    |30830858 |ECRAN PATE A BRASER |        |1   |        |         |
|A8         |    |91328498 |PLAN DE FABRICATION |        |1   |        |         |
|A9         |    |30328498 |OUTIL DE FABRICATION|        |1   |        |         |
|A10        |    |91815505 |ETIQUETTE REPERE CONNECTEUR |1  |        |         |
|C1         |    |95500020 |CONDENSATEUR  X7R |10nF   20% |1   |        |0805     |
|C2         |    |95500020 |CONDENSATEUR  X7R |10nF   20% |1   |        |0805     |
|C3         |    |95500020 |CONDENSATEUR  X7R |10nF   20% |1   |        |0805     |
|U1         |    |95100190 |CIRCUIT INTEGRE  |MT5C1008-20DJ |1 |MICRON  |SOJ32    |
|U2         |    |95100190 |CIRCUIT INTEGRE  |MT5C1008-20DJ |1 |MICRON  |SOJ32    |
|U3         |    |95100190 |CIRCUIT INTEGRE  |MT5C1008-20DJ |1 |MICRON  |SOJ32    |
|----------------------------------------------------------------|
```
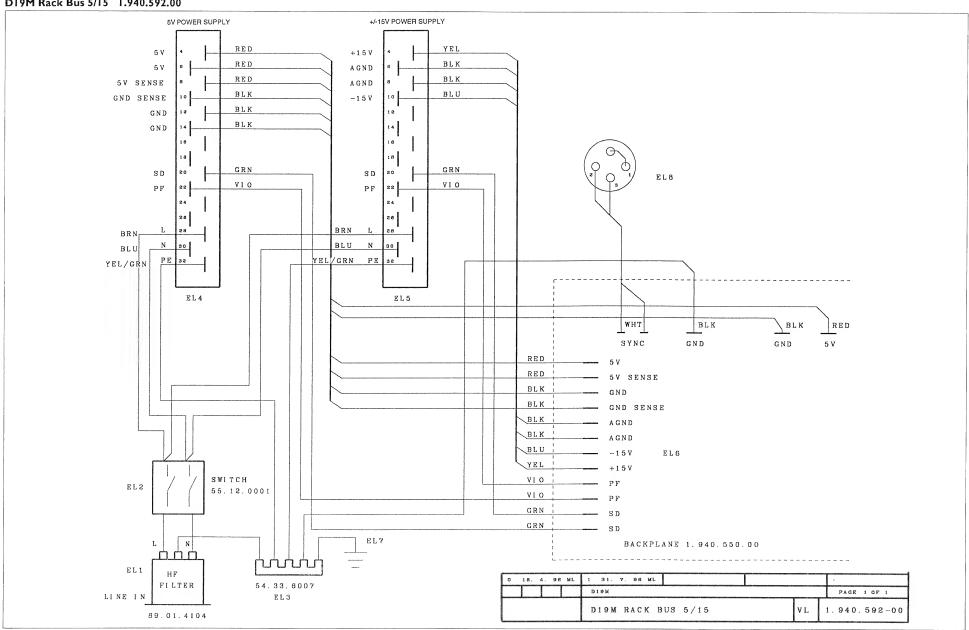
SCHEMATA / CIRCUIT DIAGRAMS
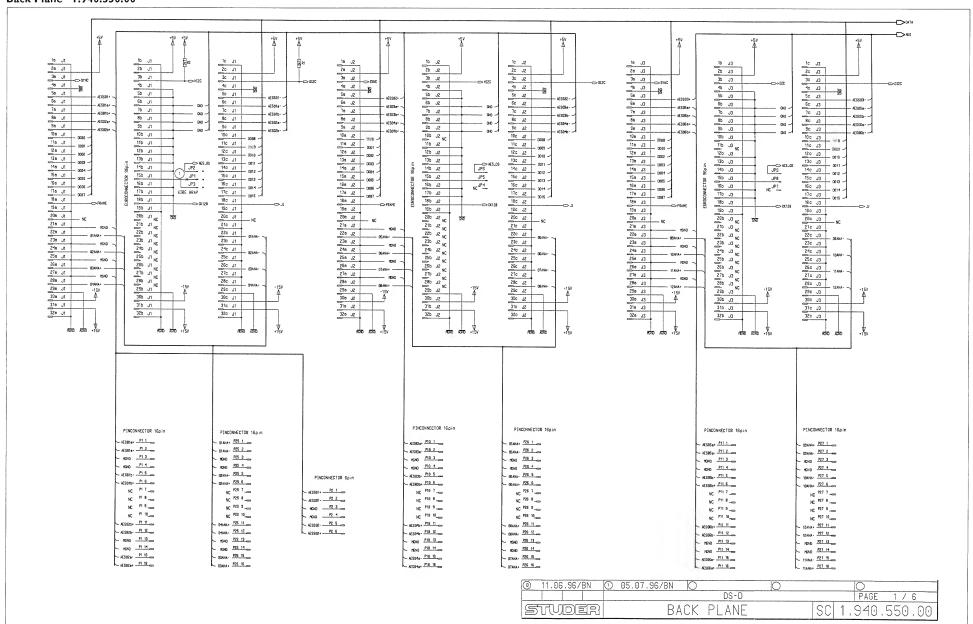
D19M Rack Bus 5/15   1.940.592.00

5V POWER SUPPLY   +/-15V POWER SUPPLY

5V   4   RED   +15V   4   YEL

5V   6   RED   AGND   6   BLK

5V SENSE   8   RED   AGND   8   BLK

GND SENSE   10   BLK   -15V   10   BLU

GND   12   BLK   12

GND   14   BLK   14

16   16

18   18

SD   20   GRN   SD   20   GRN

PF   22   VIO   PF   22   VIO

24   24

26   26

BRN   L   28   BRN   L   28

BLU   N   30   BLU   N   30

YEL/GRN   PE   32   YEL/GRN   PE   32

EL4   EL5

EL8

WHT   BLK   BLK   RED

SYNC   GND   GND   5V

RED   5V

RED   5V SENSE

BLK   GND

BLK   GND SENSE

BLK   AGND

BLK   AGND

BLU   -15V   EL6

YEL   +15V

VIO   PF

EL2   SWITCH   VIO   PF

      55.12.0001   GRN   SD

      GRN   SD

L   N   EL7   BACKPLANE 1.940.550.00

EL1   HF FILTER

LINE IN   54.33.6007

      EL3

89.01.4104

0	18. 4. 96 ML	1	31. 7. 96 ML				
			D19M				PAGE 1 OF 1
			D19M RACK BUS 5/15			VL	1.940.592-00

Back Plane 1.940.550.00

STUDER

Back Plane   1.940.550.00

⑨	11.06.96/BN	①	05.07.96/BN	○		○		○	
					DS-D			PAGE 2 / 6	

STUDER   BACK PLANE   SC 1.940.550.00

Back Plane   1.940.550.00

STUDER

Back Plane 1.940.550.00

⓪ 11.06.96/BN	① 05.07.96/BN				
			DS-D		PAGE 4 / 6
STUDER		BACK PLANE		SC	1.940.550.00

Back Plane 1.940.550.00

STUDER

Back Plane   1.940.550.00

BUS MAPPING

From EXTERNAL POWER SUPPLY

PINCONNECTOR 16pin

PINCONNECTOR 16pin

PINCONNECTOR 6pin

	11.06.96/BN			05.07.96/BN				

DS-D   PAGE 6 / 6

STUDER   BACK PLANE   SC 1.940.550.00

Back Plane   1.940.550.00

1.940.550-XX

STUDER

MP3...MP18 on JP1...JP48 fitted

MP 1

Cut PC-track

				③
				②
05.07.96	BN			①
11.06.96	BN			⓪

STUDER REGENSDORF	BACK PLANE	1.940.550-00

Back Plane 1.940.550.00

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	D 1	50.04.0507		1N5402	D 1 N 5402,
0	D 2	50.04.0507		1N5402	D 1 N 5402,
0	DS 1	55.01.0168		8*a	SZ ,8*A, DIL
0	DS 2	55.01.0168		8*a	SZ ,8*A, DIL
0	J 1	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 2	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 3	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 4	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 5	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 6	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 7	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 8	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 9	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 10	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 11	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 12	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 13	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 14	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 15	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 16	1.940.550.01			MESSERLEISTE 96 pol DIN 41612
0	J 17	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 18	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 19	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 20	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	J 21	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	J 22	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 23	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 24	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 25	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 26	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 27	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 28	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 29	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 30	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 31	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 32	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	J 33	54.02.0335		1p	P FLACH, 6.3*0,8, GERADE
0	JP 1	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 2	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 3	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 4	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 5	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 6	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 7	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 8	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 9	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 10	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 11	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 12	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 13	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 14	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 15	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 16	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 17	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 18	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 19	54.01.0020		1-P	P STIFT .63*.83, H=5.8/3.4
0	JP 20	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 21	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 22	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 23	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 24	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 25	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 26	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 27	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 28	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 29	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 30	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 31	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 32	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 33	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 34	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 35	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 36	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 37	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 38	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 39	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 40	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 41	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	JP 42	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 43	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 44	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 45	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 46	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 47	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	JP 48	54.01.0020		1-P	P STIFT .63*.63, H=5.8/3.4
0	MP 1	1.940.550.11			BACK PLANE PCB
0	MP 2	1.940.550.04			NR. ETIKETTE 5 * 20
0	MP 3	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 4	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 5	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 6	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 7	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 8	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 9	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 10	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 11	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 12	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 13	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 14	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 15	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 16	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 17	54.01.0021		Jumper	0.63 * 0.63mm
0	MP 18	54.01.0021		Jumper	0.63 * 0.63mm
1	P 1	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
0	P 2	not used		6p	1/20" Au, gerade, ohne Verrieg
0	P 3	not used		6p	1/20" Au, gerade, ohne Verrieg
0	P 4	not used		6p	1/20" Au, gerade, ohne Verrieg
0	P 5	not used		6p	1/20" Au, gerade, ohne Verrieg
0	P 6	not used		6p	1/20" Au, gerade, ohne Verrieg
0	P 7	not used		6p	1/20" Au, gerade, ohne Verrieg
0	P 8	not used		6p	1/20" Au, gerade, ohne Verrieg
0	P 9	not used		6p	1/20" Au, gerade, ohne Verrieg
1	P 10	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 11	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 12	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 13	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 14	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 15	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 16	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 17	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 18	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 19	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 20	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 21	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 22	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 23	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 24	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 25	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 26	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 27	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 28	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 29	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 30	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 31	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 32	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 33	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 34	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 35	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 36	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 37	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 38	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 39	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 40	54.14.2142		16p	1/20" Au, gerade, o Verr, 4mm
1	P 41	54.14.2141		10p	1/20" Au, gerade, o Verr, 4mm
0	R 1	57.10.1272		2k7	MF, 1%, 0204
0	R 2	57.10.1272		2k7	MF, 1%, 0204
0	R 3	57.10.1471		470R	MF, 1%, 0204
0	R 4	57.10.1681		680R	MF, 1%, 0204
0	R 5	57.10.1681		680R	MF, 1%, 0204
0	R 6	57.10.1471		470R	MF, 1%, 0204
0	R 7	57.10.1471		470R	MF, 1%, 0204
0	R 8	57.10.1471		470R	MF, 1%, 0204
0	R 9	57.10.1471		470R	MF, 1%, 0204
0	R 10	57.10.1471		470R	MF, 1%, 0204
0	R 11	57.10.1681		680R	MF, 1%, 0204
0	R 12	57.10.1471		470R	MF, 1%, 0204

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	R 13	57.10.1681		680R	MF, 1%, 0204
0	R 14	57.10.1681		680R	MF, 1%, 0204
0	R 15	57.10.1681		680R	MF, 1%, 0204
0	R 16	57.10.1681		680R	MF, 1%, 0204
0	R 17	57.10.1471		470R	MF, 1%, 0204
0	R 18	57.10.1681		680R	MF, 1%, 0204
0	RZ 1	57.88.4471		470.	RZ 8 * 470 , 2%, SIP 9
0	RZ 2	57.88.4681		680.	RZ 8 * 680 , 2%, SIP 9
0	RZ 3	57.88.4471		470.	RZ 8 * 470 , 2%, SIP 9
0	RZ 4	57.88.4681		680.	RZ 8 * 680 , 2%, SIP 9
0	RZ 5	57.88.4471		470.	RZ 8 * 470 , 2%, SIP 9
0	RZ 6	57.88.4681		680.	RZ 8 * 680 , 2%, SIP 9
0	RZ 7	57.88.4471		470.	RZ 8 * 470 , 2%, SIP 9
0	RZ 8	57.88.4681		680.	RZ 8 * 680 , 2%, SIP 9

———————————————— End of List ————————————————

Comments
Plugs with longer solder pins requested, wire added.

7   POWER SUPPLY UNITS

General   For the power supply of the D940/D941 mixing consoles, Coutant 19" units (HSU series) are used which are equipped with a Studer front panel.

Studer Part No.	Description	Basic Coutant product
1.940.601.00	Power Supply 5 V/20 A	HSU-100-10
1.940.602.00	Power Supply ±15 V/3.4 A	HSU-100-23
1.940.603.00	Power Supply 24 V/4.2 A	HSU-100-13

Important   As the power supply units are safety-relevant parts, they may be serviced only by authorized personnel using original spare parts.
For replacement, contact your nearest Studer representative; for repair, contact the nearest Coutant distributor. The Coutant brand is represented worldwide by companies with the following names:
Coutant, Coutant-Lambda, Lambda-Coutant, Lambda electronics, Nemic-Lambda, or CL electronics.

7.1   Specifications

Mains voltages: 230 V (200...240 V ±10%)
115 V (100...120 V ±10%)

Voltage selector: Jumper below cover

Mains frequency: 47...440 Hz

Efficiency: typ. 75%
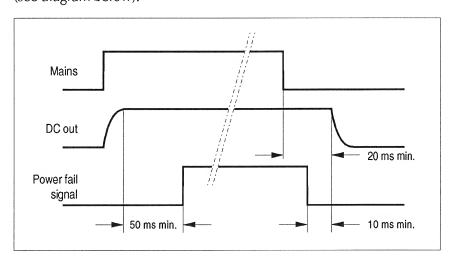
Output power: 100 W total

Output(s):   short-circuit protected, main output(s) overload protected (110%)

Power down (logic inhibit):   Control input, TTL compatible, active high (5 V/1.6 mA)
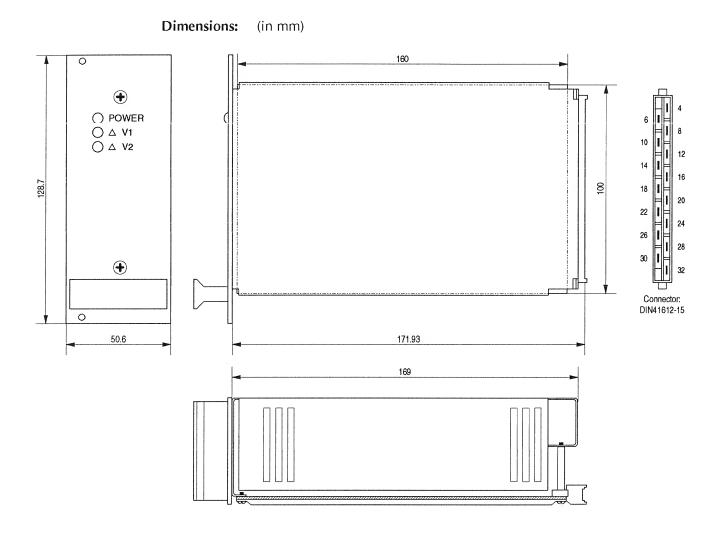
Power fail: Output, open collector, TTL compatible, active low (max. 30 V/16 mA) (see diagram below).

Dimensions: (in mm)

Connector:
DIN41612-15

Pin assignment:
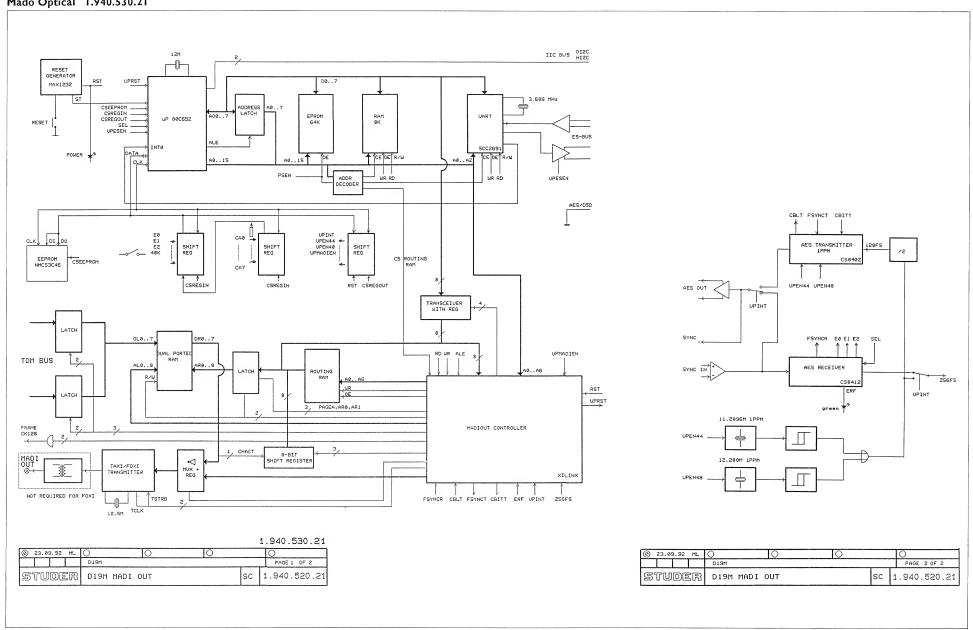
Pin	Single output	Twin output
4	V1 +	V1 +
6	V1 +	V1 GND
8	Sense +	V2 –
10	Sense GND	V2 GND
12	V1 GND	
14	V1 GND	
16		
18		
20	Logic inhibit	Logic inhibit
22	Power fail	Power fail
24		
26		
28	AC live	AC live
30	AC neutral	AC neutral
32	Safety GND	Safety GND

SCHEMATA / CIRCUIT DIAGRAMS

Block Diagram
D19M Mado Coaxial 1.940.520.21
Mado Optical 1.940.530.21

IIC BUS DI2C
HI2C

RESET
GENERATOR
MAX1232

RST   UPRST

ST

RESET

CSEEPROM
CSREGIN
CSREGOUT
SEL
UPESEN

POWER

12M

uP 80C652

INT0   ALE

DATA
CLK

A0..7

A8..15

ADDRESS
LATCH

A0..7

D0..7

EPROM
64K

RAM
8K

UART

SCC2691

3.686 MHz

ES-BUS

UPESEN

AES/DSD

A0..15   OE

PSEN

ADDR
DECODER

CE OE R/W
WR RD

A0..A2 CE OE R/W
WR RD

CLK DI DO

EEPROM
NMCS3C46

CSEEPROM

E0
E1
E2
48K

SHIFT
REG

CA0

CA7

SHIFT
REG

UPINT
UPEN44
UPEN48
UPMAOIEN

SHIFT
REG

CS ROUTING
RAM

CSREGIN

CSREGIN

RST CSREGOUT

8

TRANSCEIVER
WITH REG

4

8

LATCH

OL0..7

TDM BUS

2

LATCH

DUAL PORTED
RAM

AL0..8

R/W

AR0..8

DR0..7

LATCH

ROUTING
RAM

A0..A6
WR
OE

RD WR ALE

8

A0..A6

UPMADIEN

2

3 PAGEA,AR0,AR1

FRAME
CK128

2

2

3

MADIOUT CONTROLLER

XILINX

RST

UPRST

MADI
OUT

NOT REQUIRED FOR FOXI

TAXI/FOXI
TRANSMITTER

MUX +
REG

1 CHACT

8-BIT
SHIFT REGISTER

3

12.5M TCLK

TSTRB

2

FSYNCR CBLT FSYNCT CBITT ERF UPINT 256FS

1.940.530.21

CBLT FSYNCT CBITT

AES TRANSMITTER
1PPM

CS8402

128FS /2

AES OUT

UPINT

UPEN44 UPEN48

SYNC

SYNC IN

AES RECEIVER

CS8412

ERF

green

FSYNCR E0 E1 E2 SEL

256FS

UPINT

11.2896M 1PPM

UPEN44

12.288M 1PPM

UPEN48

© 23.09.92 ML	○	○	○	○	
	D19M			PAGE 1 OF 2	
STUDER	D19M MADI OUT			SC	1.940.520.21

© 23.09.92 ML	○	○	○	○	
	D19M			PAGE 2 OF 2	
STUDER	D19M MADI OUT			SC	1.940.520.21

SECTION 8

D19M Mado Coaxial 1.940.520.21
Mado Optical 1.940.530.21

OPTICAL VERSION: 1.940.530.21

○ 06.03.97 LC	④ 28.05.98 ML ○	○	○

DS-D | PAGE 1 OF 3

STUDER | DSD MADO COAX | SC 1.940.520.21

D19M Mado Coaxial 1.940.520.21
Mado Optical 1.940.530.21

OPTICAL VERSION: 1.940.520.21

⓪ 06.03.97 LC	① 28.05.98 ML ◯		◯		◯
		DS-D			PAGE 2 OF 3
STUDER		DSD MADO COAX		SC	1.940.520.21

D19M Mado Coaxial 1.940.520.21
Mado Optical 1.940.530.21

NOT USED FOR OPTICAL VERSION

FOR OPTICAL VERSION
USE DLT 6000

OPTICAL VERSION: 1.940.530.21

⓪ 06.03.97 LC	① 28.05.98 ML	◯	◯	◯
		DS-D		PAGE 3 OF 3

STUDER DSD MADO COAX SC 1.940.520.21

STUDER

★ **Cut pin 16 and connect pin 16 with pin 24 and C4 (VCC)**

Modification Änderung	.	.	.	.	③
	.	.	.	.	②
28.05.98	AF	.	.	①
Edition Ausgabe	06.03.97	hm	ML	HM	⓪
	Date Datum	Visa Gez.	Dessin Gepr.	Seen Ges.	Index
Copy to: Kopie für:					

| **STUDER** REGENSDORF | Bezeichnung Benennung: | D19M MADO Coax. | ESE | Nummer: Nummer: | 1.940.520.21 |

D19M Mado Coaxial 1.940.520.21

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	C 1	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 2	59.34.2390		39p	CER 63V, 5%, N150
0	C 3	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 4	59.06.0683		68n	PETP, 63V, 10%, RM5
1	C 5	59.22.5220		22u	EL 25V, 20%, RM5
0	C 6	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 7	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 8	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 9	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 10	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 11	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 12	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 13	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 14	59.34.2390		39p	CER 63V, 5%, N150
0	C 15	59.34.2390		39p	CER 63V, 5%, N150
0	C 16	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 17	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 18	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 19	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 20	59.34.4101		100p	CER 63V, 5%, N750
0	C 21	59.22.3470		47u	EL 10V, 20%, RM5
0	C 22	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 23	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 24	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 25	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 26	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 27	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 28	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 29	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 30	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 31	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 32	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 33	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 34	59.22.6100		10u	EL 35V, 20%, RM5
0	C 35	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 36	59.22.4221		220u	EL 16V, 20%, RM5
0	C 37	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 38	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 39	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 40	59.22.4221		220u	EL 16V, 20%, RM5
0	C 41	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 42	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 43	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 44	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 45	59.22.6100		10u	EL 35V, 20%, RM5
0	C 46	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 47	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 48	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 49	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 50	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 51	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 52	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 53	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 54	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 55	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 56	59.34.2270		27p	CER 63V, 5%, N150
0	C 57	59.34.0339		3p3	CER 63V, 5%, P100
0	C 58	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 59	59.22.6100		10u	EL 35V, 20%, RM5
0	C 60	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 61	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 62	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 63	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 64	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 65	59.22.6100		10u	EL 35V, 20%, RM5
0	C 66	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 67	59.34.0339		3p3	CER 63V, 5%, P100
0	C 68	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 69	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 70	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 71	59.34.2270		27p	CER 63V, 5%, N150
0	C 72	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 73	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 74	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	D 1	50.04.0127		BAT85	200mA, Schottky
0	D 2	50.04.0127		BAT85	200mA, Schottky
0	D 3	50.04.0127		BAT85	200mA, Schottky
0	D 4	50.04.0127		BAT85	200mA, Schottky
0	D 5	50.04.0127		BAT85	200mA, Schottky
0	D 6	50.04.0125		1N4448	75V, 150mA, 4ns, DO-35
0	D 7	50.04.0125		1N4448	75V, 150mA, 4ns, DO-35
0	DL 1	50.04.2202		HLMP1790	DL HLMP - 1790 GN
0	DL 2	50.04.2202		HLMP1790	DL HLMP - 1790 GN

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	F 1	51.01.0119		1.6A	T 5*20 L 250V
0	IC 1	1.940.946.21			SW 520 MADIOUT (50.14.1501)
0	IC 2	50.13.0203			IC CS 8402-CP ,A
0	IC 3	50.63.4003			IC ATT3030-125, XC3030A-6 ,A
0	IC 4	50.14.1009		CY7C128-35	IC MCM 2018 A - 35 ,A
0	IC 5	50.17.5652		74AC652	IC .. 74 AC 652 . ,A
0	IC 6	50.13.0202		CS8412	IC CS 8412-CP ,A
0	IC 7	50.17.1574		74HC574	IC ... 74 HC 574 ., ,A
0	IC 8	50.16.0701		AM7968-125P	IC AM 7968-125 PC ,A
0	IC 9	50.17.1595		74HC595	IC ... 74 HC 595 ., ,A
0	IC 10	50.11.1002		LM360	High speed Comparator
0	IC 11	1.940.947.20			SW 520 TAXIREG (50.18.0101)
0	IC 12	50.17.1004		74HC04	IC ... 74 HC 04 ., ,A
0	IC 13	50.10.0124		MAX660	V-Converter ... +5.5V to -5.5V
0	IC 14	50.63.1702		CY7C130	IC CY7C 130 - 45 LC ,A
0	IC 15	50.17.8541		74BCT541	Octal Buffer, tri
0	IC 16	50.17.8574		74BCT574	Octal D-Type FF, tri
0	IC 17	50.17.8574		74BCT574	Octal D-Type FF, tri
0	IC 18	50.15.0121		75174	IC SN 75174 N
0	IC 19	50.17.1594		74HC594	IC ... 74 HC 594 ., ,A
0	IC 20	50.14.0133		5565	IC HM 6264LP-15 ,A
0	IC 21	1.940.945.20			SW 520 MADO (50.14.2002)
0	IC 22	50.16.0201		SCC2691	IC SCC 2691 AE 1 N 24 ,A
0	IC 23	50.14.2103		HY93C46S	EEPROM 64 * 16, serial
0	IC 24	50.17.0573		74HCT573	IC .. 74 HCT573 ., ,A
0	IC 25	50.63.0009		80C652	8bit microcontroller
0	IC 26	50.17.1589		74HC589	MC 74 HC 589 N
0	IC 27	50.17.1589		74HC589	MC 74 HC 589 N
0	IC 28	50.15.0114		9637	Dual diff Line Receiver
0	IC 29	50.17.1904		74HCU04	IC ... 74 HCU 04 ., ,A
0	IC 30	50.11.0159		MAX1232	IC MAX 1232 CPA, DS 1232
0	J 1	54.21.2031		BNC	J 1 POL PRINT/WINKEL BNC
1	L 1	62.02.3101		100uH	10%, radial RM 5
0	L 2	62.02.3100		10uH	10%, radial RM 5
0	L 3	62.02.3220		22uH	10%, radial RM 5
0	L 4	62.02.3100		10uH	10%, radial RM 5
0	L 5	62.03.0001		10uH	1A Toroid Chocke
0	L 6	62.02.3100		10uH	10%, radial RM 5
0	L 7	62.02.3100		10uH	10%, radial RM 5
0	MP 1	1.940.520.11			D19M MADO PCB
0	MP 2	1.010.057.43			Baugruppenschild
0	MP 3	43.01.0108		Label	ESE-WARNSCHILD
0	MP 4	1.101.001.20		Label	TEXT-ETIK. 5*20 HARDWARE -20
0	MP 5	1.010.117.51			TEXT-ETIK. 5*20 (T1.60A)
0	MP 7	1.010.015.50		Spacer	ISOLIER-SCHEIBE ZU T0 5
0	MP 8	89.01.1499	3 pcs		QUARZ - ISOLIERPLATTE
0	MP 10	1.940.520.10	1 pce		FRONTPLATTE
0	MP 11	1.940.600.04	1 pce		GRIFFEINLAGE 4TE
0	MP 12	49.02.0520	2 pcs	M2.5*12	Rändelschraube (Rack)
0	MP 13	49.02.0521	2 pcs		Metall-Buchse (Rack)
0	MP 14	49.02.0522	2 pcs		Kartenhalter (Rack)
0	MP 15	49.02.0523	2 pcs	M2.5*7	Senk-Schr, KS, Senkripp
0	MP 16	49.02.0504	1 pce	4TE	Frontplatten-Griff
0	MP 17	21.53.0279	2 pcs		Z - SCHR. IS , ZN , M2.5 * 6
0	MP 18	21.53.0284	1 pce		Z - SCHR. IS , ZN , M2.5 * 16
0	MP 19	28.99.0119	2 pcs		ROHRNIETE D 2.5*0.15* 9
0	P 1	54.11.2009		96p	EU-R 3*32p
0	P 2	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	P 3	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	P 4	54.01.0020		1p	Pin 0.63*0.63
0	P 5	54.01.0020		1p	Pin 0.63*0.63
0	P 6	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	P 7	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	P 8	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	Q 1	50.03.0351		BC327-25	PNP, 800mA
0	Q 2	50.03.0351		BC327-25	PNP, 800mA
0	R 1	57.11.3102		1k0	MF, 1%, 0207
0	R 2	57.11.3103		10k	MF, 1%, 0207
0	R 3	57.11.3103		10k	MF, 1%, 0207
0	R 4	57.11.3103		10k	MF, 1%, 0207
0	R 5	57.11.3103		10k	MF, 1%, 0207
0	R 6	57.11.3150		15R	MF, 1%, 0207
0	R 7	57.11.3271		270R	MF, 1%, 0207
0	R 8	57.11.3150		15R	MF, 1%, 0207
0	R 9	57.11.3271		270R	MF, 1%, 0207
0	R 10	57.11.3102		1k0	MF, 1%, 0207
0	R 11	57.11.3103		10k	MF, 1%, 0207
0	R 12	57.11.3102		1k0	MF, 1%, 0207

D19M Mado Coaxial   1.940.520.21

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	R 13	57.11.3102		1k0	MF, 1%, 0207
0	R 14	57.11.3102		1k0	MF, 1%, 0207
0	R 15	not used		470R	MF, 1%, 0207
0	R 16	57.11.3102		1k0	MF, 1%, 0207
0	R 17	57.11.3223		22k	MF, 1%, 0207
0	R 18	57.10.1101		100R	MF, 1%, 0204
0	R 19	57.11.3102		1k0	MF, 1%, 0207
0	R 20	57.11.3330		33R	MF, 1%, 0207
0	R 21	57.11.3181		180R	MF, 1%, 0207
0	R 22	57.10.1101		100R	MF, 1%, 0204
0	R 23	57.11.3223		22k	MF, 1%, 0207
0	R 24	57.10.1750		75R	MF, 1%, 0204
0	R 25	57.10.1750		75R	MF, 1%, 0204
0	R 26	57.11.3103		10k	MF, 1%, 0207
0	R 27	57.11.3102		1k0	MF, 1%, 0207
0	R 28	57.11.3102		1k0	MF, 1%, 0207
0	R 29	57.11.3222		2k2	MF, 1%, 0207
0	R 30	57.11.3222		2k2	MF, 1%, 0207
0	R 31	57.11.3102		1k0	MF, 1%, 0207
0	R 32	57.11.3103		10k	MF, 1%, 0207
0	R 33	57.11.3103		10k	MF, 1%, 0207
0	R 34	57.11.3103		10k	MF, 1%, 0207
0	R 35	57.11.3102		1k0	MF, 1%, 0207
0	R 36	57.11.3105		1M0	MF, 1%, 0207
0	R 37	57.11.3561		560R	MF, 1%, 0207
0	R 38	57.11.3473		47k	MF, 1%, 0207
0	R 39	57.11.3103		10k	MF, 1%, 0207
0	R 40	57.11.3473		47k	MF, 1%, 0207
0	R 41	57.11.3561		560R	MF, 1%, 0207
0	RZ 1	57.88.4102		8*1k	2%, SIP 9
0	RZ 2	57.88.4102		8*1k	2%, SIP 9
0	RZ 3	57.88.4102		8*1k	2%, SIP 9
0	RZ 4	57.88.4102		8*1k	2%, SIP 9
0	RZ 5	57.88.4102		8*1k	2%, SIP 9
0	RZ 6	57.88.4333		8*33k	2%, SIP 9
0	S 1	55.11.0202		SPST	Toggle on - none - on
0	S 2	55.03.0122		1*a	S 1 TASTE, 1*A, PRINT,IMPULS
0	T 1	63.15.0021			RF - Trafo
0	T 2	63.15.0021			RF - Trafo
0	T 3	63.15.0001			IMPULSTRANSFORMATOR
0	W 1	1.010.324.64		Wire	DRAHTBRUECKE U, 4.3*10.2, 0.6
0	W 2	1.010.324.64		Wire	DRAHTBRUECKE U, 4.3*10.2, 0.6
0	XDL 1	50.20.2501		Spacer	LED-Sockel
0	XDL 2	50.20.2501		Spacer	LED-Sockel
0	XF 1	53.03.0118			XF 5 * 20, PRINT-LIEGEND
0	XIC 1	53.03.0166		8p	DIL 0.3", löt, gerade
0	XIC 3	53.03.2284		PLCC84p	PLCC-Socket 84p
0	XIC 11	53.03.0182		24p	DIL 0.3", löt, gerade
0	XIC 14	53.03.2252		PLCC52p	PLCC-Socket 52p
0	XIC 15	53.03.0165		20p	DIL 0.3", löt, gerade
0	XIC 16	53.03.0165		20p	DIL 0.3", löt, gerade
0	XIC 17	53.03.0165		20p	DIL 0.3", löt, gerade
0	XIC 18	53.03.0168		16p	DIL 0.3", löt, gerade
0	XIC 21	53.03.0173		28p	DIL 0.6", löt, gerade
0	XIC 25	53.03.2244		PLCC44p	PLCC-Socket 44p
0	XIC 28	53.03.0166		8p	DIL 0.3", löt, gerade
0	Y 1	89.01.1013		12.500MHz	12.500 000 MHz, HC 49/U
0	Y 2	89.01.1602		11.2896MHz	TCXO Xtal-Oscillator temp comp
0	Y 3	89.01.1601		12.288MHz	TCXO Xtal-Oscillator temp comp
0	Y 4	89.01.1014		12.000MHz	12.000 000 MHz, HC 49/U
0	Y 5	89.01.1002		3.686MHz	3.686 400 MHz, HC 18/U

———————————————— End of List ————————————————

Comments:
(1) 28.05.1998 Improvement of clock jitter:
C5 59.22.5220 L1 62.02.3101

Mado Optical   1.940.530.21

★ Cut pin 16 and connect pin 16 with pin 24 and C4 (VCC)

STUDER
REGENSDORF   D19M MADO Opt.   ESE   1.940.530.21
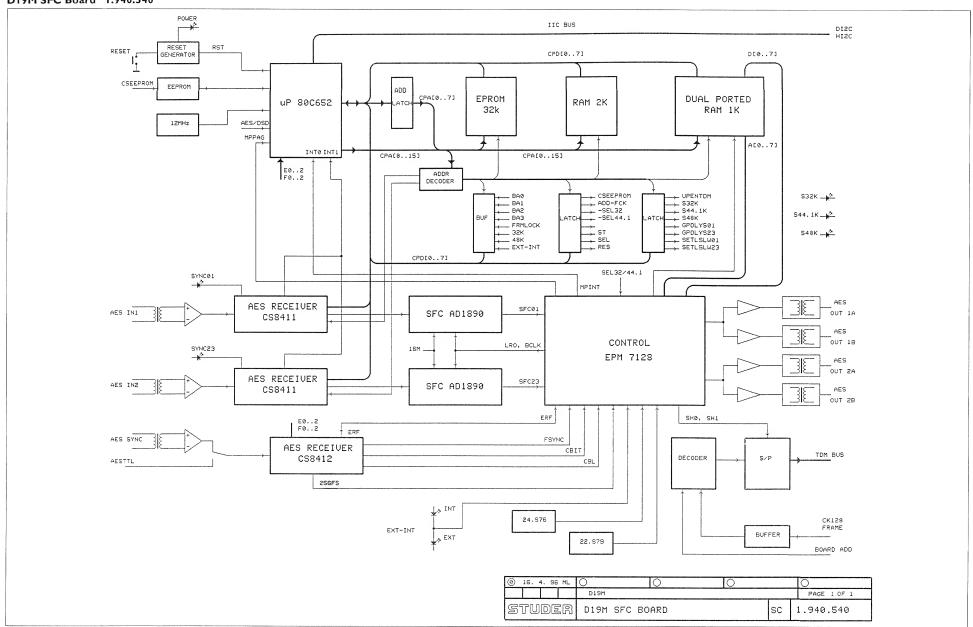
STUDER

Mado Optical 1.940.530.21

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	C 1	not used		47n	PETP, 63V, 10%, RM5
0	C 2	59.34.2390		39p	CER 63V, 5%, N150
0	C 3	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 4	59.06.0683		68n	PETP, 63V, 10%, RM5
1	C 5	59.22.5220		22u	EL 25V, 20%, RM5
0	C 6	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 7	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 8	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 9	59.32.4102		1n	C 1000 P, 20%, 50V, CER
0	C 10	not used		1n	C 1000 P, 20%, 50V, CER
0	C 11	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 12	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 13	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 14	59.34.2390		39p	CER 63V, 5%, N150
0	C 15	59.34.2390		39p	CER 63V, 5%, N150
0	C 16	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 17	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 18	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 19	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 20	59.34.4101		100p	CER 63V, 5%, N750
0	C 21	59.22.3470		47u	EL 10V, 20%, RM5
0	C 22	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 23	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 24	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 25	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 26	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 27	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 28	not used		100n	PETP, 63V, 10%, RM5
0	C 29	not used		100n	PETP, 63V, 10%, RM5
0	C 30	59.32.4102		1n	C 1000 P, 20%, 50V, CER
0	C 31	59.32.4102		1n	C 1000 P, 20%, 50V, CER
0	C 32	59.32.4102		1n	C 1000 P, 20%, 50V, CER
0	C 33	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 34	59.22.6100		10u	EL 35V, 20%, RM5
0	C 35	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 36	59.22.4221		220u	EL 16V, 20%, RM5
0	C 37	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 38	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 39	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 40	59.22.4221		220u	EL 16V, 20%, RM5
0	C 41	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 42	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 43	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 44	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 45	59.22.6100		10u	EL 35V, 20%, RM5
0	C 46	not used		47n	PETP, 63V, 10%, RM5
0	C 47	not used		1n	C 1000 P, 20%, 50V, CER
0	C 48	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 49	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 50	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 51	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 52	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 53	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 54	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 55	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 56	59.34.2270		27p	CER 63V, 5%, N150
0	C 57	59.34.0339		3p3	CER 63V, 5%, P100
0	C 58	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 59	59.22.6100		10u	EL 35V, 20%, RM5
0	C 60	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 61	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 62	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 63	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 64	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 65	59.22.6100		10u	EL 35V, 20%, RM5
0	C 66	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 67	59.34.0339		3p3	CER 63V, 5%, P100
0	C 68	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 69	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 70	not used		1n	C 1000 P, 20%, 50V, CER
0	C 71	59.34.2270		27p	CER 63V, 5%, N150
0	C 72	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 73	not used		1n	C 1000 P, 20%, 50V, CER
0	C 74	59.32.4102		1n	C 1000 P, 20%, 50V, CER
0	D 1	50.04.0127		BAT85	200mA, Schottky
0	D 2	50.04.0127		BAT85	200mA, Schottky
0	D 3	50.04.0127		BAT85	200mA, Schottky
0	D 4	50.04.0127		BAT85	200mA, Schottky
0	D 5	50.04.0127		BAT85	200mA, Schottky
0	D 6	50.04.0125		1N4448	75V, 150mA, 4ns, DO-35
0	D 7	50.04.0125		1N4448	75V, 150mA, 4ns, DO-35
0	DL 1	50.04.2202		HLMP1790	DL HLMP - 1790 GN
0	DL 2	50.04.2202		HLMP1790	DL HLMP - 1790 GN

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	F 1	51.01.0119		1.6A	T 5*20 L 250V
0	IC 1	1.940.946.21			SW 520 MADIOUT (50.14.1501)
0	IC 2	50.13.0203			IC CS 8402-CP ,A
0	IC 3	50.63.4003			IC ATT3030-125, XC3030A-6 ,A
0	IC 4	50.14.1009		CY7C128-35	IC MCM 2018 A - 35 ,A
0	IC 5	50.17.5652		74AC652	IC . 74 AC 652. ,A
0	IC 6	50.13.0202		CS8412	IC CS 8412-CP ,A
0	IC 7	50.17.1574		74HC574	IC ... 74 HC 574., ,A
0	IC 8	89.10.0001			DLT 6000 (LWL - MODUL) ,A
0	IC 9	50.17.1595		74HC595	IC ... 74 HC 595., ,A
0	IC 10	50.11.1002		LM360	High speed Comparator
0	IC 11	1.940.947.20			SW 520 TAXIREG (50.18.0101)
0	IC 12	50.17.1004		74HC04	IC ... 74 HC 04., ,A
0	IC 13	50.10.0124		MAX660	V-Converter ... +5.5V to -5.5V
0	IC 14	50.63.1702		CY7C130	IC CY7C 130 - 45 LC ,A
0	IC 15	50.17.8541		74BCT541	Octal Buffer, tri
0	IC 16	50.17.8574		74BCT574	Octal D-Type FF, tri
0	IC 17	50.17.8574		74BCT574	Octal D-Type FF, tri
0	IC 18	50.15.0121		75174	IC SN 75174 N
0	IC 19	50.17.1594		74HC594	IC ... 74 HC 594., ,A
0	IC 20	50.14.0133		5565	IC HM 6264LP-15 ,A
0	IC 21	1.940.945.20			SW 520 MADO (50.14.2002)
0	IC 22	50.16.0201		SCC2691	IC SCC 2691 AE 1 N 24 ,A
0	IC 23	50.14.2103		HY93C46S	EEPROM 64 * 16, serial
0	IC 24	50.17.0573		74HCT573	IC .. 74 HCT573., ,A
0	IC 25	50.63.0009		80C652	8bit microcontroller
0	IC 26	50.17.1589		74HC589	MC 74 HC 589 N
0	IC 27	50.17.1589		74HC589	MC 74 HC 589 N
0	IC 28	50.15.0114		9637	Dual diff Line Receiver
0	IC 29	50.17.1904		74HCU04	IC ... 74 HCU 04., ,A
0	IC 30	50.11.0159		MAX1232	IC MAX 1232 CPA, DS 1232
1	L 1	62.02.3101		100uH	10%, radial RM 5
0	L 2	62.02.3100		10uH	10%, radial RM 5
0	L 3	62.02.3220		22uH	10%, radial RM 5
0	L 4	62.02.3100		10uH	10%, radial RM 5
0	L 5	62.03.0001			1A Toroid Chocke
0	L 6	62.02.3100		10uH	10%, radial RM 5
0	L 7	62.02.3100		10uH	10%, radial RM 5
0	MP 1	1.940.520.11			D19M MADO PCB
0	MP 2	1.010.057.43			Baugruppenschild
0	MP 3	43.01.0108		Label	ESE-WARNSCHILD
0	MP 4	1.101.001.20		Label	TEXT-ETIK. 5*20 HARDWARE -20
0	MP 5	1.010.117.51			TEXT-ETIK. 5*20 (T1.60A)
0	MP 7	1.010.015.50		Spacer	ISOLIER-SCHEIBE ZU T0 5
0	MP 8	89.01.1499	3 pcs		QUARZ - ISOLIERPLATTE
0	MP 9				FRONTPLATTE
0	MP 10	1.940.530.01	1 pce		FRONTPLATTE
0	MP 11	1.940.600.04	1 pce		GRIFFEINLAGE 4TE
0	MP 12	49.02.0520	2 pcs	M2.5*12	Rändelschraube (Rack)
0	MP 13	49.02.0521	2 pcs		Metall-Buchse (Rack)
0	MP 14	49.02.0522	2 pcs		Kartenhalter (Rack)
0	MP 15	49.02.0523	1 pce	M2.5*7	Senk-Schr, KS, Senkripp
0	MP 16	49.02.0504	1 pce	4TE	Frontplatten-Griff
0	MP 17	21.53.0279	2 pcs		Z - SCHR. IS, ZN, M2.5 * 6
0	MP 18	21.53.0284	1 pce		Z - SCHR. IS, ZN, M2.5 * 16
0	MP 19	28.99.0119	2 pcs		ROHRNIETE D 2.5*0.15* 9
0	P 1	54.11.2009		96p	EU-R 3*32p
0	P 2	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	P 3	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	P 4	54.01.0020		1p	Pin 0.63*0.63
0	P 5	54.01.0020		1p	Pin 0.63*0.63
0	P 6	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	P 7	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	P 8	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	Q 1	50.03.0351		BC327-25	PNP, 800mA
0	Q 2	50.03.0351		BC327-25	PNP, 800mA
0	R 1	57.11.3102		1k0	MF, 1%, 0207
0	R 2	57.11.3103		10k	MF, 1%, 0207
0	R 3	57.11.3103		10k	MF, 1%, 0207
0	R 4	57.11.3103		10k	MF, 1%, 0207
0	R 5	57.11.3103		10k	MF, 1%, 0207
0	R 6	57.11.3150		15R	MF, 1%, 0207
0	R 7	57.11.3271		270R	MF, 1%, 0207
0	R 8	57.11.3150		15R	MF, 1%, 0207
0	R 9	57.11.3271		270R	MF, 1%, 0207
0	R 10	57.11.3102		1k0	MF, 1%, 0207
0	R 11	57.11.3103		10k	MF, 1%, 0207
0	R 12	57.11.3102		1k0	MF, 1%, 0207
0	R 13	57.11.3102		1k0	MF, 1%, 0207
0	R 14	57.11.3102		1k0	MF, 1%, 0207

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	R 15	not used		470R	MF, 1%, 0207
0	R 16	57.11.3102		1k0	MF, 1%, 0207
0	R 17	57.11.3223		22k	MF, 1%, 0207
0	R 18	not used		100R	MF, 1%, 0204
0	R 19	57.11.3102		1k0	MF, 1%, 0207
0	R 20	57.11.3330		33R	MF, 1%, 0207
0	R 21	57.11.3181		180R	MF, 1%, 0207
0	R 22	not used		100R	MF, 1%, 0204
0	R 23	57.11.3223		22k	MF, 1%, 0207
0	R 24	not used		75R	MF, 1%, 0204
0	R 25	not used		75R	MF, 1%, 0204
0	R 26	57.11.3103		10k	MF, 1%, 0207
0	R 27	57.11.3102		1k0	MF, 1%, 0207
0	R 28	57.11.3102		1k0	MF, 1%, 0207
0	R 29	57.11.3222		2k2	MF, 1%, 0207
0	R 30	57.11.3222		2k2	MF, 1%, 0207
0	R 31	57.11.3102		1k0	MF, 1%, 0207
0	R 32	57.11.3103		10k	MF, 1%, 0207
0	R 33	57.11.3103		10k	MF, 1%, 0207
0	R 34	57.11.3103		10k	MF, 1%, 0207
0	R 35	57.11.3102		1k0	MF, 1%, 0207
0	R 36	57.11.3105		1M0	MF, 1%, 0207
0	R 37	57.11.3561		560R	MF, 1%, 0207
0	R 38	57.11.3473		47k	MF, 1%, 0207
0	R 39	57.11.3103		10k	MF, 1%, 0207
0	R 40	57.11.3473		47k	MF, 1%, 0207
0	R 41	57.11.3561		560R	MF, 1%, 0207
0	RZ 1	57.88.4102		8*1k	2%, SIP 9
0	RZ 2	57.88.4102		8*1k	2%, SIP 9
0	RZ 3	57.88.4102		8*1k	2%, SIP 9
0	RZ 4	57.88.4102		8*1k	2%, SIP 9
0	RZ 5	57.88.4102		8*1k	2%, SIP 9
0	RZ 6	57.88.4333		8*33k	2%, SIP 9
0	S 1	55.11.0202		SPST	Toggle on - none - on
0	S 2	55.03.0122		1*a	S 1 TASTE, 1*A, PRINT, IMPULS
0	T 1	63.15.0021			RF - Trafo
0	T 2	63.15.0021			RF - Trafo
0	T 3	not used			IMPULSTRANSFORMATOR
0	W 1	1.010.324.64		Wire	DRAHTBRUECKE U, 4.3*10.2, 0.6
0	W 2	1.010.324.64		Wire	DRAHTBRUECKE U, 4.3*10.2, 0.6
0	XDL 1	50.20.2501		Spacer	LED-Sockel
0	XDL 2	50.20.2501		Spacer	LED-Sockel
0	XF 1	53.03.0118			XF 5 * 20, PRINT-LIEGEND
0	XIC 1	53.03.0166		8p	DIL 0.3", löt, gerade
0	XIC 3	53.03.2284		PLCC84p	PLCC-Socket 84p
0	XIC 11	53.03.0182		24p	DIL 0.3", löt, gerade
0	XIC 14	53.03.2252		PLCC52p	PLCC-Socket 52p
0	XIC 15	53.03.0165		20p	DIL 0.3", löt, gerade
0	XIC 16	53.03.0165		20p	DIL 0.3", löt, gerade
0	XIC 17	53.03.0165		20p	DIL 0.3", löt, gerade
0	XIC 18	53.03.0168		16p	DIL 0.3", löt, gerade
0	XIC 21	53.03.0173		28p	DIL 0.6", löt, gerade
0	XIC 25	53.03.2244		PLCC44p	PLCC-Socket 44p
0	XIC 28	53.03.0166		8p	DIL 0.3", löt, gerade
0	Y 1	89.01.1013		12.500MHz	12.500 000 MHz, HC 49/U
0	Y 2	89.01.1602		11.2896MHz	TCXO Xtal-Oscillator temp comp
0	Y 3	89.01.1601		12.288MHz	TCXO Xtal-Oscillator temp comp
0	Y 4	89.01.1014		12.000MHz	12.000 000 MHz, HC 49/U
0	Y 5	89.01.1002		3.686MHz	3.686 400 MHz, HC 18/U

———————————— End of List ————————————

Comments:
new software 1.940.947-20 to -21
(1) 28.05.1998 Improvement of clock jitter:
C5 59.22.5220 L1 62.02.2101

Block Diagram
D19M SFC Board   1.940.540
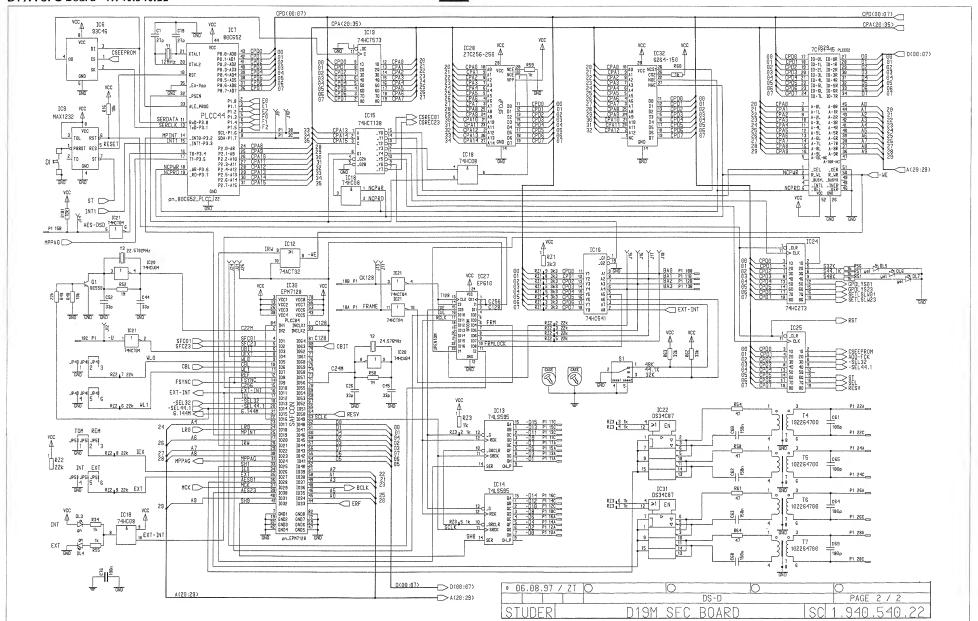
D19M SFC Board   1.940.540.22
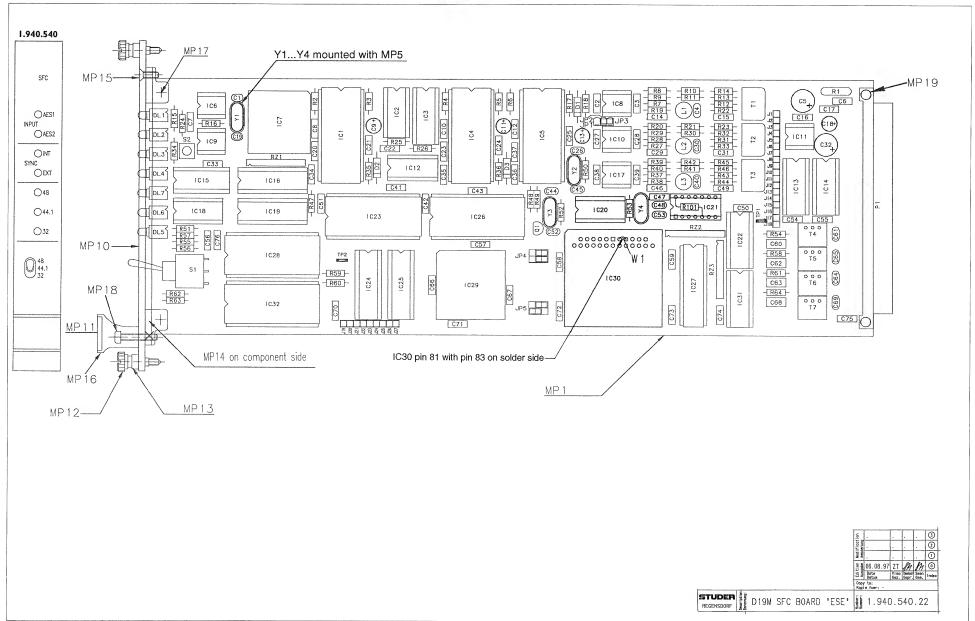
STUDER

D19M SFC Board 1.940.540.22

D19M SFC Board   1.940.540.22

1.940.540

SFC

INPUT
○ AES1
○ AES2

SYNC
○ INT
○ EXT

○ 48
○ 44.1
○ 32

MP 17

MP 15

Y1...Y4 mounted with MP5

MP 19

MP 10

MP 18

MP 11

MP 16

MP 12

MP 13

MP14 on component side

IC30 pin 81 with pin 83 on solder side

MP 1

Edition Ausgabe	Modification Änderung				③
					②
					①
Edition Ausgabe	06.08.97	ZT			⓪
	Date Datum	Visa Gez.	Desked Gepr.	Seen Ges.	Index
Copy to: Kopie fuer:					

STUDER REGENSDORF | Description Benennung: D19M SFC BOARD 'ESE' | Number Nummer: 1.940.540.22

STUDER

D19M SFC Board 1.940.540.22

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	C 1	59.34.2270		27p	CER 63V, 5%, N150
0	C 2	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 3	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 4	59.34.4101		100p	CER 63V, 5%, N750
0	C 5	59.22.4101		100u	EL 16V, 20%, RM5
0	C 6	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 7	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 8	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 9	59.22.8109		1u	EL 50V, 20%, RM5
0	C 10	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 11	59.22.8109		1u	EL 50V, 20%, RM5
0	C 12	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 13	59.22.8109		1u	EL 50V, 20%, RM5
0	C 14	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 15	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 16	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 17	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 18	59.22.3470		47u	EL 10V, 20%, RM5
0	C 19	59.34.2270		27p	CER 63V, 5%, N150
0	C 20	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 21	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 22	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 23	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 24	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 25	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 26	59.34.2330		33p	CER 63V, 5%, N150
0	C 27	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 28	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 29	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 30	59.34.4101		100p	CER 63V, 5%, N750
0	C 31	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 32	59.22.4101		100u	EL 16V, 20%, RM5
0	C 33	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 34	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 35	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 36	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 37	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 38	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 39	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 40	59.34.4101		100p	CER 63V, 5%, N750
0	C 41	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 42	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 43	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 44	59.34.2330		33p	CER 63V, 5%, N150
0	C 45	59.34.2330		33p	CER 63V, 5%, N150
0	C 46	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 47	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 48	59.34.2330		33p	CER 63V, 5%, N150
0	C 49	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 50	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 51	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 52	59.34.2330		33p	CER 63V, 5%, N150
0	C 53	59.34.2330		33p	CER 63V, 5%, N150
0	C 54	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 55	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 56	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 57	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 58	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 59	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 60	59.06.0154		150n	PETP, 63V, 10%, RM5
0	C 61	59.34.4101		100p	CER 63V, 5%, N750
0	C 62	59.06.0154		150n	PETP, 63V, 10%, RM5
0	C 63	59.06.0154		150n	PETP, 63V, 10%, RM5
0	C 64	59.34.4101		100p	CER 63V, 5%, N750
0	C 65	59.34.4101		100p	CER 63V, 5%, N750
0	C 66	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 67	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 68	59.06.0154		150n	PETP, 63V, 10%, RM5
0	C 69	59.34.4101		100p	CER 63V, 5%, N750
0	C 70	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 71	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 72	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 73	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 74	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 75	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 76	59.06.0104		100n	PETP, 63V, 10%, RM5
0	D 1	50.04.0134		1N3595	D 1N 3595, FDH 300,
0	D 2	50.04.0134		1N3595	D 1N 3595, FDH 300,
0	D 3	50.04.0134		1N3595	D 1N 3595, FDH 300,
0	DL 1	50.04.2751		grn	LED mit Halter, grün
0	DL 2	50.04.2751		grn	LED mit Halter, grün
0	DL 3	50.04.2751		grn	LED mit Halter, grün
0	DL 4	50.04.2751		grn	LED mit Halter, grün
0	DL 5	50.04.2752		yel	LED mit Halter, gelb
0	DL 6	50.04.2752		yel	LED mit Halter, gelb
0	DL 7	50.04.2752		yel	LED mit Halter, gelb
0	IC 1	50.13.0201		CS8411	AES/EBU Receiver
0	IC 2	50.17.0000		74HCT00	IC .. 74 HCT 00 ., ,A
0	IC 3	50.17.1153		74HC153	IC ... 74 HC 153 ., ,A
0	IC 4	50.13.0201		CS8411	AES/EBU Receiver
0	IC 5	50.13.0202		CS8412	IC CS 8412-CP ,A
0	IC 6	50.14.2103		HY93C46S	EEPROM 64 * 16, serial
0	IC 7	50.63.0009		80C652	8bit microcontroller
0	IC 8	50.11.1002		LM360	High speed Comparator
0	IC 9	50.11.0159		MAX1232	IC MAX 1232 CPA, DS 1232
0	IC 10	50.11.1002		LM360	High speed Comparator
0	IC 11	50.10.0124		MAX690	V-Converter ...+5.5V to -5.5V
0	IC 12	50.17.7032		ACT32	.. 74 ACT 32 .,
0	IC 13	50.06.0595		74LS595	IC SN 74 LS 595 N
0	IC 14	50.06.0595		74LS595	IC SN 74 LS 595 N
0	IC 15	50.17.0138		74HCT138	IC .. 74 HCT 138 ., ,A
0	IC 16	50.17.1541		74HC541	IC ... 74 HC 541 ., ,A
0	IC 17	50.11.1002		LM360	High speed Comparator
0	IC 18	50.17.1006		74HC08	IC ... 74 HC 08 ., ,A
0	IC 19	50.17.0573		74HCT573	IC .. 74 HCT573 ., ,A
0	IC 20	50.17.1904		74HCU04	IC ... 74 HCU 04 ., ,A
0	IC 21	50.17.0004		74HCT04	IC .. 74 HCT 04 ., ,A
0	IC 22	50.16.0127		34C87	IC DS 34 C 87 TN, MC34C87P ,A
0	IC 23	50.13.0204			IC AD 1890 JN ,A
0	IC 24	50.17.1273		74HC273	IC ... 74 HC 273 ., ,A
0	IC 25	50.17.1273		74HC273	IC ... 74 HC 273 ., ,A
0	IC 26	50.13.0204			IC AD 1890 JN ,A
0	IC 27	1.940.951.21			SW 540 SFCCON (50.18.0104)
0	IC 28	1.940.952.21			SW 540 SFCUP (50.14.2004)
0	IC 29	50.63.1702		CY7C130	IC CY7C 130 - 45 LC ,A
0	IC 30	1.940.950.22			SW 540 SAFCON (50.63.4205)
0	IC 31	50.15.0127		34C87	IC DS 34 C 87 TN, MC34C87P ,A
0	IC 32	50.14.0133		5565	IC HM 6264LP-15 ,A
0	J 1	53.03.0219			single-in-line
0	J 2	53.03.0219			single-in-line
0	J 3	53.03.0219			single-in-line
0	J 4	53.03.0219			single-in-line
0	J 5	53.03.0219			single-in-line
0	J 6	53.03.0219			single-in-line
0	J 7	53.03.0219			single-in-line
0	J 8	53.03.0219			single-in-line
0	J 9	53.03.0219			single-in-line
0	J 10	53.03.0219			single-in-line
0	J 11	53.03.0219			single-in-line
0	J 12	53.03.0219			single-in-line
0	J 13	53.03.0219			single-in-line
0	J 14	53.03.0219			single-in-line
0	J 15	53.03.0219			single-in-line
0	J 16	53.03.0219			single-in-line
0	J 17	53.03.0219			single-in-line
0	J 18	53.03.0219			single-in-line
0	J 19	53.03.0219			single-in-line
0	J 20	53.03.0219			single-in-line
0	J 21	53.03.0219			single-in-line
0	J 22	53.03.0219			single-in-line
0	J 23	53.03.0219			single-in-line
0	J 24	53.03.0219			single-in-line
0	J 25	53.03.0219			single-in-line
0	J 26	53.03.0219			single-in-line
0	J 27	53.03.0219			single-in-line
0	J 28	54.01.0021		Jumper	0.63 * 0.63mm
0	J 29	54.01.0021		Jumper	0.63 * 0.63mm
0	J 30	54.01.0021		Jumper	0.63 * 0.63mm
0	J 31	54.01.0021		Jumper	0.63 * 0.63mm
0	J 32	54.01.0021		Jumper	0.63 * 0.63mm
0	JP 1	54.01.0020		1p	Pin 0.63*0.63
0	JP 2	54.01.0020		1p	Pin 0.63*0.63
0	JP 3	54.01.0020		1p	Pin 0.63*0.63
0	JP 4	54.11.0136		2*3p	Pin 0.63*0.63, RM2.54
0	JP 5	54.11.0136		2*3p	Pin 0.63*0.63, RM2.54
0	L 1	62.02.3220		22uH	10%, radial RM 5
0	L 2	62.02.3220		22uH	10%, radial RM 5
0	L 3	62.02.3220		22uH	10%, radial RM 5
0	MP 1	1.940.540.11			D19M SFC PCB
0	MP 2	1.010.057.43			Baugruppenschild
0	MP 3	43.01.0108		Label	ESE-WARNSCHILD
0	MP 4	1.101.001.22			TEXT-ETIK. 5*20 HARDWARE -22
0	MP 5	89.01.1499	4 pcs		QUARZ - ISOLIERPLATTE
0	MP 10	1.940.540.01	1 pce		FRONTPLATTE
0	MP 11	1.940.600.04	1 pce		GRIFFEINLAGE 4TE
0	MP 12	49.02.0520	2 pcs	M2.5*12	Rändelschraube (Rack)
0	MP 13	49.02.0521	2 pcs		Metall-Buchse (Rack)
0	MP 14	49.02.0522	2 pcs		Kartenhalter (Rack)
0	MP 15	49.02.0523	1 pce	M2.5*7	Senk-Schr, KS, Senkripp
0	MP 16	49.02.0504	1 pce	4TE	Frontplatten-Griff
0	MP 17	21.53.0279	2 pcs		Z - SCHR. IS , ZN , M2.5 * 6
0	MP 18	21.53.0284	1 pce		Z - SCHR. IS , ZN , M2.5 * 16
0	MP 19	28.99.0119	2 pcs		ROHRNIETE D 2.5*0.15* 9
0	P 1	54.11.2009		96p	EU-R 3*32p
0	Q 1	50.03.0407		BC550C	BC 550 C
0	R 1	57.92.7053		1.6A	POLY- PTC, 30V
0	R 2	57.11.3823		82k	MF, 1%, 0207
0	R 3	57.11.3470		47R	MF, 1%, 0207
0	R 4	57.11.3823		82k	MF, 1%, 0207
0	R 5	57.11.3470		47R	MF, 1%, 0207
0	R 6	57.11.3823		82k	MF, 1%, 0207
0	R 7	57.11.3103		10k	MF, 1%, 0207
0	R 8	57.11.3103		10k	MF, 1%, 0207
0	R 9	57.11.3103		10k	MF, 1%, 0207
0	R 10	57.11.3471		470R	MF, 1%, 0207
0	R 11	not used		470R	MF, 1%, 0207
0	R 12	57.11.3150		15R	MF, 1%, 0207
0	R 13	57.11.3150		15R	MF, 1%, 0207
0	R 14	57.11.3471		270R	MF, 1%, 0207
0	R 15	57.11.3102		1k0	MF, 1%, 0207
0	R 16	57.11.3103		10k	MF, 1%, 0207
0	R 17	57.11.3102		1k0	MF, 1%, 0207
0	R 18	57.11.3470		47R	MF, 1%, 0207
0	R 19	57.11.3103		10k	MF, 1%, 0207
0	R 20	57.11.3103		10k	MF, 1%, 0207
0	R 21	57.11.3471		470R	MF, 1%, 0207
0	R 22	57.11.3271		270R	MF, 1%, 0207
0	R 23	57.11.3271		270R	MF, 1%, 0207
0	R 24	57.11.3102		1k0	MF, 1%, 0207
0	R 25	57.11.3332		3k3	MF, 1%, 0207
0	R 26	57.11.3332		3k3	MF, 1%, 0207
0	R 27	57.11.3103		10k	MF, 1%, 0207
0	R 28	57.11.3103		10k	MF, 1%, 0207
0	R 29	57.11.3103		10k	MF, 1%, 0207
0	R 30	not used		470R	MF, 1%, 0207
0	R 31	57.11.3150		15R	MF, 1%, 0207
0	R 32	57.11.3150		15R	MF, 1%, 0207
0	R 33	57.11.3271		270R	MF, 1%, 0207
0	R 34	57.11.3102		1k0	MF, 1%, 0207
0	R 35	57.11.3102		1k0	MF, 1%, 0207
0	R 36	57.11.3102		1k0	MF, 1%, 0207
0	R 37	57.11.3103		10k	MF, 1%, 0207
0	R 38	57.11.3103		10k	MF, 1%, 0207
0	R 39	57.11.3103		10k	MF, 1%, 0207
0	R 40	57.11.3103		10k	MF, 1%, 0207
0	R 41	not used		470R	MF, 1%, 0207
0	R 42	57.11.3471		470R	MF, 1%, 0207
0	R 43	57.11.3150		15R	MF, 1%, 0207
0	R 44	57.11.3271		270R	MF, 1%, 0207
0	R 45	57.11.3271		270R	MF, 1%, 0207
0	R 46	57.11.3150		15R	MF, 1%, 0207
0	R 47	57.11.3472		4k7	MF, 1%, 0207
0	R 48	57.11.3103		10k	MF, 1%, 0207
0	R 49	57.11.3223		22k	MF, 1%, 0207
0	R 50	57.11.3105		1M0	MF, 1%, 0207
0	R 51	57.11.3102		1k0	MF, 1%, 0207
0	R 52	57.11.3105		1M0	MF, 1%, 0207
0	R 53	57.11.3105		1M0	MF, 1%, 0207
0	R 54	57.11.3470		47R	MF, 1%, 0207
0	R 55	57.11.3102		1k0	MF, 1%, 0207
0	R 56	57.11.3102		1k0	MF, 1%, 0207
0	R 57	57.11.3102		1k0	MF, 1%, 0207
0	R 58	57.11.3470		47R	MF, 1%, 0207
0	R 59	57.11.3102		1k0	MF, 1%, 0207
0	R 60	57.11.3102		1k0	MF, 1%, 0207
0	R 61	57.11.3470		47R	MF, 1%, 0207
0	R 62	57.11.3333		33k	MF, 1%, 0207
0	R 63	57.11.3333		33k	MF, 1%, 0207
0	R 64	57.11.3470		47R	MF, 1%, 0207
0	R 101	57.11.3103		10k	MF, 1%, 0207
0	RZ 1	57.88.4332		8*3k3	2%, SIP 9
0	RZ 2	57.88.4223		8*22k	2%, SIP 9
0	RZ 3	57.88.4102		8*1k	2%, SIP 9
0	S 1	55.11.0203		SPST	Toggle on - off - on
0	S 2	55.15.0138		1*A	S 1 TASTE, 1*A,IMPULS,1.0 N
0	T 1	63.15.0001			IMPULSTRANSFORMATOR
0	T 2	63.15.0001			IMPULSTRANSFORMATOR
0	T 3	63.15.0001			IMPULSTRANSFORMATOR
0	T 4	1.022.647.00		1:1.4	OUTPUT TRAFO AES/EBU
0	T 5	1.022.647.00		1:1.4	OUTPUT TRAFO AES/EBU
0	T 6	1.022.647.00		1:1.4	OUTPUT TRAFO AES/EBU
0	T 7	1.022.647.00		1:1.4	OUTPUT TRAFO AES/EBU
0	TP 1	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	TP 2	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	W 1	64.01.0106	3 mm		SCHALTDRAHT SN D 0.6
0	XIC 7	53.03.2244		PLCC44p	PLCC-Socket 44p
0	XIC 13	53.03.0168		16p	DIL 0.3", löt, gerade
0	XIC 14	53.03.0168		16p	DIL 0.3", löt, gerade
0	XIC 22	53.03.0168		16p	DIL 0.3", löt, gerade
0	XIC 27	53.03.0182		24p	DIL 0.3", löt, gerade
0	XIC 28	53.03.0173		28p	DIL 0.6", löt, gerade
0	XIC 29	53.03.2252		PLCC52p	PLCC-Socket 52p
0	XIC 30	53.03.2284		PLCC84p	PLCC-Socket 84p
0	XIC 31	53.03.0168		16p	DIL 0.3", löt, gerade
0	Y 1	89.01.1014		12.000MHz	12.000 000 MHz, HC 49/U
0	Y 2	89.01.1010		24.576MHz	24.576 000 MHz, HC 18/U
0	Y 3	89.01.1012		22.5792MHz	22.579 200 MHz, HC 49/U
0	Y 4	89.01.1009		16.000MHz	16.000 000 MHz, HC 49/U

——————— End of List ———————

Comments:
IC Sockel XIC nn entsprechend den IC Nurnmern bestückt

STUDER

D19M 24 Bit AD Board   1.940.562.20
D19M 24 Bit AD / ND Board   1.940.563.20

CHANNEL1

INPUT LEVEL
15dbu
21dbu
0...26dbu

CHANNEL2

INPUT LEVEL
15dbu
21dbu
0...26dbu

IC104
AK5392

AGND	VA	VD	DGND
BGND			
VCOML			TEST
AINL+			ZCAL
AINL-			IRST
			CAL / NC
VREFL			CMODE
GNDL			SMODE1
GNDR			SMODE2
VREFR			HPFE
AINR+			MCLK
AINR-			SCLK
VCOMR			FSYNC / LRCK
			SDATA

IRST
ICLKO
ADBCL
FSYNC
AO01

+5VA   VCC

+15V   IC9 LM317T   +5VA

+15V   +15V   +15V   +15V   +15V

IC101   IC102   IC103   IC201   IC202

-15V   -15V   -15V   -15V   -15V

0	03.09.98	ZT					PAGE 1 OF 5
				D19M		1.940.562.20
STUDER	D19M 24BIT AD NS BOARD	SC	1.940.563.20

D19M 24BIT AD BOARD

STUDER

CHANNEL 3

CHANNEL 4

θ	03.09.98	ZT	○		○		○		○	
					D19M				PAGE 2 OF 5	

STUDER | D19M 24BIT AD NS BOARD | D19M 24BIT AD BOARD | SC | 1.940.562.20
1.940.563.20

D19M 24 Bit AD Board   1.940.562.20
D19M 24 Bit AD / ND Board   1.940.563.20

STUDER

D19M 24 Bit AD Board   1.940.562.20
D19M 24 Bit AD / ND Board   1.940.563.20

CK128   J1 18B

FRAME   J1 18A

AES_DS-D   J1 15B

CH1/2

CH3/4

CH1/2

CH3/4

IC14
EPM7128

IC17
29F010

IC16
MCM2018A

IC12
74LS595

IC11
74LS595

IC4
DS34C87

IC5
DS34C87

IC15
74ACT14

MICADOR

ADBUS(0:3)

| 03.09.98 | ZT | | | | | PAGE 4 OF 5 |

D19M
D19M 24BIT AD BOARD
STUDER D19M 24BIT AD NS BOARD   SC   1.940.562.20   1.940.563.20

D19M 24 Bit AD Board   1.940.562.20
D19M 24 Bit AD / ND Board   1.940.563.20

STUDER

D19M 24 Bit AD Board 1.940.562.20
D19M 24 Bit AD / ND Board 1.940.563.20

MP17

MP15

MP19

MP10

MP18

MP11

MP16

MP12   MP13

MP14 auf Bestueckungsseite montiert

MP20

MP1

L1 und L2 nach BV640 bestueckt

DL1,DL3,DL7

DL2,DL4,DL8

DL9,DL10

| | STUDER | | D19M C4 AD BOARD 'ESE' | 1.940.562.20 | |
| | REGENSDORF | | D19M C4 AD NS BOARD 'ESE' | 1.940.563.20 | |

DI9M 24 Bit AD Board 1.940.562.20

Idx	Pos.	Part No.	Qty.	Type/Val.	Description	Idx	Pos.	Part No.	Qty.	Type/Val.	Description
0	C 1	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 207	59.60.2233		22p	CER 50V, 5%, C0G, 0603
0	C 2	59.60.3325		10n	CER 50V, 10%, X7R, 0805	0	C 208	59.05.1221		220p	PP, 1%, 630V
0	C 3	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 209	59.60.2233		22p	CER 50V, 5%, C0G, 0603
0	C 4	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 210	59.68.0067		22u	C-EL 16V, 5.0*5.7
0	C 5	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 211	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 6	59.60.3325		10n	CER 50V, 10%, X7R, 0805	0	C 212	59.60.3315		1n5	CER 50V, 10%, X7R, 0805
0	C 7	59.60.3333		47n	CER 50V, 10%, X7R, 0805	0	C 213	59.60.2257		220p	CER 50V, 5%, C0G, 0603
0	C 8	59.68.0111		22u	C-EL 35V, 6.3*5.7	0	C 214	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 9	59.60.3325		10n	CER 50V, 10%, X7R, 0805	0	C 215	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 10	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 216	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 11	59.60.2237		33p	CER 50V, 5%, C0G, 0603	0	C 217	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 12	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 301	59.60.2257		220p	CER 50V, 5%, C0G, 0603
0	C 13	59.60.2237		33p	CER 50V, 5%, C0G, 0603	0	C 302	59.60.2257		220p	CER 50V, 5%, C0G, 0603
0	C 14	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 303	59.68.0027		47u	C-EL 6V, 5.0*5.7
0	C 15	59.60.2249		100p	CER 50V, 5%, C0G, 0603	0	C 304	59.05.1221		220p	PP, 1%, 630V
0	C 16	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 305	59.60.3317		2n2	CER 50V, 10%, X7R, 0805
0	C 17	59.60.2249		100p	CER 50V, 5%, C0G, 0603	0	C 306	59.68.0073		220u	C-EL 16V, 8.0*10.7
0	C 18	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 307	59.60.2233		22p	CER 50V, 5%, C0G, 0603
0	C 19	59.68.0067		22u	C-EL 16V, 5.0*5.7	0	C 308	59.05.1221		220p	PP, 1%, 630V
0	C 20	59.68.0111		22u	C-EL 35V, 6.3*5.7	0	C 309	59.60.2233		22p	CER 50V, 5%, C0G, 0603
0	C 21	59.60.2237		33p	CER 50V, 5%, C0G, 0603	0	C 310	59.68.0067		22u	C-EL 16V, 5.0*5.7
0	C 22	59.60.2237		33p	CER 50V, 5%, C0G, 0603	0	C 311	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 23	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 312	59.60.3315		1n5	CER 50V, 10%, X7R, 0805
0	C 24	59.60.2249		100p	CER 50V, 5%, C0G, 0603	0	C 313	59.60.2257		220p	CER 50V, 5%, C0G, 0603
0	C 25	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 314	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 26	59.60.2249		100p	CER 50V, 5%, C0G, 0603	0	C 315	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 27	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 316	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 28	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 317	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 29	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 318	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 30	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 319	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 31	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 320	59.68.0067		22u	C-EL 16V, 5.0*5.7
0	C 32	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 321	59.68.0065		10u	C-EL 16V, 4.0*5.7
0	C 33	59.68.0111		22u	C-EL 35V, 6.3*5.7	0	C 322	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 34	59.68.0067		22u	C-EL 16V, 5.0*5.7	0	C 323	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 35	59.68.0065		10u	C-EL 16V, 4.0*5.7	0	C 324	59.60.3441		220n	CER 50V, 10%, X7R, 1206
0	C 36	not used		100n	CER 50V, 10%, X7R, 0805	0	C 325	59.68.0065		10u	C-EL 16V, 4.0*5.7
0	C 37	not used		470n	CER 50V, 10%, X7R, 2220	0	C 326	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 38	59.68.0067		22u	C-EL 16V, 5.0*5.7	0	C 327	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 39	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 328	59.68.0065		10u	C-EL 16V, 4.0*5.7
0	C 40	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 329	59.60.3441		220n	CER 50V, 10%, X7R, 1206
0	C 41	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 401	59.60.2257		220p	CER 50V, 5%, C0G, 0603
0	C 42	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 402	59.60.2257		220p	CER 50V, 5%, C0G, 0603
0	C 43	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 403	59.68.0027		47u	C-EL 6V, 5.0*5.7
0	C 44	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 404	59.05.1221		220p	PP, 1%, 630V
0	C 45	59.68.0107		4u7	C-EL 35V, 4.0*5.7	0	C 405	59.60.3317		2n2	CER 50V, 10%, X7R, 0805
0	C 46	59.68.0111		22u	C-EL 35V, 6.3*5.7	0	C 406	59.68.0073		220u	C-EL 16V, 8.0*10.7
0	C 47	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 407	59.60.2233		22p	CER 50V, 5%, C0G, 0603
0	C 48	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 408	59.05.1221		220p	PP, 1%, 630V
0	C 49	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 409	59.60.2233		22p	CER 50V, 5%, C0G, 0603
0	C 50	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 410	59.68.0067		22u	C-EL 16V, 5.0*5.7
0	C 51	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	C 411	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 101	59.60.2257		220p	CER 50V, 5%, C0G, 0603	0	C 412	59.60.3315		1n5	CER 50V, 10%, X7R, 0805
0	C 102	59.60.2257		220p	CER 50V, 5%, C0G, 0603	0	C 413	59.60.2257		220p	CER 50V, 5%, C0G, 0603
0	C 103	59.68.0027		47u	C-EL 6V, 5.0*5.7	0	C 414	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 104	59.05.1221		220p	PP, 1%, 630V	0	C 415	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 105	59.60.3317		2n2	CER 50V, 10%, X7R, 0805	0	C 416	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 106	59.68.0073		220u	C-EL 16V, 8.0*10.7	0	C 417	59.60.3337		100n	CER 50V, 10%, X7R, 0805
0	C 107	59.60.2233		22p	CER 50V, 5%, C0G, 0603						
0	C 108	59.05.1221		220p	PP, 1%, 630V	0	D 1	50.60.8001		4448	200mA 75V 4ns SOD 80
0	C 109	59.60.2233		22p	CER 50V, 5%, C0G, 0603	0	D 2	not used		BAS85	200mA 30V Schottky SOD 80
0	C 110	59.68.0067		22u	C-EL 16V, 5.0*5.7	0	D 3	not used		BAS85	200mA 30V Schottky SOD 80
0	C 111	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	D 4	50.60.8001		4448	200mA 75V 4ns SOD 80
0	C 112	59.60.3315		1n5	CER 50V, 10%, X7R, 0805	0	D 5	50.60.8101		BAS85	200mA 30V Schottky SOD 80
0	C 113	59.60.2257		220p	CER 50V, 5%, C0G, 0603	0	D 6	50.60.8101		BAS85	200mA 30V Schottky SOD 80
0	C 114	59.60.3337		100n	CER 50V, 10%, X7R, 0805						
0	C 115	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	DL 1	50.04.2200		HLMP1700	DL HLMP - 1700 RT
0	C 116	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	DL 2	50.04.2200		HLMP1700	DL HLMP - 1700 RT
0	C 117	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	DL 3	not used		HLMP1700	DL HLMP - 1700 RT
0	C 118	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	DL 4	not used		HLMP1700	DL HLMP - 1700 RT
0	C 119	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	DL 5	50.04.2200		HLMP1700	DL HLMP - 1700 RT
0	C 120	59.68.0067		22u	C-EL 16V, 5.0*5.7	0	DL 6	50.04.2200		HLMP1700	DL HLMP - 1700 RT
0	C 121	59.68.0065		10u	C-EL 16V, 4.0*5.7	0	DL 7	not used		HLMP1719	DL HLMP - 1719 GB
0	C 122	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	DL 8	not used		HLMP1790	DL HLMP - 1790 GN
0	C 123	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	DL 9	50.04.2202		HLMP1790	DL HLMP - 1790 GN
0	C 124	59.60.3441		220n	CER 50V, 10%, X7R, 1206	0	DL 10	50.04.2202		HLMP1790	DL HLMP - 1790 GN
0	C 125	59.68.0065		10u	C-EL 16V, 4.0*5.7						
0	C 126	59.60.3337		100n	CER 50V, 10%, X7R, 0805	0	DZ 1	50.60.9026		24V	5%, 0.2W, SOT 23
0	C 127	59.60.3337		100n	CER 50V, 10%, X7R, 0805						
0	C 128	59.68.0065		10u	C-EL 16V, 4.0*5.7	0	IC 1	50.62.1423		74HC423	Dual multivibr monost retrigg
0	C 129	59.60.3441		220n	CER 50V, 10%, X7R, 1206	0	IC 2	50.62.0913		CS8412	AES-Receiver
0	C 201	59.60.2257		220p	CER 50V, 5%, C0G, 0603	0	IC 3	50.62.1904		74HCU04	Hex inverter unbuffered
0	C 202	59.60.2257		220p	CER 50V, 5%, C0G, 0603	0	IC 4	50.15.0127		34C87	IC DS 34 C 87 TN, MC34C87P ,A
0	C 203	59.68.0027		47u	C-EL 6V, 5.0*5.7	0	IC 5	50.15.0127		34C87	IC DS 34 C 87 TN, MC34C87P ,A
0	C 204	59.05.1221		220p	PP, 1%, 630V	0	IC 6	50.62.1153		74HC153	Dual 4ch multiplexer
0	C 205	59.60.3317		2n2	CER 50V, 10%, X7R, 0805	0	IC 7	50.15.0128		34C86	IC DS 34 C 86 TN, MC34C86P ,A
0	C 206	59.68.0073		220u	C-EL 16V, 8.0*10.7	0	IC 8	not used		LM393	Dual voltage comp. SO 8
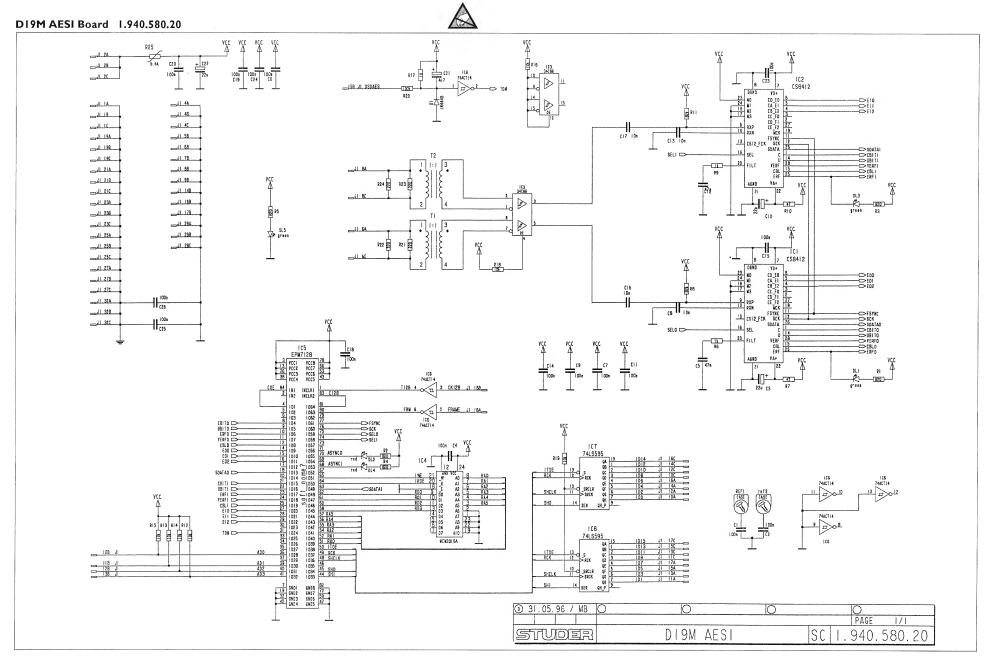
STUDER

D19M 24 Bit AD Board   1.940.562.20

Idx	Pos.	Part No.	Qty.	Type/Val.	Description	Idx	Pos.	Part No.	Qty.	Type/Val.	Description
0	IC 9	50.10.0104		LM317SP	IC LM 317 SP, ..T,	0	R 5	57.60.1333		33K	MF, 1%, 0204, E24
0	IC 10	not used		56004	DSP 56 004 40MHz	0	R 6	57.60.1220		22R	MF, 1%, 0204, E24
0	IC 11	50.06.0595		74LS595	IC SN 74 LS 595 N	0	R 7	57.60.1102		1K	MF, 1%, 0204, E24
0	IC 12	50.06.0595		74LS595	IC SN 74 LS 595 N	0	R 8	57.60.1102		1K	MF, 1%, 0204, E24
0	IC 13	not used		29F010	Flash Memory 128K*8	0	R 9	57.60.1220		22R	MF, 1%, 0204, E24
0	IC 14	1.940.949.20			SW 562 MICADOR (50.63.4205)	0	R 10	57.60.1823		82K	MF, 1%, 0204, E24
0	IC 15	50.62.6014		74ACT 14	Hex inverting Schmitt trigger	0	R 11	57.60.1105		1M	MF, 1%, 0204, E24
0	IC 16	50.14.1009		7C128A	SRAM 2K*8 35ns	0	R 12	57.60.1222		2K2	MF, 1%, 0204, E24
0	IC 17	1.940.948.20			SW 562 ADCBIT 24 (50.63.1303)	0	R 13	57.60.1220		22R	MF, 1%, 0204, E24
0	IC 101	50.61.0204		MC33078	Dual Op-Amp low noise	0	R 14	57.60.1270		27R	MF, 1%, 0204, E24
0	IC 102	50.61.0204		MC33078	Dual Op-Amp low noise	0	R 15	57.60.1270		27R	MF, 1%, 0204, E24
0	IC 103	50.61.0204		MC33078	Dual Op-Amp low noise	0	R 16	57.92.7053		1.6A	POLY- PTC, 30V
0	IC 104	50.61.8105		AK5392	Delta Sigma 24bit ADConv SOP28	0	R 17	57.60.1102		1K	MF, 1%, 0204, E24
0	IC 201	50.61.0204		MC33078	Dual Op-Amp low noise	0	R 18	57.60.1102		1K	MF, 1%, 0204, E24
0	IC 202	50.61.0204		MC33078	Dual Op-Amp low noise	0	R 19	57.60.1103		10K	MF, 1%, 0204, E24
0	IC 301	50.61.0204		MC33078	Dual Op-Amp low noise	0	R 20	57.60.1105		1M	MF, 1%, 0204, E24
0	IC 302	50.61.0204		MC33078	Dual Op-Amp low noise	0	R 21	57.60.1333		33K	MF, 1%, 0204, E24
0	IC 303	50.61.0204		MC33078	Dual Op-Amp low noise	0	R 22	57.60.1222		2K2	MF, 1%, 0204, E24
0	IC 304	50.61.8105		AK5392	Delta Sigma 24bit ADConv SOP28	0	R 23	57.60.1103		10K	MF, 1%, 0204, E24
0	IC 401	50.61.0204		MC33078	Dual Op-Amp low noise	0	R 24	57.60.1220		22R	MF, 1%, 0204, E24
0	IC 402	50.61.0204		MC33078	Dual Op-Amp low noise	0	R 25	57.60.1270		27R	MF, 1%, 0204, E24
						0	R 26	57.60.1220		22R	MF, 1%, 0204, E24
0	J 1	54.11.2009		96p	EU-R 3*32p	0	R 27	57.60.1270		27R	MF, 1%, 0204, E24
0	J 2	not used		Jumper	0.63 * 0.63mm	0	R 28	57.60.1000		0R0	MF, 0204
0	J 3	54.01.0021		Jumper	0.63 * 0.63mm	0	R 29	57.60.1000		0R0	MF, 0204
0	J 4	not used		Jumper	0.63 * 0.63mm	0	R 30	not used		10K	MF, 1%, 0204, E24
0	J 5	54.01.0021		Jumper	0.63 * 0.63mm	0	R 31	57.60.1103		10K	MF, 1%, 0204, E24
0	J 6	54.01.0021		Jumper	0.63 * 0.63mm	0	R 32	57.60.1333		33K	MF, 1%, 0204, E24
0	J 101	54.01.0021		Jumper	0.63 * 0.63mm	0	R 33	57.60.1333		33K	MF, 1%, 0204, E24
0	J 201	54.01.0021		Jumper	0.63 * 0.63mm	0	R 34	57.60.1221		220R	MF, 1%, 0204, E24
0	J 301	54.01.0021		Jumper	0.63 * 0.63mm	0	R 35	57.60.1221		220R	MF, 1%, 0204, E24
0	J 401	54.01.0021		Jumper	0.63 * 0.63mm	0	R 36	57.60.1103		10K	MF, 1%, 0204, E24
						0	R 37	not used		1K	MF, 1%, 0204, E24
0	L 1	62.03.0010		48uH	2A Toroid Chocke	0	R 38	not used		560R	MF, 1%, 0204, E24
0	L 2	62.03.0010		48uH	2A Toroid Chocke	0	R 39	not used		10K	MF, 1%, 0204, E24
						0	R 40	not used		10K	MF, 1%, 0204, E24
0	MP 1	1.940.562.11			D19M 24 BIT AD BOARD PCB	0	R 41	57.60.1103		10K	MF, 1%, 0204, E24
0	MP 2	1.940.562.04			TYPENSCHILD	0	R 42	not used		10K	MF, 1%, 0204, E24
0	MP 3	43.01.0108		Label	ESE-WARNSCHILD	0	R 43	not used		220R	MF, 1%, 0204, E24
0	MP 4	1.101.001.20		Label	TEXT-ETIK. 5*20 HARDWARE -20	0	R 44	not used		22K	MF, 1%, 0204, E24
0	MP 10	1.940.562.01	1 pce		FRONTPLATTE C4AD 24BIT	0	R 45	not used		10K	MF, 1%, 0204, E24
0	MP 11	1.940.600.04	1 pce		GRIFFEINLAGE 4TE	0	R 46	not used		1M	MF, 1%, 0204, E24
0	MP 12	49.02.0520	2 pcs	M2.5*12	Rändelschraube (Rack)	0	R 47	57.60.1102		1K	MF, 1%, 0204, E24
0	MP 13	49.02.0521	2 pcs		Metall-Buchse (Rack)	0	R 48	57.60.1302		3K0	MF, 1%, 0204, E24
0	MP 14	49.02.0522	2 pcs		Kartenhalter (Rack)	0	R 49	not used		1K	MF, 1%, 0204, E24
0	MP 15	49.02.0523	1 pce	M2.5*7	Senk-Schr, KS, Senkripp	0	R 50	57.60.1220		22R	MF, 1%, 0204, E24
0	MP 16	49.02.0504	1 pce	4TE	Frontplatten-Griff	0	R 51	57.60.1104		100K	MF, 1%, 0204, E24
0	MP 17	21.53.0279	2 pcs	M2.5*6	Z-Schraube Inbus Zn gb chr	0	R 52	57.60.1105		1M	MF, 1%, 0204, E24
0	MP 18	21.53.0284	1 pce	M2.5*16	Z-Schraube Inbus Zn gb chr	0	R 53	57.60.1102		1K	MF, 1%, 0204, E24
0	MP 19	28.99.0119	2 pcs		ROHRNIETE D 2.5*0.15* 9	0	R 54	57.60.1821		820R	MF, 1%, 0204, E24
0	MP 20	50.20.3004			Kühlkörper, TO 220, horizontal	0	R 55	57.60.1000		0R0	MF, 0204
						0	R 56	57.92.7019		0.4A	POLY- PTC, 60V
0	P 1	not used		1p	Pin 0.63*0.63	0	R 57	57.92.7019		0.4A	POLY- PTC, 60V
0	P 2	not used		1p	Pin 0.63*0.63	0	R 58	57.60.1103		10K	MF, 1%, 0204, E24
0	P 3	not used		1p	Pin 0.63*0.63	0	R 59	57.60.1103		10K	MF, 1%, 0204, E24
0	P 4	not used		1p	Pin 0.63*0.63	0	R 60	57.60.1683		68K	MF, 1%, 0204, E24
0	P 5	not used		1p	Pin 0.63*0.63	0	R 61	57.60.1562		5K6	MF, 1%, 0204, E24
0	P 6	not used		1p	Pin 0.63*0.63	0	R 62	57.60.1103		10K	MF, 1%, 0204, E24
0	P 7	not used		1p	Pin 0.63*0.63	0	R 63	57.60.1475		4M7	MF, 1%, 0204, E24
0	P 8	not used		1p	Pin 0.63*0.63	0	R 64	57.60.1475		4M7	MF, 1%, 0204, E24
0	P 9	not used		1p	Pin 0.63*0.63	0	R 65	57.60.1106		10M	MF, 1%, 0204, E24
0	P 10	not used		1p	Pin 0.63*0.63	0	R 101	57.60.1152		1K5	MF, 1%, 0204, E24
0	P 11	not used		1p	Pin 0.63*0.63	0	R 102	57.60.1272		2K7	MF, 1%, 0204, E24
0	P 12	not used		1p	Pin 0.63*0.63	0	R 103	57.60.1122		1K2	MF, 1%, 0204, E24
0	P 13	54.01.0020		1p	Pin 0.63*0.63	0	R 104	57.60.1272		2K7	MF, 1%, 0204, E24
0	P 14	54.01.0020		1p	Pin 0.63*0.63	0	R 105	57.60.1821		820R	MF, 1%, 0204, E24
0	P 15	54.01.0020		1p	Pin 0.63*0.63	0	R 106	57.60.1472		4K7	MF, 1%, 0204, E24
0	P 16	not used		1p	Pin 0.63*0.63	0	R 107	57.60.1332		3K3	MF, 1%, 0204, E24
0	P 17	not used		1p	Pin 0.63*0.63	0	R 108	57.60.1222		2K2	MF, 1%, 0204, E24
0	P 18	not used		1p	Pin 0.63*0.63	0	R 109	57.60.1510		51R	MF, 1%, 0204, E24
0	P 19	54.11.0136		2*3p	Pin 0.63*0.63, RM2.54	0	R 110	57.60.1331		330R	MF, 1%, 0204, E24
0	P 101	54.11.0136		2*3p	Pin 0.63*0.63, RM2.54	0	R 111	57.60.1681		680R	MF, 1%, 0204, E24
0	P 201	54.11.0136		2*3p	Pin 0.63*0.63, RM2.54	0	R 112	57.60.1332		3K3	MF, 1%, 0204, E24
0	P 301	54.11.0136		2*3p	Pin 0.63*0.63, RM2.54	0	R 113	57.60.1103		10K	MF, 1%, 0204, E24
0	P 401	54.11.0136		2*3p	Pin 0.63*0.63, RM2.54	0	R 114	57.60.1102		1K	MF, 1%, 0204, E24
						0	R 115	57.60.1333		33K	MF, 1%, 0204, E24
0	Q 1	50.60.0001		BC847B	NPN 45V 100mA SOT 23	0	R 116	57.60.1152		1K5	MF, 1%, 0204, E24
0	Q 2	50.60.0001		BC847B	NPN 45V 100mA SOT 23	0	R 117	57.60.1103		10K	MF, 1%, 0204, E24
0	Q 3	not used		BC847B	NPN 45V 100mA SOT 23	0	R 118	57.60.1332		3K3	MF, 1%, 0204, E24
0	Q 4	50.60.0001		BC847B	NPN 45V 100mA SOT 23	0	R 119	57.60.1332		3K3	MF, 1%, 0204, E24
0	Q 5	50.60.1001		BC857B	PNP 45V 100mA SOT 23	0	R 120	57.60.1222		2K2	MF, 1%, 0204, E24
						0	R 121	57.60.1392		3K9	MF, 1%, 0204, E24
0	R 1	57.60.1102		1K	MF, 1%, 0204, E24	0	R 122	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 2	57.60.1472		4K7	MF, 1%, 0204, E24	0	R 123	57.60.1510		51R	MF, 1%, 0204, E24
0	R 3	57.60.1333		33K	MF, 1%, 0204, E24	0	R 124	57.60.1103		10K	MF, 1%, 0204, E24
0	R 4	57.60.1333		33K	MF, 1%, 0204, E24	0	R 125	57.60.1229		2R2	MF, 1%, 0204, E24

D19M 24 Bit AD Board   1.940.562.20

Idx	Pos.	Part No.	Qty.	Type/Val.	Description
0	R 201	57.60.1152		1K5	MF, 1%, 0204, E24
0	R 202	57.60.1272		2K7	MF, 1%, 0204, E24
0	R 203	57.60.1122		1K2	MF, 1%, 0204, E24
0	R 204	57.60.1272		2K7	MF, 1%, 0204, E24
0	R 205	57.60.1821		820R	MF, 1%, 0204, E24
0	R 206	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 207	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 208	57.60.1222		2K2	MF, 1%, 0204, E24
0	R 209	57.60.1510		51R	MF, 1%, 0204, E24
0	R 210	57.60.1331		330R	MF, 1%, 0204, E24
0	R 211	57.60.1681		680R	MF, 1%, 0204, E24
0	R 212	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 213	57.60.1103		10K	MF, 1%, 0204, E24
0	R 214	57.60.1102		1K	MF, 1%, 0204, E24
0	R 215	57.60.1333		33K	MF, 1%, 0204, E24
0	R 216	57.60.1152		1K5	MF, 1%, 0204, E24
0	R 217	57.60.1103		10K	MF, 1%, 0204, E24
0	R 218	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 219	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 220	57.60.1222		2K2	MF, 1%, 0204, E24
0	R 221	57.60.1392		3K9	MF, 1%, 0204, E24
0	R 222	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 223	57.60.1510		51R	MF, 1%, 0204, E24
0	R 301	57.60.1152		1K5	MF, 1%, 0204, E24
0	R 302	57.60.1272		2K7	MF, 1%, 0204, E24
0	R 303	57.60.1122		1K2	MF, 1%, 0204, E24
0	R 304	57.60.1272		2K7	MF, 1%, 0204, E24
0	R 305	57.60.1821		820R	MF, 1%, 0204, E24
0	R 306	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 307	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 308	57.60.1222		2K2	MF, 1%, 0204, E24
0	R 309	57.60.1510		51R	MF, 1%, 0204, E24
0	R 310	57.60.1331		330R	MF, 1%, 0204, E24
0	R 311	57.60.1681		680R	MF, 1%, 0204, E24
0	R 312	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 313	57.60.1103		10K	MF, 1%, 0204, E24
0	R 314	57.60.1102		1K	MF, 1%, 0204, E24
0	R 315	57.60.1333		33K	MF, 1%, 0204, E24
0	R 316	57.60.1152		1K5	MF, 1%, 0204, E24
0	R 317	57.60.1103		10K	MF, 1%, 0204, E24
0	R 318	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 319	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 320	57.60.1222		2K2	MF, 1%, 0204, E24
0	R 321	57.60.1392		3K9	MF, 1%, 0204, E24
0	R 322	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 323	57.60.1510		51R	MF, 1%, 0204, E24
0	R 324	57.60.1229		2R2	MF, 1%, 0204, E24
0	R 325	57.60.1103		10K	MF, 1%, 0204, E24
0	R 401	57.60.1152		1K5	MF, 1%, 0204, E24
0	R 402	57.60.1272		2K7	MF, 1%, 0204, E24
0	R 403	57.60.1122		1K2	MF, 1%, 0204, E24
0	R 404	57.60.1272		2K7	MF, 1%, 0204, E24
0	R 405	57.60.1821		820R	MF, 1%, 0204, E24
0	R 406	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 407	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 408	57.60.1222		2K2	MF, 1%, 0204, E24
0	R 409	57.60.1510		51R	MF, 1%, 0204, E24
0	R 410	57.60.1331		330R	MF, 1%, 0204, E24
0	R 411	57.60.1681		680R	MF, 1%, 0204, E24
0	R 412	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 413	57.60.1103		10K	MF, 1%, 0204, E24
0	R 414	57.60.1102		1K	MF, 1%, 0204, E24
0	R 415	57.60.1333		33K	MF, 1%, 0204, E24
0	R 416	57.60.1152		1K5	MF, 1%, 0204, E24
0	R 417	57.60.1103		10K	MF, 1%, 0204, E24
0	R 418	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 419	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 420	57.60.1222		2K2	MF, 1%, 0204, E24
0	R 421	57.60.1392		3K9	MF, 1%, 0204, E24
0	R 422	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 423	57.60.1510		51R	MF, 1%, 0204, E24
0	RA 101	58.05.1201		200R	10%, 0.5W, Cermet
0	RA 102	58.05.1202		2k	10%, 0.5W, Cermet
0	RA 201	58.05.1201		200R	10%, 0.5W, Cermet
0	RA 202	58.05.1202		2k	10%, 0.5W, Cermet
0	RA 301	58.05.1201		200R	10%, 0.5W, Cermet
0	RA 302	58.05.1202		2k	10%, 0.5W, Cermet
0	RA 401	58.05.1201		200R	10%, 0.5W, Cermet
0	RA 402	58.05.1202		2k	10%, 0.5W, Cermet
0	RZ 1	not used		10k	8*R Resistor-Netw 2% SIP9
0	RZ 2	not used		10k	8*R Resistor-Netw 2% SIP9
0	RZ 3	57.88.4103		10k	8*R Resistor-Netw 2% SIP9
0	S 1	not used		SPDT	Toggle on - none - on

Idx	Pos.	Part No.	Qty.	Type/Val.	Description
0	S 2	55.11.0202		SPDT	Toggle on - none - on
0	T 1	1.022.647.00		1:1.4	OUTPUT TRAFO AES/EBU
0	T 2	1.022.647.00		1:1.4	OUTPUT TRAFO AES/EBU
0	T 3	1.022.647.00		1:1.4	OUTPUT TRAFO AES/EBU
0	T 4	1.022.647.00		1:1.4	OUTPUT TRAFO AES/EBU
0	T 5	1.022.632.00		1:1	DI/DO TRANSFORMER
0	T 101	1.022.454.00		1:0.175	EINGANGSTRAFO 1:0,175
0	T 201	1.022.454.00		1:0.175	EINGANGSTRAFO 1:0,175
0	T 301	1.022.454.00		1:0.175	EINGANGSTRAFO 1:0,175
0	T 401	1.022.454.00		1:0.175	EINGANGSTRAFO 1:0,175
0	TP 1	54.33.6010		2.8*0.8	PCB-Flachstecker, gerade
0	XDL 1	50.20.2501		Spacer	LED-Sockel
0	XDL 3	not used		Spacer	LED-Sockel
0	XDL 5	50.20.2501		Spacer	LED-Sockel
0	XDL 7	not used		Spacer	LED-Sockel
0	XDL 9	50.20.2501		Spacer	LED-Sockel
0	XDL 10	50.20.2501		Spacer	LED-Sockel
0	XIC 4	53.03.0168		16p	DIL 0.3", löt, gerade
0	XIC 5	53.03.0168		16p	DIL 0.3", löt, gerade
0	XIC 13	not used		PLCC32p	PLCC-Socket 32p
0	XIC 14	53.03.2284		PLCC84p	PLCC-Socket 84p
0	XIC 17	53.03.2232		PLCC32p	PLCC-Socket 32p
0	XT 101	1.022.400.03			ISOLATION
0	XT 201	1.022.400.03			ISOLATION
0	XT 301	1.022.400.03			ISOLATION
0	XT 401	1.022.400.03			ISOLATION
0	XY 1	89.01.1499			QUARZ - ISOLIERPLATTE
0	XY 2	89.01.1499			QUARZ - ISOLIERPLATTE
0	Y 1	89.01.0559		11.289MHz	11.289 600 MHz,
0	Y 2	89.01.1015		12.288MHz	12.288 000 MHz, HC 49/U

———————————— End of List ————————————

Comments

D19M AESI Board   1.940.580.20

STUDER

D19M AESI Board   1.940.580.20

D19M AESI Board   1.940.580.20

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	C 1	59.06.0104		100n	PETP, 10%, 63V
0	C 2	59.06.0104		100n	PETP, 10%, 63V
0	C 3	59.22.5220		22u	EL 25V, 20%, rad RM5
0	C 4	59.06.0104		100n	PETP, 10%, 63V
0	C 5	59.06.0473		47n	PETP, 10%, 63V
0	C 6	59.06.0104		100n	PETP, 10%, 63V
0	C 7	59.06.0104		100n	PETP, 10%, 63V
0	C 8	59.06.0103		10n	PETP, 10%, 63V
0	C 9	59.06.0104		100n	PETP, 10%, 63V
0	C 10	59.22.5220		22u	EL 25V, 20%, rad RM5
0	C 11	59.06.0104		100n	PETP, 10%, 63V
0	C 12	59.06.0473		47n	PETP, 10%, 63V
0	C 13	59.06.0103		10n	PETP, 10%, 63V
0	C 14	59.06.0104		100n	PETP, 10%, 63V
0	C 15	59.06.0104		100n	PETP, 10%, 63V
0	C 16	59.06.0103		10n	PETP, 10%, 63V
0	C 17	59.06.0103		10n	PETP, 10%, 63V
0	C 18	59.06.0104		100n	PETP, 10%, 63V
0	C 19	59.06.0104		100n	PETP, 10%, 63V
0	C 20	59.06.0104		100n	PETP, 10%, 63V
0	C 21	59.22.8479		4u7	EL 50V, 20%, rad RM5
0	C 22	59.22.5220		22u	EL 25V, 20%, rad RM5
0	C 23	59.06.0104		100n	PETP, 10%, 63V
0	C 24	59.06.0104		100n	PETP, 10%, 63V
0	C 25	59.06.0104		100n	PETP, 10%, 63V
0	C 26	59.06.0104		100n	PETP, 10%, 63V
0	D 1	50.04.0125		1N4448	75V, 150mA, 4ns, DO-35
0	DL 1	50.04.2202		HLMP1790	DL HLMP - 1790 GN *gesockelt mit 50.20.2501*
0	DL 2	50.04.2200		HLMP1700	DL HLMP - 1700 RT *gesockelt mit 50.20.2501*
0	DL 3	50.04.2202		HLMP1790	DL HLMP - 1790 GN *gesockelt mit 50.20.2501*
0	DL 4	50.04.2200		HLMP1700	DL HLMP - 1700 RT *gesockelt mit 50.20.2501*
0	DL 5	50.04.2202		HLMP1790	DL HLMP - 1790 GN *gesockelt mit 50.20.2501*
0	IC 1	50.13.0202		CS8412	IC CS 8412-CP ,A
0	IC 2	50.13.0202		CS8412	IC CS 8412-CP ,A
0	IC 3	50.15.0128		34C86	IC DS 34 C 86 TN, MC34C86P ,A
0	IC 4	50.14.1009		CY7C128-35	IC MCM 2018 A - 35 ,A
0	IC 5	1.940.960.20			SW 580 DSDAI (50.63.4205) *gesockelt mit 53.03.2284*
0	IC 6	50.17.7014		ACT14	.. 74 ACT 14 .
0	IC 7	50.06.0595		74LS595	IC SN 74 LS 595 N
0	IC 8	50.06.0595		74LS595	IC SN 74 LS 595 N
0	J 1	54.11.2009			J EU-R 3 * 32
0	MP 1	1.940.580.11			D19M AESI BOARD PCB
0	MP 2	1.940.580.04			TYPENSCHILD
0	MP 3	43.01.0108		Label	ESE-WARNSCHILD
0	MP 4	not used		Label	TEXT-ETIK. 5*20 HARDWARE -20
0	MP 10	1.940.580.01	1 pce		FRONTPLATTE
0	MP 11	1.940.600.04	1 pce		GRIFFEINLAGE 4TE
0	MP 12	49.02.0520	2 pcs	M2.5*12	Rändelschraube (Rack)
0	MP 13	49.02.0521	2 pcs		Metall-Buchse (Rack)
0	MP 14	49.02.0522	2 pcs		Kartenhalter (Rack)
0	MP 15	49.02.0523	1 pce	M2.5*7	Senk-Schr, KS, Senkripp
0	MP 16	49.02.0504	1 pce	4TE	Frontplatten-Griff
0	MP 17	21.53.0279	2 pcs		Z - SCHR. IS , ZN , M2.5 * 6
0	MP 18	21.53.0284	1 pce		Z - SCHR. IS , ZN , M2.5 * 16
0	MP 19	28.99.0119	2 pcs		ROHRNIETE D 2.5*0.15* 9
0	R 1	57.11.3821		820R	
0	R 2	57.11.3821		820R	MF, 1%, 0207
0	R 3	57.11.3821		820R	MF, 1%, 0207
0	R 4	57.11.3821		820R	MF, 1%, 0207
0	R 5	57.11.3821		820R	MF, 1%, 0207
0	R 6	57.11.3102		1k0	MF, 1%, 0207
0	R 7	57.11.3470		47R	MF, 1%, 0207
0	R 8	57.11.3823		82k	MF, 1%, 0207
0	R 9	57.11.3102		1k0	MF, 1%, 0207
0	R 10	57.11.3470		47R	MF, 1%, 0207
0	R 11	57.11.3823		82k	MF, 1%, 0207
0	R 12	57.11.3103		10k	MF, 1%, 0207
0	R 13	57.11.3103		10k	MF, 1%, 0207
0	R 14	57.11.3103		10k	MF, 1%, 0207

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	R 15	57.11.3103		10k	MF, 1%, 0207
0	R 16	57.11.3103		10k	MF, 1%, 0207
0	R 17	57.11.3105		1M0	MF, 1%, 0207
0	R 18	57.11.3103		10k	MF, 1%, 0207
0	R 19	57.11.3103		10k	MF, 1%, 0207
0	R 20	57.11.3104		100k	MF, 1%, 0207
0	R 21	57.11.3221		220R	MF, 1%, 0207
0	R 22	57.11.3221		220R	MF, 1%, 0207
0	R 23	57.11.3221		220R	MF, 1%, 0207
0	R 24	57.11.3221		220R	MF, 1%, 0207
0	R 25	57.92.7053		1.6A	POLY- PTC, 30V
0	T 1	1.022.632.00		1.022.632.00	DI/DO TRANSFORMER
0	T 2	1.022.632.00		1.022.632.00	DI/DO TRANSFORMER
0	XDL 1	50.20.2501		Spacer	LED-Sockel
0	XDL 2	50.20.2501		Spacer	LED-Sockel
0	XDL 3	50.20.2501		Spacer	LED-Sockel
0	XDL 4	50.20.2501		Spacer	LED-Sockel
0	XDL 5	50.20.2501		Spacer	LED-Sockel
0	XIC 5	53.03.2284		XIC PLCC84	XIC PLCC 84 PIN

———————————— End of List ————————————

Comments

SCHEMATA / CIRCUIT DIAGRAMS

Block Diagram
D19M Madi Coaxial   1.940.500.21
Madi Optical   1.940.510.21

IIC BUS DI2C
HI2C

12M

2

3.686 MHz

RESET
GENERATOR
MAX1232
ST

RST

D0..7

UPRESET
UPWATCH

RST

ES BUS

NCSPROM
NCSREGIN
NCSREGOUT
SELCX
SLD

uP 80C652

AD0..7

ADDRESS
LATCH

A0..7

EPROM
64K

RAM
8K

UART

SCC2691

RESET

WROK

INT1
INT0

CPALE

DATA
CLK

A8..15

A0..15

OE

CE OE R/W

A0..A2

CE OE R/W

POWER
green

EPROMCS

RAMCS WR RD

WR RD
VARTCS

UPAESDSD

AESNDSD

CLK   DI DO

E0
E1
E2
MASTER
UPAESDSD
FREQMIS
MERR

SHIFT
REG

CA0

SHIFT
REG

UPMASTER
UPENTDM
MADIOK

SHIFT
REG

CS ROUTING
RAM

UPMASTER

AESINN

SYNC IN

EEPROM
NMC93C46

CSEEPROM

CA7

AESR

E0 E1 E2 SELCX

SLD

NCSREGIN

NCSREGIN
yel   green

RESETN NCSREGOUT

8

A13..A15
A0..A6

AES RECEIVER
CS8412

TDM
BUS

REG

REG

DL0..7

DR0..7

REG

MUTE
TCLK

2

TRANSCEIVER
WITH REG

4

FSYNCR FS2S6R ERRF

TDMCLK

TDMCLK1

DUAL PORTED
RAM

AL0..9

AR0..9

OERD
OEWR
CLKRD
CLKWR

green

REG

MWR

RD WR CPALE

TDMCLK

TDMDIS

PAGEA/B AL0,1,8,9

AL2..7

REG

RRACT RRACLK

7

8

ROUTING
RAM

A0..A6

WR

MADIIN CONTROLLER

FRAME
CK128

3

2

8

2

UPMASTER

MADI
IN

TAXI/FOXI
RECEIVER

8

1 TAXID6

8-BIT
SHIFT REG

3 CLKSR,LOADSR,OEAC

XILINX

MADI
OUT

2 TAXID6,TAXID7

4 TCLK,TCSTRB,TDSTRB,TVIOL

MERR FREQMIS

UPENTDM UPMASTER WROK

12.5M

NOT REQUIRED FOR FOXI

1.940.510.21

23.09.92 ML					1.940.510.21
	D19M				PAGE 1 OF 1

STUDER   D19M MADI IN   SC   1.940.500.21

D19M Madi Coaxial   1.940.500.21
Madi Optical   1.940.510.21

IC12 44 80C652WP
VCC
C23 27P
Y2 12.000MHZ
C22 27P

VDD
XTAL1 21
XTAL2 20
EA 35
PSEN 32
ALE 33

AD0/P0.0 43
AD1/P0.1 42
AD2/P0.2 41
AD3/P0.3 40
AD4/P0.4 39
AD5/P0.5 38
AD6/P0.6 37
AD7/P0.7 36

A_8/P2.0 24
A_9/P2.1 25
A10/P2.2 26
A11/P2.3 27
A12/P2.4 28
A13/P2.5 29
A14/P2.6 30
A15/P2.7 31

P3.0/RXD SERDATA 11
P3.1/TXD SERCLK 13
P3.2/INT0 UARTINT 14
P3.3/INT1 WROK 15
P3.4/T0 UPWATCH 16
P3.5/T1 17
P3.6/WR NCPWR 18
P3.7/RD NCPRD 19

VSS 22   RST 10

P1.0 2 NCSPROM
P1.1 3 NCSREGIN
P1.2 4 NCSREGOUT
P1.3 5 SLD
P1.4 6
P1.5 7
SCL/P1.6 8 HIIC P1 3B HIIC
SDA/P1.7 9 DIIC P1 3C DIIC

SELCX 3J3

VCC
IC4 KM93C46
DO 4 VCC 8
DI 2
SK 1
GND CS

CPD7 1 OE 1 LE 11 CPA7 9
CPD6 3 D7 Q7 CPA6 12
CPD5 5 D6 Q6 CPA5 13
CPD4 7 D5 Q5 CPA4 14
CPD3 9 D4 74HCT573 Q4 CPA3 15
CPD2 12 D3 IC20 Q3 CPA2 16
CPD1 14 D2 Q2 CPA1 17
CPD0 16 D1 Q1 CPA0 18
2 D0 Q0 19
CPD CPA

CPA8 8   CPA12 4
CPA9 7   CPA13 3
CPA10 6 CPA14 2
CPA11 5 CPA15 1

VCC 28
IC8 27C512
16 CPA0 10 A0
15 CPA1 9   A1
14 CPA2 8   A2
13 CPA3 7   A3
12 CPA4 6   A4
11 CPA5 5   A5
10 CPA6 4   A6
9 CPA7 3   A7
8 CPA8 25   A8
7 CPA9 24   A9
6 CPA10 21 A10
5 CPA11 23 A11
4 CPA12 2   A12
3 CPA13 26 A13
1 CPA14 27 A14
2 CPA15 1   A15

Q0 11 CPD0
Q1 12 CPD1
Q2 13 CPD2
Q3 15 CPD3
Q4 16 CPD4
Q5 17 CPD5
Q6 18 CPD6
Q7 19 CPD7

CE GND OE
20 14 22

VCC
IC9 HM6264
16 CPA0 10 A0
15 CPA1 9   A1
14 CPA2 8   A2
13 CPA3 7   A3
12 CPA4 6   A4
11 CPA5 5   A5
10 CPA6 4   A6
9 CPA7 3   A7
8 CPA8 25   A8
7 CPA9 24   A9
6 CPA10 21 A10
5 CPA11 23 A11
4 CPA12 2   A12
1 NC 26   A13
22 RAMCS 20 A14

I/O0 11 CPD0
I/O1 12 CPD1
I/O2 13 CPD2
I/O3 15 CPD3
I/O4 16 CPD4
I/O5 17 CPD5
I/O6 18 CPD6
I/O7 19 CPD7

OE1 22 OE2 RES CE GND R/W
NCPRD   NCPWR
2F7C R12 1K 26
VCC

CPALE 2F6
NCPPSEN 2D5
CPD 2K7
CPA 2B9

VCC 24
IC17 SCC2691
CPD0 8 22 D0
CPD1 7 21 D1
CPD2 6 20 D2
CPD3 5 19 D3
CPD4 4 18 D4
CPD5 3 17 D5
CPD6 2 16 D6
CPD7 1 15 D7
TXD 3 ESTRMT
RXD 2 ESRECV
MPI 9 ESENABN
MPO 11 UPRESET

CPA0 16 6 A0
CPA1 15 5 A1
CPA2 14 4 A2

RDN 1 23
WRN
CEN

2D5 UARTCS

INTRN 13
X2 10
CLK 12 GND

R32 1M
Y3 3.686MHZ
C53 3P3 C63 3P3

NCPRD 2F7
NCPWR 2F8

RZ3 8

IC29
74HC04 ESENAB

IC25 75174
1D 2 1Q
1D 1Q
EN
2D 2Q TB P1 22C TB
2Q TA P1 22A TA

9637
IC31
RB P1 24C RB
RA P1 24A RA

RZ3 6
RZ3 5
RZ3 3

NCSREGIN 2D8
IC29
NCSREGIN 3 74HC04

VCC
IC27 74HC589
14 SER
SERCLK 11 SCK
CSREGIN 12 RCK
RZ4 33K
P1 20B RZ4 CA0 15 CA0
CA0 P1 21B RZ4 CA1 1 CA1
CA1 P1 22B RZ4 CA2 2 CA2
CA2 P1 23B RZ4 CA3 3 CA3
CA3 P1 24B RZ4 CA4 4 CA4
CA4 P1 25B RZ4 CA5 5 CA5
CA5 P1 26B RZ4 CA6 6 CA6
CA6 P1 27B RZ4 CA7 7 CA7
CA7
QH 9
SLOAD GND OE
13 8 10
SLD

VCCA
IC26 74HC589
14 SER
SERCLK 11 SCK
CSREGIN 12 RCK
3K4 E0 15
3K4 E1 1
3K4 E2 2 UPAESDSD
3K4 E3 3 FREQMIS
3K4 E4 4 MERR
3K4 E5 5 ERRF
3K2 E7 6 MASTER
QH 9
R29 10K
P14
P15
SLOAD GND OE
13 8 10
SLD NCSREGIN

SERDATA 14 SER
VCC 16
IC22 74HC594
SERCLK 11 SCK
NCSREGOUT 12 RCK
QA 15 UPMASTER
QB UPENTDM 2F6
QC
QD MADIOK
QE
QF
QG
QH
SRCLA GND RCLR QH'
RZ3 7

IC29 74HC04 R34 1K DL3 TLUY 2401 SLAVE
IC29 74HC04 R31 1K DL1 TLUG 2401 MADI OK
D7 FILT1 3H2 1N4448
IC29 74HC04 R36 1K DL2 TLUG 2401 SYNC OK
IC29 74HC04 R37 1K DL4 TLUG 2401 POWER

VCC
P8 P9
P6 P7
VCC
IC3 MAX1232
RZ3 4
T0L 3 RST 6 RESETN
PBRST 1 RST 5 RESET
S1
TD ST 7
VCC GND 4
P4 P5
P2 P3

RESETN 3K9 2D8
RESET 11 RESET 2C8

UPRESET 2E9

OPTICAL VERSION: 1.940.510.21

(0) 11.06.1998 ML
DS-D
PAGE 1 OF 3
STUDER
DSD MADI COAX
SC 1.940.500.21
SECTION 9

STUDER

D19M Madi Coaxial 1.940.500.21
Madi Optical 1.940.510.21

OPTICAL VERSION: 1.940.510.21

(0) 11.06.1998 ML			
	DS-D		PAGE 2 OF 3

STUDER DSD MADI COAX SC 1.940.500.21

D19M Madi Coaxial   1.940.500.21
Madi Optical   1.940.510.21

NOT USED FOR OPTICAL VERSION

FOR OPTICAL VERSION
USE DLR 6000

OPTICAL VERSION: 1.940.510.21

(0) 11.06.1998 ML					
			DS-D		PAGE 3 OF 3
STUDER		DSD MADI COAX		SC	1.940.500.21

STUDER

D19M Madi Coaxial   1.940.500.21

MP 17

MP 8

J3, J4

MP 8

MP 5

MP 15

MP 14

XDL 1

MP 10

XDL 2,4

MP 18

MP 11

MP 16

MP 13   MP 1

MP 12

MP 7

MP 8

MP 19

C1, C11, C14, C15, Y1, R1, IC1, C2, C3, C4, C5, R2, C6, L1, L2, L3, L4, C7, R3, R4, R5, R6, R7, R8, R14, C8, C12, C9, IC6, C10, C13, F1

IC7, DL1, R9, R10, R11, D2, C17, P2, P3, P4, P5, P6, P7, P8, P9, IC3, D1, IC4, R12, C20, C22, Y2, C23, IC2, C16, C18, IC5, R13, R16, R15, R17, T1, C19, C21, RZ1, P11, P10, C25, R18, C26, R22, P1

L5, C24, L6, R19, R20, C31, C33, R21, R22, C34, P12 GND, L7, L8, IC8, IC9, IC12, IC10, IC11, P13 GND, IC13, IC14, IC15

J1, C27, C28, C29, C30, C32, M35, R23, T2, C37, C39, IC16, R25, C40, C38, C24, L9, C41, C46, C44, C45, S1, C57, C47, C48, C49

J2, DL2, DL3, C54, C55, T3, C51, C52, C56, L10, IC20, IC17, D7, IC23, IC22, R23, IC24, IC21, IC18, IC19, IC25, IC26, R29, R24, IC27, R33, P14, C77, C78

DL4, R34, C50, C42, C43, IC28, C59, C60, L11, C58, IC30, R31, C53, Y3, C63, R32, IC29, IC31, C66, C67, C68, C69, C70, C71, C72, C73, C74, C75, C76, P15, C64, C79

C61, C65, C62, R30, R36, R37, R26, P13

SECTION 9

STUDER REGENSDORF   D19M MADI Coax.   ESE   1.940.500.21

11.06.98 hm ML HM

D19M Madi Coaxial 1.940.500.21

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	C 1	59.06.0682		6n8	PETP, 63V, 10%, RM5
0	C 2	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 3	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 4	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 5	59.22.5220		22u	EL 25V, 20%, RM5
0	C 6	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 7	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 8	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 9	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 10	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 11	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 12	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 13	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 14	59.34.2390		39p	CER 63V, 5%, N150
0	C 15	59.34.2390		39p	CER 63V, 5%, N150
0	C 16	59.34.4101		100p	CER 63V, 5%, N750
0	C 17	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 18	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 19	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 20	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 21	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 22	59.34.2270		27p	CER 63V, 5%, N150
0	C 23	59.34.2270		27p	CER 63V, 5%, N150
0	C 24	59.22.6100		10u	EL 35V, 20%, RM5
0	C 25	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 26	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 27	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 28	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 29	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 30	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 31	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 32	59.30.6109		1u	TA, 20%, 35V
0	C 33	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 34	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 35	59.30.6109		1u	TA, 20%, 35V
0	C 36	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 37	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 38	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 39	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 40	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 41	59.22.3470		47u	EL 10V, 20%, RM5
0	C 42	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 43	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 44	59.22.4221		220u	EL 16V, 20%, RM5
0	C 45	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 46	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 47	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 48	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 49	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 50	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 51	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 52	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 53	59.34.0339		3p3	CER 63V, 5%, P100
0	C 54	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 55	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 56	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 57	59.22.6100		10u	EL 35V, 20%, RM5
0	C 58	59.22.4221		220u	EL 16V, 20%, RM5
0	C 59	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 60	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 61	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	C 62	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 63	59.34.0339		3p3	CER 63V, 5%, P100
0	C 64	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 65	59.06.0473		47n	PETP, 63V, 10%, RM5
0	C 66	59.06.0103		10n	PETP, 63V, 10%, RM5
0	C 67	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 68	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 69	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 70	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 71	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 72	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 73	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 74	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 75	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 76	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 77	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 78	59.06.0683		68n	PETP, 63V, 10%, RM5
0	C 79	59.32.4102		1n	C 1000 P , 20%, 50V , CER
0	D 1	50.04.0127		BAT85	200mA, Schottky
0	D 2	50.04.0127		BAT85	200mA, Schottky
0	D 3	50.04.0125		1N4448	75V, 150mA, 4ns, DO-35
0	D 4	50.04.0125		1N4448	75V, 150mA, 4ns, DO-35
0	D 5	50.04.0125		1N4448	75V, 150mA, 4ns, DO-35
0	D 6	50.04.0125		1N4448	75V, 150mA, 4ns, DO-35
0	D 7	50.04.0125		1N4448	75V, 150mA, 4ns, DO-35
0	DL 1	50.04.2202		HLMP1790	DL HLMP - 1790 GN
0	DL 2	50.04.2202		HLMP1790	DL HLMP - 1790 GN
0	DL 3	50.04.2201		HLMP1719	DL HLMP - 1719 GB
0	DL 4	50.04.2202		HLMP1790	DL HLMP - 1790 GN
0	F 1	51.01.0119		1.6A	T 5*20 L 250V
0	IC 1	50.17.7273		ACT273	.. 74 ACT 273 .
0	IC 2	50.13.0202		CS8412	IC CS 8412-CP ,A
0	IC 3	50.11.0159		MAX1232	IC MAX 1232 CPA, DS 1232
0	IC 4	50.14.2103		HY93C46S	EEPROM 64 * 16, serial
0	IC 5	50.11.1002		LM360	High speed Comparator
0	IC 6	50.06.0245		74LS245	IC SN 74 LS 245 N TTL-3
0	IC 7	50.16.0702		AM7969-125P	IC AM 7969-125 PC ,A
0	IC 8	1.940.940.20			SW 500 MADI (50.14.2002)
0	IC 9	50.14.0133		5565	IC HM 6264LP-15 ,A
0	IC 10	50.63.4002		XC3030A-7	LCA 3000 / 3000 PLCC84
0	IC 11	50.63.1702		CY7C130	Dualport SRAM, 1K*8
0	IC 12	50.63.0009		80C652	MPU 8bit
0	IC 13	50.17.0574		74HCT574	IC .. 74 HCT574 ., ,A
0	IC 14	50.06.1576		74ALS576	Octal D-Type FF, tri
0	IC 15	50.06.1576		74ALS576	Octal D-Type FF, tri
0	IC 16	50.11.0156		MAX9685	ECL Comparator, latching
0	IC 17	50.16.0201		SCC2691	IC SCC 2691 AE 1 N 24 ,A
0	IC 18	50.17.5652		74AC652	Octal Bus Reg/Transceiver
0	IC 19	50.14.1009		7C128A	SRAM 2K*8 35ns
0	IC 20	50.17.0573		74HCT573	IC .. 74 HCT573 ., ,A
0	IC 21	50.17.1574		74HC574	IC ... 74 HC 574 ., ,A
0	IC 22	50.17.1594		74HC594	IC ... 74 HC 594 ., ,A
0	IC 23	1.940.941.21			SW 500 MADIIN (50.14.1501)
0	IC 24	50.17.1595		74HC595	IC ... 74 HC 595 ., ,A
0	IC 25	50.15.0121		75174	IC SN 75174 N
0	IC 26	50.17.1589		74HC589	MC 74 HC 589 N
0	IC 27	50.17.1589		74HC589	MC 74 HC 589 N
0	IC 28	50.11.0156		MAX9685	ECL Comparator, latching
0	IC 29	50.17.1004		74HC04	IC ... 74 HC 04 ., ,A
0	IC 30	50.10.0124		MAX660	V-Converter ... +5.5V to -5.5V
0	IC 31	50.15.0114		9637	Dual diff Line Receiver
0	J 1	54.21.2031		BNC	J 1 POL PRINT/WINKEL BNC
0	J 2	54.21.2031		BNC	J 1 POL PRINT/WINKEL BNC
0	J 3	54.01.0021		Jumper	0.63 * 0.63mm
0	J 4	54.01.0021		Jumper	0.63 * 0.63mm
0	L 1	62.02.3101		100uH	10%, radial RM 5
0	L 2	62.02.3100		10uH	10%, radial RM 5
0	L 3	62.02.3100		10uH	10%, radial RM 5
0	L 4	62.02.3220		22uH	10%, radial RM 5
0	L 5	62.03.0001		10uH	1A Toroid Chocke
0	L 6	62.02.3100		10uH	10%, radial RM 5
0	L 7	62.02.3100		10uH	10%, radial RM 5
0	L 8	62.02.3100		10uH	10%, radial RM 5
0	L 9	62.02.3100		10uH	10%, radial RM 5
0	L 10	62.02.3100		10uH	10%, radial RM 5
0	L 11	62.02.3100		10uH	10%, radial RM 5
0	MP 1	1.940.500.11			D19M MADI PCB
0	MP 2	1.010.057.43			Baugruppenschild
0	MP 3	43.01.0108		Label	ESE-WARNSCHILD
0	MP 5	1.010.117.51			TEXT-ETIK. 5*20 (T1.60A)
0	MP 7	1.010.015.50		Spacer	ISOLIER-SCHEIBE ZU T0 5
0	MP 8	89.01.1499	3 pcs		QUARZ - ISOLIERPLATTE
0	MP 10	1.940.500.01	1 pce		FRONTPLATTE
0	MP 11	1.940.600.04	1 pce		GRIFFEINLAGE 4TE
0	MP 12	49.02.0520	2 pcs	M2.5*12	Rändelschraube (Rack)
0	MP 13	49.02.0521	2 pcs		Metall-Buchse (Rack)
0	MP 14	49.02.0522	2 pcs		Kartenhalter (Rack)
0	MP 15	49.02.0523	1 pce	M2.5*7	Senk-Schr, KS, Senkripp
0	MP 16	49.02.0504	1 pce	4TE	Frontplatten-Griff
0	MP 17	21.53.0279	2 pcs	M2.5*6	Z-Schraube Inbus Zn gb chr
0	MP 18	21.53.0284	2 pcs	M2.5*16	Z-Schraube Inbus Zn gb chr
0	MP 19	28.99.0119	2 pcs		ROHRNIETE D 2.5*0.15* 9
0	MP 20	1.101.001.21	1 pce		TEXT-ETIK. 5*20 HARDWARE -21
0	P 1	54.11.2009		96p	EU-R 3*32p
0	P 2	54.01.0020		1p	Pin 0.63*0.63
0	P 3	54.01.0020		1p	Pin 0.63*0.63
0	P 4	54.01.0020		1p	Pin 0.63*0.63
0	P 5	54.01.0020		1p	Pin 0.63*0.63
0	P 6	54.01.0020		1p	Pin 0.63*0.63
0	P 7	54.01.0020		1p	Pin 0.63*0.63
0	P 8	54.01.0020		1p	Pin 0.63*0.63
0	P 9	54.01.0020		1p	Pin 0.63*0.63
0	P 10	54.01.0020		1p	Pin 0.63*0.63
0	P 11	54.01.0020		1p	Pin 0.63*0.63

D19M Madi Coaxial   1.940.500.21

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	P 12	54.02.0320	1p		Flatpin, 2.8*0.8mm
0	P 13	54.02.0320	1p		Flatpin, 2.8*0.8mm
0	P 14	54.01.0020	1p		Pin 0.63*0.63
0	P 15	54.01.0020	1p		Pin 0.63*0.63
0	R 1	57.11.3102	1k0	MF, 1%, 0207	
0	R 2	57.11.3102	1k0	MF, 1%, 0207	
0	R 3	57.11.3103	10k	MF, 1%, 0207	
0	R 4	57.11.3103	10k	MF, 1%, 0207	
0	R 5	57.11.3271	270R	MF, 1%, 0207	
0	R 6	57.11.3150	15R	MF, 1%, 0207	
0	R 7	57.11.3103	10k	MF, 1%, 0207	
0	R 8	57.11.3103	10k	MF, 1%, 0207	
0	R 9	57.11.3102	1k0	MF, 1%, 0207	
0	R 10	57.11.3102	1k0	MF, 1%, 0207	
0	R 11	57.11.3102	1k0	MF, 1%, 0207	
0	R 12	57.11.3102	1k0	MF, 1%, 0207	
0	R 13	57.11.3471	470R	MF, 1%, 0207	
0	R 14	57.11.3271	270R	MF, 1%, 0207	
0	R 15	57.11.3150	15R	MF, 1%, 0207	
0	R 16	not used	470R	MF, 1%, 0207	
0	R 17	57.11.3103	10k	MF, 1%, 0207	
0	R 18	57.11.3102	1k0	MF, 1%, 0207	
0	R 19	57.10.1750	75R	MF, 1%, 0204	
0	R 20	57.10.1750	75R	MF, 1%, 0204	
0	R 21	57.10.1331	330R	MF, 1%, 0204	
0	R 22	57.11.3151	150R	MF, 1%, 0207	
0	R 23	57.10.1750	75R	MF, 1%, 0204	
0	R 24	57.10.1122	1k2	MF, 1%, 0204	
0	R 25	57.10.1331	330R	MF, 1%, 0204	
0	R 26	57.11.3102	1k0	MF, 1%, 0207	
0	R 27	57.10.1331	330R	MF, 1%, 0204	
0	R 28	57.10.1750	75R	MF, 1%, 0204	
0	R 29	57.11.3103	10k	MF, 1%, 0207	
0	R 30	57.10.1471	470R	MF, 1%, 0204	
0	R 31	57.11.3102	1k0	MF, 1%, 0207	
0	R 32	57.11.3105	1M0	MF, 1%, 0207	
0	R 33	57.11.3102	1k0	MF, 1%, 0207	
0	R 34	57.11.3102	1k0	MF, 1%, 0207	
0	R 35	57.10.1471	470R	MF, 1%, 0204	
0	R 36	57.11.3102	1k0	MF, 1%, 0207	
0	R 37	57.11.3102	1k0	MF, 1%, 0207	
0	RZ 1	57.88.4102	1k0	8*R Resistor-Netw 2% SIP9	
0	RZ 2	57.88.4102	1k0	8*R Resistor-Netw 2% SIP9	
0	RZ 3	57.88.4103	10k	8*R Resistor-Netw 2% SIP9	
0	RZ 4	57.88.4333	33k	8*R Resistor-Netw 2% SIP9	
0	S 1	55.03.0122	1*a	S 1 TASTE, 1*A, PRINT,IMPULS	
0	T 1	63.15.0021			RF - Trafo
0	T 2	63.15.0001			IMPULSTRANSFORMATOR
0	T 3	63.15.0001			IMPULSTRANSFORMATOR
0	XDL 1	50.20.2501	Spacer		LED-Sockel
0	XDL 2	50.20.2501	Spacer		LED-Sockel
0	XDL 3	50.20.2501	Spacer		LED-Sockel
0	XF 1	53.03.0118			XF 5 * 20, PRINT-LIEGEND
0	XIC 8	53.03.0173	28p		DIL 0.6", löt, gerade
0	XIC 10	53.03.2284	PLCC84p		PLCC-Socket 84p
0	XIC 11	53.03.2252	PLCC52p		PLCC-Socket 52p
0	XIC 12	53.03.2244	PLCC44p		PLCC-Socket 44p
0	XIC 14	53.03.0165	20p		DIL 0.3", löt, gerade
0	XIC 15	53.03.0165	20p		DIL 0.3", löt, gerade
0	XIC 23	53.03.0166	8p		DIL 0.3", löt, gerade
0	XIC 25	53.03.0168	16p		DIL 0.3", löt, gerade
0	XIC 31	53.03.0166	8p		DIL 0.3", löt, gerade
0	Y 1	89.01.1013	12.500MHz		12.500 000 MHz, HC 49/U
0	Y 2	89.01.1014	12.000MHz		12.000 000 MHz, HC 49/U
0	Y 3	89.01.1002	3.686MHz		3.686 400 MHz, HC 18/U

──────────────── End of List ────────────────

Comments

Madi Optical 1.940.510.21

MP 17

MP 8

J3, J4

MP 8

MP 5

MP 15

MP 14

XDL 1

MP 10

XDL 2,3

MP 18

MP 11

MP 16

MP 13   MP 1

MP 12

MP7

MP 8

MP 19

STUDER

Madi Optical 1.940.510.21

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	C 1	not used	6n8	PETP, 63V, 10%, RM5	
0	C 2	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 3	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 4	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 5	59.22.5220	22u	EL 25V, 20%, RM5	
0	C 6	59.06.0473	47n	PETP, 63V, 10%, RM5	
0	C 7	59.06.0104	100n	PETP, 63V, 10%, RM5	
0	C 8	59.06.0104	100n	PETP, 63V, 10%, RM5	
0	C 9	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 10	59.32.4102	1n	C 1000 P , 20%, 50V , CER	
0	C 11	not used	1n	C 1000 P , 20%, 50V , CER	
0	C 12	59.06.0103	10n	PETP, 63V, 10%, RM5	
0	C 13	59.06.0473	47n	PETP, 63V, 10%, RM5	
0	C 14	59.34.2390	39p	CER 63V, 5%, N150	
0	C 15	59.34.2390	39p	CER 63V, 5%, N150	
0	C 16	59.34.4101	100p	CER 63V, 5%, N750	
0	C 17	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 18	59.06.0104	100n	PETP, 63V, 10%, RM5	
0	C 19	59.06.0103	10n	PETP, 63V, 10%, RM5	
0	C 20	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 21	59.06.0103	10n	PETP, 63V, 10%, RM5	
0	C 22	59.34.2270	27p	CER 63V, 5%, N150	
0	C 23	59.34.2270	27p	CER 63V, 5%, N150	
0	C 24	59.22.6100	10u	EL 35V, 20%, RM5	
0	C 25	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 26	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 27	59.06.0104	100n	PETP, 63V, 10%, RM5	
0	C 28	59.32.4102	1n	C 1000 P , 20%, 50V , CER	
0	C 29	59.32.4102	1n	C 1000 P , 20%, 50V , CER	
0	C 30	59.06.0104	100n	PETP, 63V, 10%, RM5	
0	C 31	not used	1n	C 1000 P , 20%, 50V , CER	
0	C 32	not used	1u	TA, 20%, 35V	
0	C 33	not used	100n	PETP, 63V, 10%, RM5	
0	C 34	not used	100n	PETP, 63V, 10%, RM5	
0	C 35	not used	1u	TA, 20%, 35V	
0	C 36	not used	1n	C 1000 P , 20%, 50V , CER	
0	C 37	not used	47n	PETP, 63V, 10%, RM5	
0	C 38	not used	100n	PETP, 63V, 10%, RM5	
0	C 39	not used	1n	C 1000 P , 20%, 50V , CER	
0	C 40	not used	100n	PETP, 63V, 10%, RM5	
0	C 41	59.22.3470	47u	EL 10V, 20%, RM5	
0	C 42	not used	100n	PETP, 63V, 10%, RM5	
0	C 43	not used	1n	C 1000 P , 20%, 50V , CER	
0	C 44	59.22.4221	220u	EL 16V, 20%, RM5	
0	C 45	59.06.0103	10n	PETP, 63V, 10%, RM5	
0	C 46	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 47	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 48	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 49	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 50	not used	47n	PETP, 63V, 10%, RM5	
0	C 51	not used	47n	PETP, 63V, 10%, RM5	
0	C 52	not used	100n	PETP, 63V, 10%, RM6	
0	C 53	59.34.0339	3p3	CER 63V, 5%, P100	
0	C 54	not used	47n	PETP, 63V, 10%, RM5	
0	C 55	not used	1n	C 1000 P , 20%, 50V , CER	
0	C 56	not used	1n	C 1000 P , 20%, 50V , CER	
0	C 57	59.22.6100	10u	EL 35V, 20%, RM5	
0	C 58	59.22.4221	220u	EL 16V, 20%, RM5	
0	C 59	not used	1n	C 1000 P , 20%, 50V , CER	
0	C 60	not used	100n	PETP, 63V, 10%, RM5	
0	C 61	not used	1n	C 1000 P , 20%, 50V , CER	
0	C 62	not used	68n	PETP, 63V, 10%, RM5	
0	C 63	59.34.0339	3p3	CER 63V, 5%, P100	
0	C 64	59.06.0473	47n	PETP, 63V, 10%, RM5	
0	C 65	not used	47n	PETP, 63V, 10%, RM5	
0	C 66	59.06.0103	10n	PETP, 63V, 10%, RM5	
0	C 67	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 68	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 69	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 70	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 71	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 72	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 73	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 74	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 75	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 76	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 77	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 78	59.06.0683	68n	PETP, 63V, 10%, RM5	
0	C 79	59.32.4102	1n	C 1000 P , 20%, 50V , CER	
0	D 1	50.04.0127	BAT85	200mA, Schottky	
0	D 2	50.04.0127	BAT85	200mA, Schottky	
0	D 3	not used	1N4448	75V, 150mA, 4ns, DO-35	
0	D 4	not used	1N4448	75V, 150mA, 4ns, DO-35	
0	D 5	not used	1N4448	75V, 150mA, 4ns, DO-35	
0	D 6	not used	1N4448	75V, 150mA, 4ns, DO-35	

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	D 7	50.04.0125	1N4448	75V, 150mA, 4ns, DO-35	
0	DL 1	50.04.2202	HLMP1790	DL HLMP - 1790 GN	
0	DL 2	50.04.2202	HLMP1790	DL HLMP - 1790 GN	
0	DL 3	50.04.2201	HLMP1719	DL HLMP - 1719 GB	
0	DL 4	50.04.2202	HLMP1790	DL HLMP - 1790 GN	
0	F 1	51.01.0119	1.6A	T 5*20 L 250V	
0	IC 1	50.17.7273	ACT273	.. 74 ACT 273 .	
0	IC 2	50.13.0202	CS8412	IC CS 8412-CP ,A	
0	IC 3	50.11.0159	MAX1232	IC MAX 1232 CPA, DS 1232	
0	IC 4	50.14.2103	HY93C46S	EEPROM 64 * 16, serial	
0	IC 5	50.11.1002	LM360	High speed Comparator	
0	IC 6	50.06.0245	74LS245	IC SN 74 LS 245 N TTL-3	
0	IC 7	89.10.0002		DLR 6000 (LWL - MODUL) ,A	
0	IC 8	1.940.940.20		SW 500 MADI (50.14.2002)	
0	IC 9	50.14.0133	5565	IC HM 6264LP-15 ,A	
0	IC 10	50.63.4002	XC3030A-7	LCA 3000 / 3000 PLCC84	
0	IC 11	50.63.1702	CY7C130	Dualport SRAM, 1K*8	
0	IC 12	50.63.0009	80C652	MPU 8bit	
0	IC 13	50.17.0574	74HCT574	IC .. 74 HCT574 ., ,A	
0	IC 14	50.06.1576	74ALS576	Octal D-Type FF, tri	
0	IC 15	50.06.1576	74ALS576	Octal D-Type FF, tri	
0	IC 16	not used	MAX9685	ECL Comparator, latching	
0	IC 17	50.16.0201	SCC2691	IC SCC 2691 AE 1 N 24 ,A	
0	IC 18	50.17.5652	74AC652	Octal Bus Reg/Transceiver	
0	IC 19	50.14.1009	7C128A	SRAM 2K*8 35ns	
0	IC 20	50.17.0573	74HCT573	IC .. 74 HCT573 ., ,A	
0	IC 21	50.17.1574	74HC574	IC .. 74 HC 574 ., ,A	
0	IC 22	50.17.1594	74HC594	IC .. 74 HC 594 ., ,A	
0	IC 23	1.940.941.21		SW 500 MADIIN (50.14.1501)	
0	IC 24	50.17.1595	74HC595	IC .. 74 HC 595 ., ,A	
0	IC 25	50.15.0121	75174	IC SN 75174 N	
0	IC 26	50.17.1589	74HC589	MC 74 HC 589 N	
0	IC 27	50.17.1589	74HC589	MC 74 HC 589 N	
0	IC 28	not used	MAX9685	ECL Comparator, latching	
0	IC 29	50.17.1004	74HC04	IC .. 74 HC 04 ., ,A	
0	IC 30	50.10.0124	MAX660	V-Converter ... +5.5V to -5.5V	
0	IC 31	50.15.0114	9637	Dual diff Line Receiver	
0	J 3	54.01.0021	Jumper	0.63 * 0.63mm	
0	J 4	54.01.0021	Jumper	0.63 * 0.63mm	
0	L 1	62.02.3101	100uH	10%, radial RM 5	
0	L 2	62.02.3100	10uH	10%, radial RM 5	
0	L 3	62.02.3100	10uH	10%, radial RM 5	
0	L 4	62.02.3220	22uH	10%, radial RM 5	
0	L 5	62.03.0001	10uH	1A Toroid Choke	
0	L 6	62.02.3100	10uH	10%, radial RM 5	
0	L 7	not used	10uH	10%, radial RM 5	
0	L 8	not used	10uH	10%, radial RM 5	
0	L 9	not used	10uH	10%, radial RM 5	
0	L 10	not used	10uH	10%, radial RM 5	
0	L 11	not used	10uH	10%, radial RM 5	
0	MP 1	1.940.500.11		D19M MADI PCB	
0	MP 2	1.010.057.43		Baugruppenschild	
0	MP 3	43.01.0108	Label	ESE-WARNSCHILD	
0	MP 5	1.010.117.51		TEXT-ETIK. 5*20 (T1.60A)	
0	MP 7	1.010.015.50	Spacer	ISOLIER-SCHEIBE ZU T0 5	
0	MP 8	89.01.1499 3 pcs		ISOLIER-PLATTE	
0	MP 10	1.940.510.01 1 pce		FRONTPLATTE	
0	MP 11	1.940.600.04 1 pce		GRIFFEINLAGE 4TE	
0	MP 12	49.02.0520 2 pcs	M2.5*12	Rändelschraube (Rack)	
0	MP 13	49.02.0521 2 pcs		Metall-Buchse (Rack)	
0	MP 14	49.02.0522 2 pcs		Kartenhalter (Rack)	
0	MP 15	49.02.0523 1 pcs	M2.5*7	Senk-Schr, KS, Senkripp	
0	MP 16	49.02.0504 1 pce	4TE	Frontplatten-Griff	
0	MP 17	21.53.0279 2 pcs	M2.5*6	Z-Schraube Inbus Zn gb chr	
0	MP 18	21.53.0284 1 pce	M2.5*16	Z-Schraube Inbus Zn gb chr	
0	MP 19	28.99.0119 2 pcs		ROHRNIETE D 2.5*0.15* 9	
0	MP 20	1.101.001.21 1 pce		TEXT-ETIK. 5*20 HARDWARE -21	
0	P 1	54.11.2009	96p	EU-R 3*32p	
0	P 2	54.01.0020	1p	Pin 0.63*0.63	
0	P 3	54.01.0020	1p	Pin 0.63*0.63	
0	P 4	54.01.0020	1p	Pin 0.63*0.63	
0	P 5	54.01.0020	1p	Pin 0.63*0.63	
0	P 6	54.01.0020	1p	Pin 0.63*0.63	
0	P 7	54.01.0020	1p	Pin 0.63*0.63	
0	P 8	54.01.0020	1p	Pin 0.63*0.63	
0	P 9	54.01.0020	1p	Pin 0.63*0.63	
0	P 10	54.01.0020	1p	Pin 0.63*0.63	
0	P 11	54.01.0020	1p	Pin 0.63*0.63	
0	P 12	54.02.0320	1p	Flatpin, 2.8*0.8mm	
0	P 13	54.02.0320	1p	Flatpin, 2.8*0.8mm	
0	P 14	54.01.0020	1p	Pin 0.63*0.63	

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	P 15	54.01.0020	1p	Pin 0.63*0.63	
0	R 1	57.11.3102	1k0	MF, 1%, 0207	
0	R 2	57.11.3102	1k0	MF, 1%, 0207	
0	R 3	57.11.3103	10k	MF, 1%, 0207	
0	R 4	57.11.3103	10k	MF, 1%, 0207	
0	R 5	57.11.3271	270R	MF, 1%, 0207	
0	R 6	57.11.3150	15R	MF, 1%, 0207	
0	R 7	57.11.3103	10k	MF, 1%, 0207	
0	R 8	57.11.3103	10k	MF, 1%, 0207	
0	R 9	57.11.3102	1k0	MF, 1%, 0207	
0	R 10	57.11.3102	1k0	MF, 1%, 0207	
0	R 11	57.11.3102	1k0	MF, 1%, 0207	
0	R 12	57.11.3103	1k0	MF, 1%, 0207	
0	R 13	57.11.3471	470R	MF, 1%, 0207	
0	R 14	57.11.3271	270R	MF, 1%, 0207	
0	R 15	57.11.3150	15R	MF, 1%, 0207	
0	R 16	not used	470R	MF, 1%, 0207	
0	R 17	57.11.3103	10k	MF, 1%, 0207	
0	R 18	57.11.3102	1k0	MF, 1%, 0207	
0	R 19	not used	75R	MF, 1%, 0204	
0	R 20	not used	75R	MF, 1%, 0204	
0	R 21	not used	330R	MF, 1%, 0204	
0	R 22	not used	150R	MF, 1%, 0204	
0	R 23	not used	75R	MF, 1%, 0204	
0	R 24	not used	1k2	MF, 1%, 0204	
0	R 25	not used	330R	MF, 1%, 0204	
0	R 26	57.11.3102	1k0	MF, 1%, 0204	
0	R 27	not used	330R	MF, 1%, 0204	
0	R 28	not used	75R	MF, 1%, 0204	
0	R 29	57.11.3103	10k	MF, 1%, 0207	
0	R 30	not used	470R	MF, 1%, 0204	
0	R 31	57.11.3102	1k0	MF, 1%, 0207	
0	R 32	57.11.3105	1M0	MF, 1%, 0207	
0	R 33	57.11.3102	1k0	MF, 1%, 0207	
0	R 34	57.11.3102	1k0	MF, 1%, 0204	
0	R 35	not used	470R	MF, 1%, 0204	
0	R 36	57.11.3102	1k0	MF, 1%, 0207	
0	R 37	57.11.3102	1k0	MF, 1%, 0207	
0	RZ 1	57.88.4102	1k0	8*R Resistor-Netw 2% SIP9	
0	RZ 2	57.88.4102	1k0	8*R Resistor-Netw 2% SIP9	
0	RZ 3	57.88.4103	10k	8*R Resistor-Netw 2% SIP9	
0	RZ 4	57.88.4333	33k	8*R Resistor-Netw 2% SIP9	
0	S 1	55.03.0122	1*a	S 1 TASTE, 1*A, PRINT,IMPULS	
0	T 1	63.15.0021		RF - Trafo	
0	T 2	not used		IMPULSTRANSFORMATOR	
0	T 3	not used		IMPULSTRANSFORMATOR	
0	XDL 1	50.20.2501	Spacer	LED-Sockel	
0	XDL 2	50.20.2501	Spacer	LED-Sockel	
0	XDL 3	50.20.2501	Spacer	LED-Sockel	
0	XF 1	53.03.0118		XF 5 * 20, PRINT-LIEGEND	
0	XIC 8	53.03.0173	28p	DIL 0.6", löt, gerade	
0	XIC 10	53.03.2284	PLCC84p	PLCC-Socket 84p	
0	XIC 11	53.03.2252	PLCC52p	PLCC-Socket 52p	
0	XIC 12	53.03.2244	PLCC44p	PLCC-Socket 44p	
0	XIC 14	53.03.0165	20p	DIL 0.3", löt, gerade	
0	XIC 15	53.03.0165	20p	DIL 0.3", löt, gerade	
0	XIC 23	53.03.0166	8p	DIL 0.3", löt, gerade	
0	XIC 25	53.03.0168	16p	DIL 0.3", löt, gerade	
0	XIC 31	53.03.0166	8p	DIL 0.3", löt, gerade	
0	Y 1	89.01.1013	12.500MHz	12.500 000 MHz, HC 49/U	
0	Y 2	89.01.1014	12.000MHz	12.000 000 MHz, HC 49/U	
0	Y 3	89.01.1002	3.686MHz	3.686 400 MHz, HC 18/U	

———————————— End of List ————————————

Comments:

D19M C4 DA Board   1.940.570.21

STUDER

D19M C4 DA Board 1.940.570.21

© 18.06.96 / ZT	① 06.08.96 / ZT			
		D19M		PAGE 2 / 5

STUDER — D19M C4 DA Board — SC 1.940.570.20

D19M C4 DA Board 1.940.570.21

STUDER

D19M C4 DA Board   1.940.570.21

® 18.06.96 / ZT	① 06.08.96 / ZT	○	○	○	
			D19M		PAGE 4 / 5
STUDER		D19M C4 DA Board		SC	1.940.570.20

D19M C4 DA Board   1.940.570.21

CH1

CH2

CH3

CH4

ⓓ 18.06.96 / ZT	① 06.08.96 / ZT	○		○	○	
			D19M		PAGE	5 / 5
STUDER		D19M C4 DA Board			SC	1.940.570.20

DI9M C4 DA Board   1.940.570.21

D19M C4 DA Board 1.940.570.21
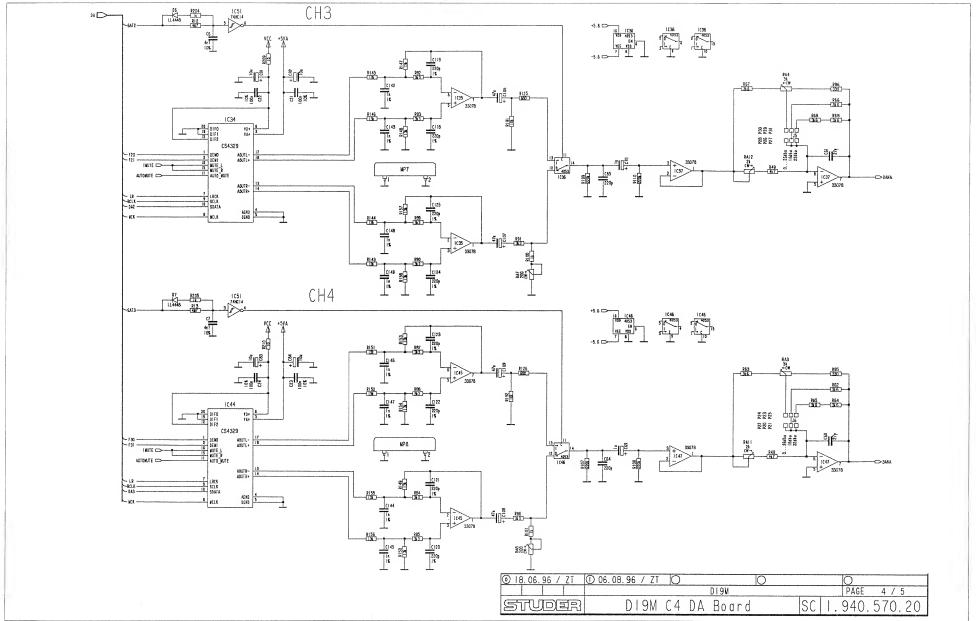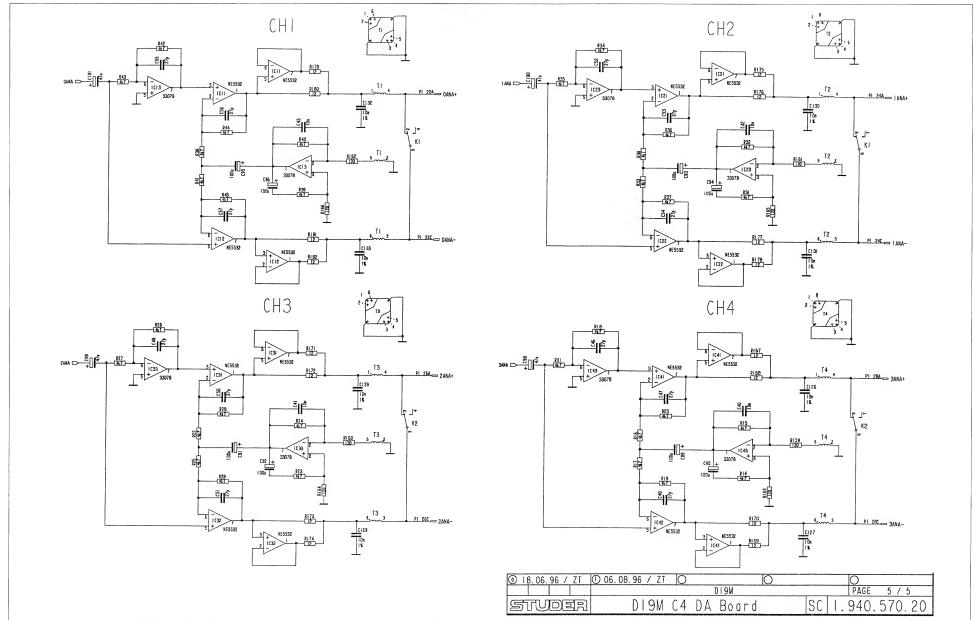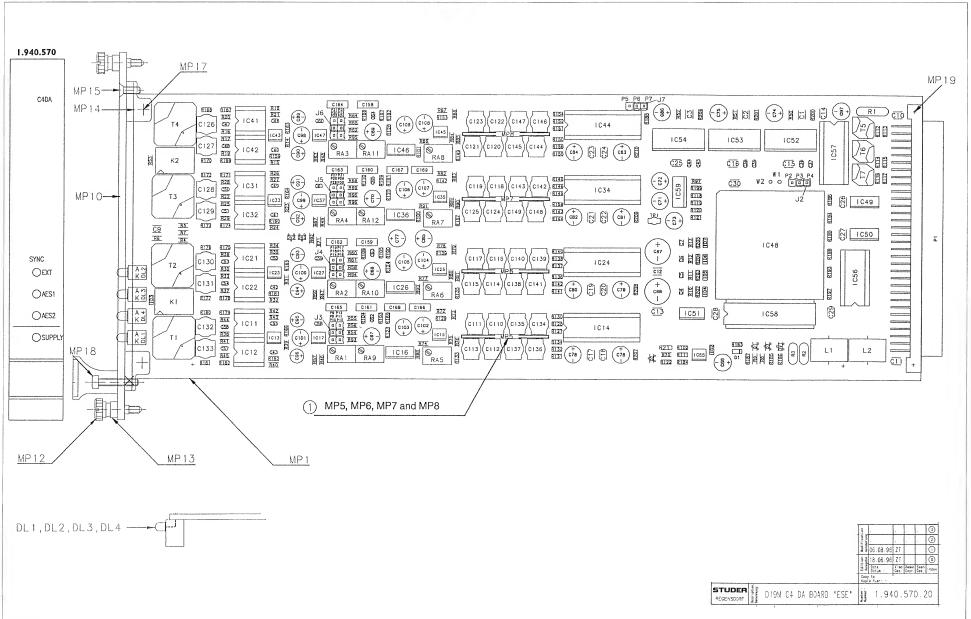
Idx.	Pos.	Part No.	Qty.	Type/Val.	Description	Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	C 1	59.60.1473		47n	CER 63V, 10%, X7R, 1210	0	C 93	59.22.4002		100uF	EL 16V, 20%, RM5
0	C 2	59.60.1473		47n	CER 63V, 10%, X7R, 1210	0	C 94	59.22.4002		100uF	EL 16V, 20%, RM5
0	C 3	59.60.1473		47n	CER 63V, 10%, X7R, 1210	0	C 95	59.22.4002		100uF	EL 16V, 20%, RM5
0	C 4	59.60.1472		4n7	CER 63V, 10%, X7R, 0805	0	C 96	59.22.4002		100uF	EL 16V, 20%, RM5
0	C 5	59.60.1472		4n7	CER 63V, 10%, X7R, 0805	0	C 97	59.22.3470		47u	EL 10V, 20%, RM5
0	C 6	59.60.1472		4n7	CER 63V, 10%, X7R, 0805	0	C 98	59.22.3470		47u	EL 10V, 20%, RM5
0	C 7	59.60.1472		4n7	CER 63V, 10%, X7R, 0805	0	C 99	59.22.3470		47u	EL 10V, 20%, RM5
0	C 9	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 100	59.22.3470		47u	EL 10V, 20%, RM5
0	C 10	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 101	59.22.3470		47u	EL 10V, 20%, RM5
0	C 11	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 102	59.22.3470		47u	EL 10V, 20%, RM5
0	C 12	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 103	59.22.3470		47u	EL 10V, 20%, RM5
0	C 13	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 104	59.22.3470		47u	EL 10V, 20%, RM5
0	C 14	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 105	59.22.3470		47u	EL 10V, 20%, RM5
0	C 15	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 106	59.22.3470		47u	EL 10V, 20%, RM5
0	C 16	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 107	59.22.3470		47u	EL 10V, 20%, RM5
0	C 17	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 108	59.22.3470		47u	EL 10V, 20%, RM5
0	C 18	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 109	59.22.3470		47u	EL 10V, 20%, RM5
0	C 19	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 110	59.05.1221		220p	PP, 1%, 630V
0	C 20	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 111	59.05.1221		220p	PP, 1%, 630V
0	C 21	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 112	59.05.1221		220p	PP, 1%, 630V
0	C 22	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 113	59.05.1221		220p	PP, 1%, 630V
0	C 23	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 114	59.05.1221		220p	PP, 1%, 630V
0	C 24	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 115	59.05.1221		220p	PP, 1%, 630V
0	C 25	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 116	59.05.1221		220p	PP, 1%, 630V
0	C 26	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 117	59.05.1221		220p	PP, 1%, 630V
0	C 27	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 118	59.05.1221		220p	PP, 1%, 630V
0	C 28	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 119	59.05.1221		220p	PP, 1%, 630V
0	C 29	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 120	59.05.1221		220p	PP, 1%, 630V
0	C 30	59.60.1104		100n	CER 63V, 10%, X7R, 1210	0	C 121	59.05.1221		220p	PP, 1%, 630V
0	C 36	59.60.1103		10n	CER 63V, 10%, X7R, 0805	0	C 122	59.05.1221		220p	PP, 1%, 630V
0	C 37	59.60.1103		10n	CER 63V, 10%, X7R, 0805	0	C 123	59.05.1221		220p	PP, 1%, 630V
0	C 38	59.60.1103		10n	CER 63V, 10%, X7R, 0805	0	C 124	59.05.1221		220p	PP, 1%, 630V
0	C 39	59.60.1103		10n	CER 63V, 10%, X7R, 0805	0	C 125	59.05.1221		220p	PP, 1%, 630V
0	C 40	59.60.1103		10n	CER 63V, 10%, X7R, 0805	0	C 126	59.05.1103		10n	PP, 1%, 63V
0	C 41	59.60.1103		10n	CER 63V, 10%, X7R, 0805	0	C 127	59.05.1103		10n	PP, 1%, 63V
0	C 42	59.60.1103		10n	CER 63V, 10%, X7R, 0805	0	C 128	59.05.1103		10n	PP, 1%, 63V
0	C 43	59.60.1103		10n	CER 63V, 10%, X7R, 0805	0	C 129	59.05.1103		10n	PP, 1%, 63V
0	C 44	59.60.1103		10n	CER 63V, 10%, X7R, 0805	0	C 130	59.05.1103		10n	PP, 1%, 63V
0	C 45	59.60.1103		10n	CER 63V, 10%, X7R, 0805	0	C 131	59.05.1103		10n	PP, 1%, 63V
0	C 46	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 132	59.05.1103		10n	PP, 1%, 63V
0	C 47	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 133	59.05.1103		10n	PP, 1%, 63V
0	C 48	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 134	59.05.1102		1n0	PP, 1%, 630V
0	C 49	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 135	59.05.1102		1n0	PP, 1%, 630V
0	C 50	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 136	59.05.1102		1n0	PP, 1%, 630V
0	C 51	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 137	59.05.1102		1n0	PP, 1%, 630V
0	C 52	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 138	59.05.1102		1n0	PP, 1%, 630V
0	C 53	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 139	59.05.1102		1n0	PP, 1%, 630V
0	C 54	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 140	59.05.1102		1n0	PP, 1%, 630V
0	C 55	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 141	59.05.1102		1n0	PP, 1%, 630V
0	C 56	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 142	59.05.1102		1n0	PP, 1%, 630V
0	C 57	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 143	59.05.1102		1n0	PP, 1%, 630V
0	C 58	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 144	59.05.1102		1n0	PP, 1%, 630V
0	C 59	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 145	59.05.1102		1n0	PP, 1%, 630V
0	C 60	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 146	59.05.1102		1n0	PP, 1%, 630V
0	C 61	59.60.0270		27p	CER 63V, 5%, C0G, 0805	0	C 147	59.05.1102		1n0	PP, 1%, 630V
0	C 62	59.60.0221		220p	CER 63V, 5%, C0G, 0805	0	C 148	59.05.1102		1n0	PP, 1%, 630V
0	C 63	59.60.0221		220p	CER 63V, 5%, C0G, 0805	0	C 149	59.05.1102		1n0	PP, 1%, 630V
0	C 64	59.60.0221		220p	CER 63V, 5%, C0G, 0805	0	C 158	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 65	59.60.0221		220p	CER 63V, 5%, C0G, 0805	0	C 159	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 66	59.22.8479		4u7	EL 50V, 20%, RM5	0	C 160	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 67	59.22.8109		1u	EL 50V, 20%, RM5	0	C 161	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 68	59.22.8109		1u	EL 50V, 20%, RM5	0	C 162	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 69	59.22.8109		1u	EL 50V, 20%, RM5	0	C 163	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 70	59.22.8109		1u	EL 50V, 20%, RM5	0	C 164	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 71	59.22.6100		10u	EL 35V, 20%, RM5	0	C 165	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 72	59.22.6100		10u	EL 35V, 20%, RM5	0	C 166	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 73	59.22.6100		10u	EL 35V, 20%, RM5	0	C 167	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 74	59.22.6100		10u	EL 35V, 20%, RM5	0	C 168	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 75	59.22.6100		10u	EL 35V, 20%, RM5	0	C 169	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 76	59.22.6100		10u	EL 35V, 20%, RM5						
0	C 77	59.22.6100		10u	EL 35V, 20%, RM5	0	D 1	50.60.8001		4448	200mA 75V 4ns SOD 80
0	C 78	59.22.6100		10u	EL 35V, 20%, RM5	0	D 2	50.60.8001		4448	200mA 75V 4ns SOD 80
0	C 79	59.22.6100		10u	EL 35V, 20%, RM5	0	D 3	50.60.8001		4448	200mA 75V 4ns SOD 80
0	C 80	59.22.6100		10u	EL 35V, 20%, RM5	0	D 4	50.60.8001		4448	200mA 75V 4ns SOD 80
0	C 81	59.22.6100		10u	EL 35V, 20%, RM5	0	D 5	50.60.8001		4448	200mA 75V 4ns SOD 80
0	C 82	59.22.6100		10u	EL 35V, 20%, RM5	0	D 6	50.60.8001		4448	200mA 75V 4ns SOD 80
0	C 83	59.22.6100		10u	EL 35V, 20%, RM5	0	D 7	50.60.8001		4448	200mA 75V 4ns SOD 80
0	C 84	59.22.6100		10u	EL 35V, 20%, RM5						
0	C 85	59.22.6100		10u	EL 35V, 20%, RM5	0	DL 1	50.04.2202		HLMP1790	DL HLMP - 1790 GN
0	C 86	59.22.6100		10u	EL 35V, 20%, RM5	0	DL 2	50.04.2202		HLMP1790	DL HLMP - 1790 GN
0	C 87	59.22.5101		100u	EL 25V, 20%, RM5	0	DL 3	50.04.2202		HLMP1790	DL HLMP - 1790 GN
0	C 88	59.22.5101		100u	EL 25V, 20%, RM5	0	DL 4	50.04.2202		HLMP1790	DL HLMP - 1790 GN
0	C 89	59.22.4002		100uF	EL 16V, 20%, RM5						
0	C 90	59.22.4002		100uF	EL 16V, 20%, RM5	0	DV 1	50.60.9026		24V	5%, 0.2W, SOT 23
0	C 91	59.22.4002		100uF	EL 16V, 20%, RM5	0	DV 2	50.60.9011		5V6	5%, 0.2W, SOT 23
0	C 92	59.22.4002		100uF	EL 16V, 20%, RM5	0	DV 3	50.60.9011		5V6	5%, 0.2W, SOT 23

STUDER

D19M C4 DA Board 1.940.570.21

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	IC 11	50.09.0106		5532AN	IC NE 5532 AN, NE 5532 AN, ,A
0	IC 12	50.09.0106		5532AN	IC NE 5532 AN, NE 5532 AN, ,A
0	IC 13	50.61.0204		MC33078	Dual Op-Amp low noise
0	IC 14	50.19.0116		CS4390	D/A Converter 24bit stereo
0	IC 15	50.61.0204		MC33078	Dual Op-Amp low noise
0	IC 16	50.62.8053		HC4053	Tripple 2ch analog mux/demux
0	IC 17	50.61.0204		MC33078	Dual Op-Amp low noise
0	IC 21	50.09.0106		5532AN	IC NE 5532 AN, NE 5532 AN, ,A
0	IC 22	50.09.0106		5532AN	IC NE 5532 AN, NE 5532 AN, ,A
0	IC 23	50.61.0204		MC33078	Dual Op-Amp low noise
0	IC 24	50.19.0116		CS4390	D/A Converter 24bit stereo
0	IC 25	50.61.0204		MC33078	Dual Op-Amp low noise
0	IC 26	50.62.8053		HC4053	Tripple 2ch analog mux/demux
0	IC 27	50.61.0204		MC33078	Dual Op-Amp low noise
0	IC 31	50.09.0106		5532AN	IC NE 5532 AN, NE 5532 AN, ,A
0	IC 32	50.09.0106		5532AN	IC NE 5532 AN, NE 5532 AN, ,A
0	IC 33	50.61.0204		MC33078	Dual Op-Amp low noise
0	IC 34	50.19.0116		CS4390	D/A Converter 24bit stereo
0	IC 35	50.61.0204		MC33078	Dual Op-Amp low noise
0	IC 36	50.62.8053		HC4053	Tripple 2ch analog mux/demux
0	IC 37	50.61.0204		MC33078	Dual Op-Amp low noise
0	IC 41	50.09.0106		5532AN	IC NE 5532 AN, NE 5532 AN, ,A
0	IC 42	50.09.0106		5532AN	IC NE 5532 AN, NE 5532 AN, ,A
0	IC 43	50.61.0204		MC33078	Dual Op-Amp low noise
0	IC 44	50.19.0116		CS4390	D/A Converter 24bit stereo
0	IC 45	50.61.0204		MC33078	Dual Op-Amp low noise
0	IC 46	50.62.8053		HC4053	Tripple 2ch analog mux/demux
0	IC 47	50.61.0204		MC33078	Dual Op-Amp low noise
0	IC 48	1.940.970.20			SW 570 MICODAC (50.63.4205)
0	IC 49	50.62.3166		74HCT166	8bit parallel in/serial out
0	IC 50	50.62.3166		74HCT166	8bit parallel in/serial out
0	IC 51	50.62.1014		74HC 14	Hey Schmitt trigger inverter
0	IC 52	50.62.0913		CS8412	AES-Receiver
0	IC 53	50.62.0913		CS8412	AES-Receiver
0	IC 54	50.62.0913		CS8412	AES-Receiver
0	IC 55	50.61.9001		LM393	Dual voltage comp. SO 8
0	IC 56	50.17.7014		ACT14	.. 74 ACT 14 .
0	IC 57	50.15.0128		34C86	IC DS 34 C 86 TN, MC34C86P ,A
0	IC 58	50.14.1009		7C128A	SRAM 2K*8 35ns
0	IC 59	50.10.0104		LM317SP	IC LM 317 SP, ..T,
0	J 2	54.01.0021		Jumper	0.63 * 0.63mm
0	J 3	54.01.0021		Jumper	0.63 * 0.63mm
0	J 4	54.01.0021		Jumper	0.63 * 0.63mm
0	J 5	54.01.0021		Jumper	0.63 * 0.63mm
0	J 6	54.01.0021		Jumper	0.63 * 0.63mm
0	J 7	54.01.0021		Jumper	0.63 * 0.63mm
0	K 1	56.04.0197		2u	24V 125V 2A Ag/Au
0	K 2	56.04.0197		2u	24V 125V 2A Ag/Au
0	L 1	62.03.0010		48uH	2A Toroid Chocke
0	L 2	62.03.0010		48uH	2A Toroid Chocke
0	MP 1	1.940.570.12			D19M C4 DA BOARD PCB
0	MP 2	1.940.570.04			TYPENSCHILD
0	MP 3	43.01.0108		Label	ESE-WARNSCHILD
0	MP 4	1.101.001.21			TEXT-ETIK. 5*20 HARDWARE -21
0	MP 5	1.940.570.02			Abschirmblech
0	MP 6	1.940.570.02			Abschirmblech
0	MP 7	1.940.570.02			Abschirmblech
0	MP 8	1.940.570.02			Abschirmblech
0	MP 10	1.940.570.01	1 pce		FRONTPLATTE
0	MP 11	1.940.600.04	1 pce		GRIFFEINLAGE 4TE
0	MP 12	49.02.0520	2 pcs	M2.5*12	Rändelschraube (Rack)
0	MP 13	49.02.0521	2 pcs		Metall-Buchse (Rack)
0	MP 14	49.02.0522	2 pcs		Kartenhalter (Rack)
0	MP 15	49.02.0523	1 pce	M2.5*7	Senk-Schr, KS, Senkripp
0	MP 16	49.02.0504	1 pce	4TE	Frontplatten-Griff
0	MP 17	21.53.0279	2 pcs	M2.5*6	Z-Schraube Inbus Zn gb chr
0	MP 18	21.53.0284	1 pce	M2.5*16	Z-Schraube Inbus Zn gb chr
0	MP 19	28.99.0119	2 pcs		ROHRNIETE D 2.5*0.15* 9
0	P 1	54.11.2009	1 pce	96p	EU-R 3*32p
0	P 2	54.01.0020	1 pce	1p	Pin 0.63*0.63
0	P 3	54.01.0020	1 pce	1p	Pin 0.63*0.63
0	P 4	54.01.0020	1 pce	1p	Pin 0.63*0.63
0	P 5	54.01.0020	1 pce	1p	Pin 0.63*0.63
0	P 6	54.01.0020	1 pce	1p	Pin 0.63*0.63
0	P 7	54.01.0020	1 pce	1p	Pin 0.63*0.63
0	P 8	54.11.0136	1 pce	2*3p	Pin 0.63*0.63, RM2.54
0	P 9	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 10	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 11	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 12	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 13	54.01.0020	0 pce	1p	Pin 0.63*0.63

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	P 14	54.11.0136	1 pce	2*3p	Pin 0.63*0.63, RM2.54
0	P 15	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 16	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 17	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 18	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 19	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 20	54.11.0136	1 pce	2*3p	Pin 0.63*0.63, RM2.54
0	P 21	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 22	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 23	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 24	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 25	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 26	54.11.0136	1 pce	2*3p	Pin 0.63*0.63, RM2.54
0	P 27	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 28	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 29	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 30	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	P 31	54.01.0020	0 pce	1p	Pin 0.63*0.63
0	Q 1	50.60.1001		BC857B	PNP 45V 100mA SOT 23
0	Q 2	50.60.1001		BC857B	PNP 45V 100mA SOT 23
0	Q 3	50.60.0001		BC847B	NPN 45V 100mA SOT 23
0	R 1	57.92.7053		1.6A	POLY- PTC, 30V
0	R 2	57.92.7019		0.4A	POLY- PTC, 60V
0	R 3	57.92.7019		0.4A	POLY- PTC, 60V
0	R 4	57.60.1821		820R	MF, 1%, 0204, E24
0	R 5	57.60.1821		820R	MF, 1%, 0204, E24
0	R 6	57.60.1821		820R	MF, 1%, 0204, E24
0	R 7	57.60.1821		820R	MF, 1%, 0204, E24
0	R 8	57.60.1683		68K	MF, 1%, 0204, E24
0	R 9	57.60.1562		5K6	MF, 1%, 0204, E24
0	R 10	57.60.1475		4M7	MF, 1%, 0204, E24
0	R 11	57.60.1475		4M7	MF, 1%, 0204, E24
0	R 12	57.60.1475		4M7	MF, 1%, 0204, E24
0	R 13	57.60.1475		4M7	MF, 1%, 0204, E24
0	R 14	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 15	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 16	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 17	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 18	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 19	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 20	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 21	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 22	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 23	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 24	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 25	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 26	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 27	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 28	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 29	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 30	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 31	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 32	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 33	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 34	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 35	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 36	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 37	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 38	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 39	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 40	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 41	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 42	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 43	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 44	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 45	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 46	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 47	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 48	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 49	57.60.1472		4K7	MF, 1%, 0204, E24
0	R 50	57.60.1470		47R	MF, 1%, 0204, E24
0	R 51	57.60.1470		47R	MF, 1%, 0204, E24
0	R 52	57.60.1470		47R	MF, 1%, 0204, E24
0	R 53	57.60.1391		390R	MF, 1%, 0204, E24
0	R 54	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 55	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 56	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 57	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 58	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 59	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 60	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 61	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 62	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 63	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 64	57.60.1362		3K6	MF, 1%, 0204, E24

D19M C4 DA Board   1.940.570.21

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	R 65	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 66	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 67	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 68	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 69	57.60.1362		3K6	MF, 1%, 0204, E24
0	R 70	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 71	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 72	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 73	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 74	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 75	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 76	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 77	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 78	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 79	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 80	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 81	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 82	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 83	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 84	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 85	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 86	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 87	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 88	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 89	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 90	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 91	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 92	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 93	57.60.1331		330R	MF, 1%, 0204, E24
0	R 94	57.60.1331		330R	MF, 1%, 0204, E24
0	R 95	57.60.1331		330R	MF, 1%, 0204, E24
0	R 96	57.60.1331		330R	MF, 1%, 0204, E24
0	R 97	57.60.1302		3K0	MF, 1%, 0204, E24
0	R 98	57.60.1102		1K	MF, 1%, 0204, E24
0	R 99	57.60.1102		1K	MF, 1%, 0204, E24
0	R 100	57.60.1102		1K	MF, 1%, 0204, E24
0	R 101	57.60.1102		1K	MF, 1%, 0204, E24
0	R 102	57.60.1332		3K3	MF, 1%, 0204, E24
0	R 103	57.60.1224		220K	MF, 1%, 0204, E24
0	R 104	57.60.1224		220K	MF, 1%, 0204, E24
0	R 105	57.60.1224		220K	MF, 1%, 0204, E24
0	R 106	57.60.1224		220K	MF, 1%, 0204, E24
0	R 107	57.60.1224		220K	MF, 1%, 0204, E24
0	R 108	57.60.1224		220K	MF, 1%, 0204, E24
0	R 109	57.60.1224		220K	MF, 1%, 0204, E24
0	R 110	57.60.1224		220K	MF, 1%, 0204, E24
0	R 111	57.60.1223		22K	MF, 1%, 0204, E24
0	R 112	57.60.1221		220R	MF, 1%, 0204, E24
0	R 113	57.60.1221		220R	MF, 1%, 0204, E24
0	R 114	57.60.1221		220R	MF, 1%, 0204, E24
0	R 115	57.60.1221		220R	MF, 1%, 0204, E24
0	R 116	57.60.1221		220R	MF, 1%, 0204, E24
0	R 117	57.60.1221		220R	MF, 1%, 0204, E24
0	R 118	57.60.1201		200R	MF, 1%, 0204, E24
0	R 119	57.60.1201		200R	MF, 1%, 0204, E24
0	R 120	57.60.1201		200R	MF, 1%, 0204, E24
0	R 121	57.60.1201		200R	MF, 1%, 0204, E24
0	R 122	57.60.1153		15K	MF, 1%, 0204, E24
0	R 123	57.60.1681		680R	MF, 1%, 0204, E24
0	R 124	57.60.1681		680R	MF, 1%, 0204, E24
0	R 125	57.60.1681		680R	MF, 1%, 0204, E24
0	R 126	57.60.1681		680R	MF, 1%, 0204, E24
0	R 127	57.60.1133		13K	MF, 1%, 0204, E24
0	R 128	57.60.1133		13K	MF, 1%, 0204, E24
0	R 129	57.60.1133		13K	MF, 1%, 0204, E24
0	R 130	57.60.1133		13K	MF, 1%, 0204, E24
0	R 131	57.60.1133		13K	MF, 1%, 0204, E24
0	R 132	57.60.1133		13K	MF, 1%, 0204, E24
0	R 133	57.60.1133		13K	MF, 1%, 0204, E24
0	R 134	57.60.1133		13K	MF, 1%, 0204, E24
0	R 135	57.60.1133		13K	MF, 1%, 0204, E24
0	R 136	57.60.1133		13K	MF, 1%, 0204, E24
0	R 137	57.60.1133		13K	MF, 1%, 0204, E24
0	R 138	57.60.1133		13K	MF, 1%, 0204, E24
0	R 139	57.60.1133		13K	MF, 1%, 0204, E24
0	R 140	57.60.1133		13K	MF, 1%, 0204, E24
0	R 141	57.60.1133		13K	MF, 1%, 0204, E24
0	R 142	57.60.1133		13K	MF, 1%, 0204, E24
0	R 143	57.60.1133		13K	MF, 1%, 0204, E24
0	R 144	57.60.1133		13K	MF, 1%, 0204, E24
0	R 145	57.60.1133		13K	MF, 1%, 0204, E24
0	R 146	57.60.1133		13K	MF, 1%, 0204, E24
0	R 147	57.60.1133		13K	MF, 1%, 0204, E24
0	R 148	57.60.1133		13K	MF, 1%, 0204, E24
0	R 149	57.60.1133		13K	MF, 1%, 0204, E24
0	R 150	57.60.1133		13K	MF, 1%, 0204, E24
0	R 151	57.60.1133		13K	MF, 1%, 0204, E24
0	R 152	57.60.1133		13K	MF, 1%, 0204, E24
0	R 153	57.60.1133		13K	MF, 1%, 0204, E24
0	R 154	57.60.1133		13K	MF, 1%, 0204, E24
0	R 155	57.60.1133		13K	MF, 1%, 0204, E24
0	R 156	57.60.1133		13K	MF, 1%, 0204, E24
0	R 157	57.60.1133		13K	MF, 1%, 0204, E24
0	R 158	57.60.1133		13K	MF, 1%, 0204, E24
0	R 159	57.60.1131		130R	MF, 1%, 0204, E24
0	R 160	57.60.1131		130R	MF, 1%, 0204, E24
0	R 161	57.60.1131		130R	MF, 1%, 0204, E24
0	R 162	57.60.1131		130R	MF, 1%, 0204, E24
0	R 163	57.60.1121		120R	MF, 1%, 0204, E24
0	R 164	57.60.1121		120R	MF, 1%, 0204, E24
0	R 165	57.60.1121		120R	MF, 1%, 0204, E24
0	R 166	57.60.1121		120R	MF, 1%, 0204, E24
0	R 167	57.60.1120		12R	MF, 1%, 0204, E24
0	R 168	57.60.1120		12R	MF, 1%, 0204, E24
0	R 169	57.60.1120		12R	MF, 1%, 0204, E24
0	R 170	57.60.1120		12R	MF, 1%, 0204, E24
0	R 171	57.60.1120		12R	MF, 1%, 0204, E24
0	R 172	57.60.1120		12R	MF, 1%, 0204, E24
0	R 173	57.60.1120		12R	MF, 1%, 0204, E24
0	R 174	57.60.1120		12R	MF, 1%, 0204, E24
0	R 175	57.60.1120		12R	MF, 1%, 0204, E24
0	R 176	57.60.1120		12R	MF, 1%, 0204, E24
0	R 177	57.60.1120		12R	MF, 1%, 0204, E24
0	R 178	57.60.1120		12R	MF, 1%, 0204, E24
0	R 179	57.60.1120		12R	MF, 1%, 0204, E24
0	R 180	57.60.1120		12R	MF, 1%, 0204, E24
0	R 181	57.60.1120		12R	MF, 1%, 0204, E24
0	R 182	57.60.1120		12R	MF, 1%, 0204, E24
0	R 183	57.60.1104		100K	MF, 1%, 0204, E24
0	R 184	57.60.1104		100K	MF, 1%, 0204, E24
0	R 185	57.60.1103		10K	MF, 1%, 0204, E24
0	R 186	57.60.1103		10K	MF, 1%, 0204, E24
0	R 187	57.60.1103		10K	MF, 1%, 0204, E24
0	R 188	57.60.1103		10K	MF, 1%, 0204, E24
0	R 189	57.60.1103		10K	MF, 1%, 0204, E24
0	R 190	57.60.1103		10K	MF, 1%, 0204, E24
0	R 191	57.60.1103		10K	MF, 1%, 0204, E24
0	R 192	57.60.1103		10K	MF, 1%, 0204, E24
0	R 193	57.60.1103		10K	MF, 1%, 0204, E24
0	R 194	57.60.1103		10K	MF, 1%, 0204, E24
0	R 195	57.60.1103		10K	MF, 1%, 0204, E24
0	R 196	57.60.1103		10K	MF, 1%, 0204, E24
0	R 197	57.60.1103		10K	MF, 1%, 0204, E24
0	R 198	57.60.1103		10K	MF, 1%, 0204, E24
0	R 199	57.60.1102		1K	MF, 1%, 0204, E24
0	R 200	57.60.1102		1K	MF, 1%, 0204, E24
0	R 201	57.60.1102		1K	MF, 1%, 0204, E24
0	R 202	57.60.1102		1K	MF, 1%, 0204, E24
0	R 203	57.60.1102		1K	MF, 1%, 0204, E24
0	R 204	57.60.1102		1K	MF, 1%, 0204, E24
0	R 205	57.60.1102		1K	MF, 1%, 0204, E24
0	R 206	57.60.1102		1K	MF, 1%, 0204, E24
0	R 207	57.60.1100		10R	MF, 1%, 0204, E24
0	R 208	57.60.1100		10R	MF, 1%, 0204, E24
0	R 209	57.60.1100		10R	MF, 1%, 0204, E24
0	R 210	57.60.1100		10R	MF, 1%, 0204, E24
0	R 211	57.60.1103		10K	MF, 1%, 0204, E24
0	RA 1	58.05.1502		5k	10%, 0.5W, Cermet
0	RA 2	58.05.1502		5k	10%, 0.5W, Cermet
0	RA 3	58.05.1502		5k	10%, 0.5W, Cermet
0	RA 4	58.05.1502		5k	10%, 0.5W, Cermet
0	RA 5	58.05.1201		200R	10%, 0.5W, Cermet
0	RA 6	58.05.1201		200R	10%, 0.5W, Cermet
0	RA 7	58.05.1201		200R	10%, 0.5W, Cermet
0	RA 8	58.05.1201		200R	10%, 0.5W, Cermet
0	RA 9	58.05.1202		2k	10%, 0.5W, Cermet
0	RA 10	58.05.1202		2k	10%, 0.5W, Cermet
0	RA 11	58.05.1202		2k	10%, 0.5W, Cermet
0	RA 12	58.05.1202		2k	10%, 0.5W, Cermet
0	T 1	1.022.275.00			TRIFILARTRAFO OUTPUT
0	T 2	1.022.275.00			TRIFILARTRAFO OUTPUT
0	T 3	1.022.275.00			TRIFILARTRAFO OUTPUT
0	T 4	1.022.275.00			TRIFILARTRAFO OUTPUT
0	T 5	1.022.632.00		1:1	DI/DO TRANSFORMER
0	T 6	1.022.632.00		1:1	DI/DO TRANSFORMER
0	T 7	1.022.632.00		1:1	DI/DO TRANSFORMER
0	TP 1	54.02.0320		1p	PCB-Flachst 2.8*0.8, gerade

D19M C4 DA Board   1.940.570.21
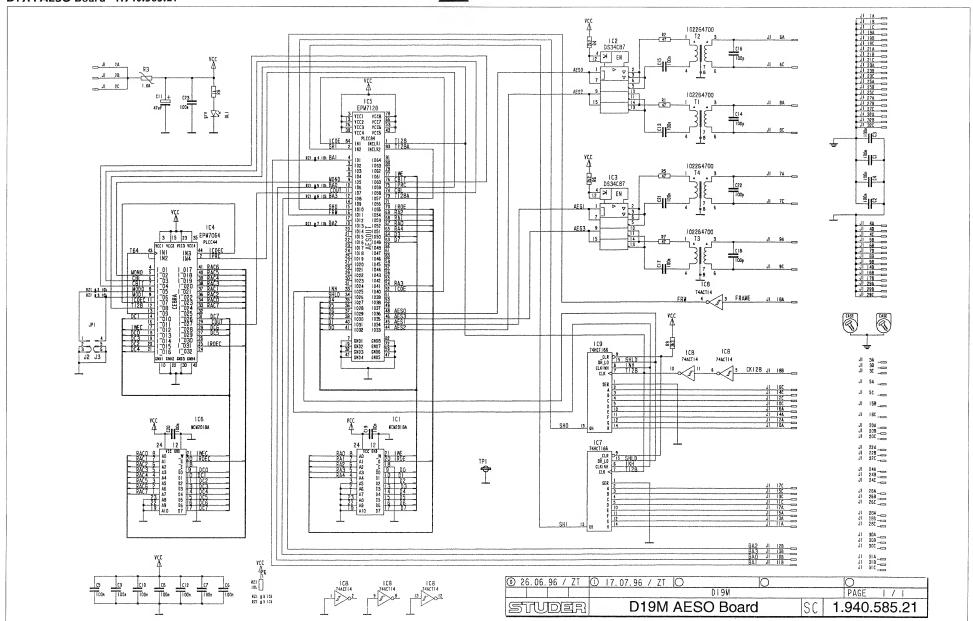
Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	XDL 1	50.20.2501		Spacer	LED-Sockel
0	XDL 2	50.20.2501		Spacer	LED-Sockel
0	XDL 3	50.20.2501		Spacer	LED-Sockel
0	XDL 4	50.20.2501		Spacer	LED-Sockel
0	XIC 11	53.03.0166		8p	DIL 0.3", löt, gerade
0	XIC 12	53.03.0166		8p	DIL 0.3", löt, gerade
0	XIC 21	53.03.0166		8p	DIL 0.3", löt, gerade
0	XIC 22	53.03.0166		8p	DIL 0.3", löt, gerade
0	XIC 31	53.03.0166		8p	DIL 0.3", löt, gerade
0	XIC 32	53.03.0166		8p	DIL 0.3", löt, gerade
0	XIC 41	53.03.0166		8p	DIL 0.3", löt, gerade
0	XIC 42	53.03.0166		8p	DIL 0.3", löt, gerade
0	XIC 48	53.03.2284		PLCC84p	PLCC-Socket 84p

———————————————— End of List ————————————————

Comments:

D19M AESO Board 1.940.585.21

STUDER
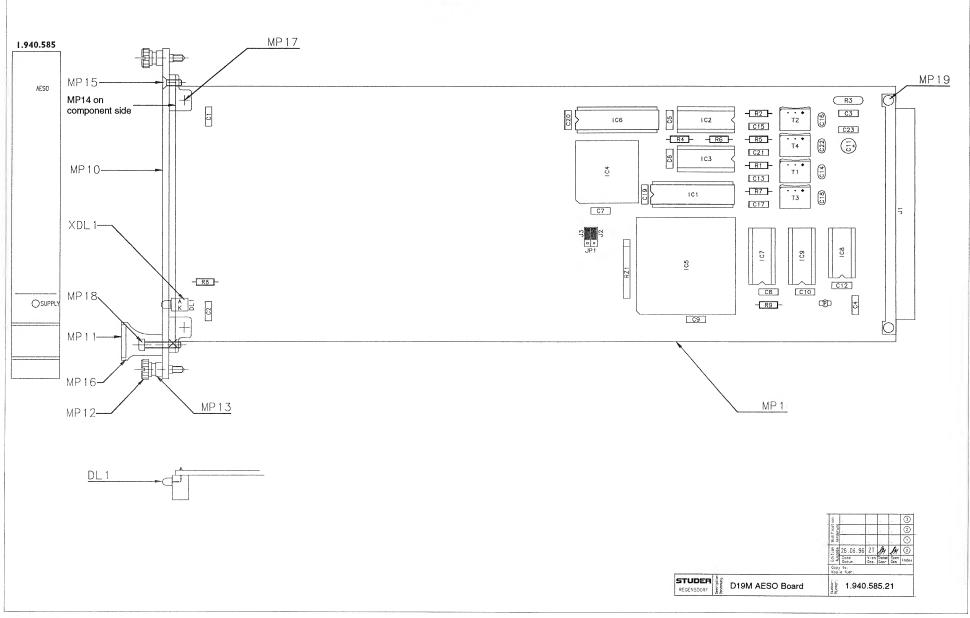
D19M AESO Board   1.940.585.21

D19M AESO Board 1.940.585.21

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	C 1	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 2	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 3	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 4	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 5	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 6	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 7	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 8	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 9	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 10	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 11	59.22.3470		47u	EL 10V, 20%, RM5
0	C 12	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 13	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 14	59.34.4101		100p	CER 63V, 5%, N750
0	C 15	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 16	59.34.4101		100p	CER 63V, 5%, N750
0	C 17	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 18	59.34.4101		100p	CER 63V, 5%, N750
0	C 19	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 20	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 21	59.06.0104		100n	PETP, 63V, 10%, RM5
0	C 22	59.34.4101		100p	CER 63V, 5%, N750
0	C 23	59.06.0104		100n	PETP, 63V, 10%, RM5
0	DL 1	50.04.2202		HLMP1790	DL HLMP - 1790 GN
0	IC 1	50.14.1009		CY7C128-35	IC MCM 2018 A - 35 ,A
0	IC 2	50.15.0127		·34C87	IC DS 34 C 87 TN, MC34C87P ,A
0	IC 3	50.15.0127		34C87	IC DS 34 C 87 TN, MC34C87P ,A
0	IC 4	1.940.962.21			SW 585 CEBRA (50.63.4202)
0	IC 5	1.940.964.20			SW 585 AESOUT (50.63.4205)
0	IC 6	50.14.1009		CY7C128-35	IC MCM 2018 A - 35 ,A
0	IC 7	50.17.0166		74HCT166	8 Bit parallel in/serial out
0	IC 8	50.17.7014		ACT14	.. 74 ACT 14 .
0	IC 9	50.17.0166		74HCT166	8 Bit parallel in/serial out
0	J 1	54.11.2009			J EU-R 3 * 32
0	J 2	54.01.0021		Jumper	0.63 * 0.63mm
0	J 3	54.01.0021		Jumper	0.63 * 0.63mm
0	JP 1	54.11.0136		2*3p	Pin 0.63*0.63, RM2.54
0	MP 1	1.940.585.12			D19M AESO BOARD PCB
0	MP 2	1.940.585.04			TYPENSCHILD
0	MP 3	43.01.0108	mp	Label	ESE-WARNSCHILD
0	MP 4	1.101.001.20	mp	Label	TEXT-ETIK. 5*20 HARDWARE -20
0	MP 10	1.940.585.01	1 pce		FRONTPLATTE
ü	MP 11	1.940.600.04	1 pce		GRIFFEINLAGE 4TE
0	MP 12	49.02.0520	2 pcs	M2.5*12	Rändelschraube (Rack)
0	MP 13	49.02.0521	2 pcs		Metall-Buchse (Rack)
0	MP 14	49.02.0522	2 pcs		Kartenhalter (Rack)
0	MP 15	49.02.0523	1 pce	M2.5*7	Senk-Schr, KS, Senkripp
0	MP 16	49.02.0504	1 pce	4TE	Frontplatten-Griff
0	MP 17	21.53.0279	2 pcs		Z - SCHR. IS , ZN , M2.5 * 6
0	MP 18	21.53.0284	1 pce		Z - SCHR. IS , ZN , M2.5 * 16
0	MP 19	28.99.0119	2 pcs		ROHRNIETE D 2.5*0.15* 9
0	R 1	57.11.3470		47R	MF, 1%, 0207
0	R 2	57.11.3470		47R	MF, 1%, 0207
0	R 3	57.92.7053		1.6A	POLY- PTC, 30V
0	R 4	57.11.3222		2k2	MF, 1%, 0207
0	R 5	57.11.3470		47R	MF, 1%, 0207
0	R 6	57.11.3222		2k2	MF, 1%, 0207
0	R 7	57.11.3470		47R	MF, 1%, 0207
0	R 8	57.11.3102		1k0	MF, 1%, 0207
0	R 9	57.11.3332		3k3	MF, 1%, 0207
0	RZ 1	57.88.4103		8*10k	2%, SIP 9
0	T 1	1.022.647.00		1:1.4	OUTPUT TRAFO AES/EBU
0	T 2	1.022.647.00		1:1.4	OUTPUT TRAFO AES/EBU
0	T 3	1.022.647.00		1:1.4	OUTPUT TRAFO AES/EBU
0	T 4	1.022.647.00		1:1.4	OUTPUT TRAFO AES/EBU
0	TP 1	54.02.0320		1p	Flatpin, 2.8*0.8mm
0	XDL 1	50.20.2501		Spacer	LED-Sockel
0	XIC 2	53.03.0168		16p	DIL 0.3", löt, gerade
0	XIC 3	53.03.0168		16p	DIL 0.3", löt, gerade
0	XIC 4	53.03.2244		PLCC44p	PLCC-Socket 44p
0	XIC 5	53.03.2284		PLCC84p	PLCC-Socket 84p

————————————— End of List —————————————

Comments:
IC-Sockel   XIC nn entsprechend den IC Nummern bestücken.
LED-Sockel XDL nn entsprechend den DL Nummern bestücken.

SCHEMATA / CIRCUIT DIAGRAMS

Connection Board S-39M C4AD / C4DA-Card 1.940.610.00

Connection Board S-39M C4AD / C4DA-Card   1.940.610.00

Änderung					③
					②
					①
Ausgabe	19.2.97				⓪
	Datum	Gez.	Gepr.	Ges.	Index
Kopie für:					

STUDER REGENSDORF ZÜRICH	Benennung: S 39 M CONNECTION UNIT	Nummer: 1.940.610 -00

Connection Board BNC AESI-Card   1.940.611.00

Connection Board BNC AESI-Card 1.940.611.00

57.11.3101 (4x)

57.11.3221 (8x)

1.940.611 – 11

54.14.2002 (2x)

59.40.0104 (4x)

54.21.2031 (4x)

62.02.3100 (4x)

59.40.0682 (4x)

28.31.0005 (3x)

1.940.611 – 01

	Änderung				③
					②
					①
Ausgabe	26.6.97		*Vf*		⓪
	Datum	Gez.	Gepr.	Ges.	Index
Kopie für:					

| STUDER REGENSDORF ZÜRICH | Benennung: BNC INPUT UNIT | Nummer: 1.940.611-00 |

Connection Board BNC AESO-Card   1.940.612.00

Connection Board BNC AESO-Card   1.940.612.00

57.11.3221 (4x)

57.11.3470 (4x)

57.11.3121 (4x)

57.11.3560 (4x)

54.14.2002 (2x)

54.21.2031 (4x)

28.31.0005 (3x)

1.940.611-01

1.940.612-11

Änderung				③
				②
				①
Ausgabe	27.6.97	2	Vf	⓪
	Datum	Gez.	Gepr.	Ges.	Index
Kopie für:				

| STUDER REGENSDORF ZÜRICH | Benennung: BNC OUTPUT UNIT | Nummer: 1.940.612-00 |

Connection Board S-30F - C4AD   1.940.613.00
Connection Board S-30M - C4AD   1.940.614.00

SIEM.-CONN. MALE/FEMALE

C: 1n

Flat cable 16p

Signal	Pin
IN/OUT CH1+	P1 1
IN/OUT CH1-	P1 2
MGND	P1 3
MGND	P1 4
IN/OUT CH2-	P1 5
IN/OUT CH2+	P1 6
NC	P1 7
NC	P1 8
NC	P1 9
NC	P1 10
IN/OUT CH4+	P1 11
IN/OUT CH4-	P1 12
MGND	P1 13
MGND	P1 14
IN/OUT CH3-	P1 15
IN/OUT CH3+	P1 16

C: 8x220p

Flat cable 16p

Signal	Pin
IN/OUT CH5+	P2 1
IN/OUT CH5-	P2 2
MGND	P2 3
MGND	P2 4
IN/OUT CH6-	P2 5
IN/OUT CH6+	P2 6
NC	P2 7
NC	P2 8
NC	P2 9
NC	P2 10
IN/OUT CH8+	P2 11
IN/OUT CH8-	P2 12
MGND	P2 13
MGND	P2 14
IN/OUT CH7-	P2 15
IN/OUT CH8+	P2 16

C: 8x220p

Signal	Pin
IN/OUT CH9+	P3 1
IN/OUT CH9-	P3 2
MGND	P3 3
MGND	P3 4
NC	P3 5
NC	P3 6
MGND	P3 7
MGND	P3
IN/OUT CH10-	P3 6
IN/OUT CH10+	P3 7

OPTIONAL C: 4x220p

C: 1n

16.7.97 GE				
PCB-S30-ANA				PAGE 1 OF 1
STUDER REGENSDORF SWITZERLAND	CONNECTION BOARD S-30F - C4AD			1.940.613
	CONNECTION BOARD S-30M - C4DA			1.940.614

Connection Board S-30F - C4AD   1.940.613.00

1.01.014-22
(8x)

54.14.7023   1.940.613-11

59.32.1102
(2x)

59.32.1221
(16x)

21.53.9354
(4x)

54.14.1032

54.14.7020   FEMALE ── F

54.14.7002

21.51.2354
(2x)

54.14.2002
(2x)

1.940.610-01

Änderung					③
					②
					①
Ausgabe 26.6.97	2	V.			⓪
Datum	Gez.	Gepr.	Ges.	Index
Kopie für:					

| STUDER REGENSDORF ZÜRICH | Benennung: S 30 F CONNECTION UNIT | Nummer: 1.940.613-00 |

Connection Board S-30M - C4AD   1.940.614.00

54.14.7020

1.940.613-11

1.01.014-22
(8x)

59.32.1102
(2x)

59.32.1221
(16x)

21.53.9354
(4x)

54.14.1022

54.14.7023   MALE — M

54.14.7002

21.51.2354
(2x)

1.940.610-01

54.14.2002
(2x)

Änderung				③
				②
				①
Ausgabe 20.6.97				⓪
Datum	Gez.	Gepr.	Ges.	Index
Kopie für:				

| STUDER REGENSDORF ZÜRICH | Benennung: S 30 M CONNECTION UNIT | Nummer: 1.940.614-00 |

Connection Board D-15F AESI-Card 1.940.615.00

Connection Board D-15F AESI-Card   1.940.615.00

Connection Board D-15F C4AD-Card   1.940.615.00

Connection Board D-15F C4AD-Card   1.940.615.00

59.34.2470
(8x)

54.13.0072

54.14.2002
(2x)

54.13.0081
(2x)

1.940.615-11

1.940.615-02

28.31.0005
(3x)

Änderung					③
					②
					①
Ausgabe	20.2.97	2	Vt		⓪
	Datum	Gez.	Gepr.	Ges.	Index
Kopie für:					

STUDER REGENSDORF ZÜRICH	Benennung: D 15 F CONNECTION UNIT	Nummer: 1.940.615-00

Connection Board D-15M AESO-Card   1.940.616.00

Connection Board D-15M AESO-Card   1.940.616.00

59.34.2470
(8 x)

54.14.2002
(2 x)

54.13.0077

54.13.0081
(2 x)

1.940.616 –11

1.940.615 –02

28.31.0005
(3 x)

				③
Änderung				②
				①
Ausgabe	20.2.97	2		⓪
	Datum	Gez.	Gepr.	Ges.	Index

Kopie für:

STUDER
REGENSDORF
ZÜRICH

Benennung: D 15 M CONNECTION UNIT

Nummer: 1.940.616 –00

Connection Board D-15M C4DA-Card   1.940.616.00

STUDER
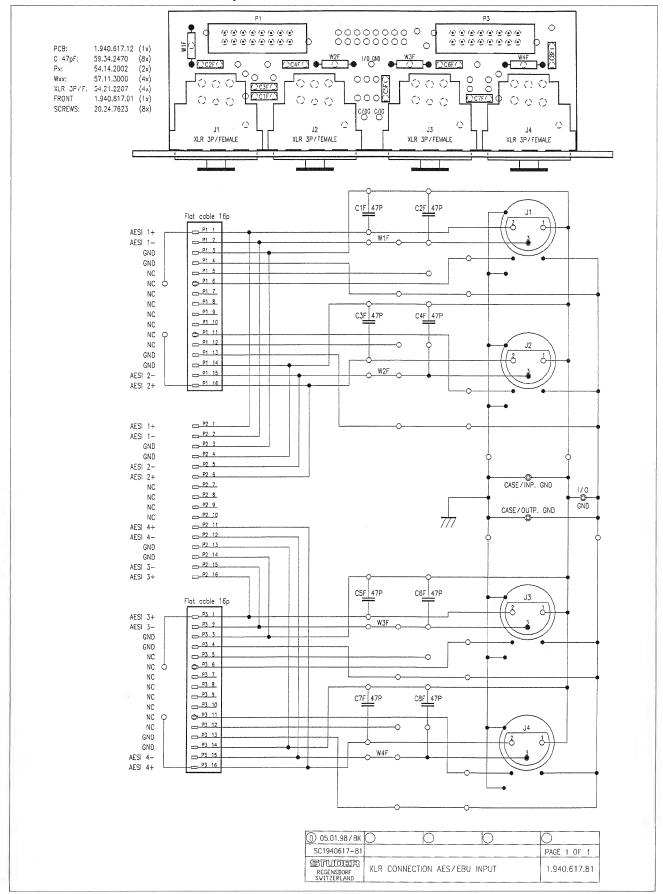
Connection Board D-15M C4DA-Card 1.940.616.00
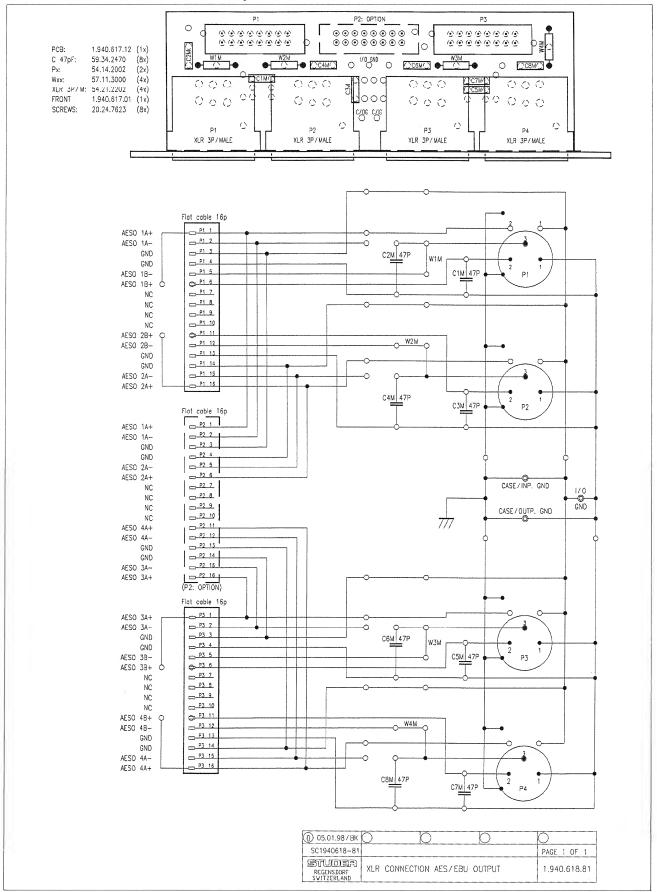
XLR Connection AES / EBU Input   1.940.617.81


```
PCB:         1.940.617.12  (1x)
C 47pF:      59.34.2470    (8x)
Px:          54.14.2002    (2x)
Wxx:         57.11.3000    (4x)
XLR 3P/F.    54.21.2207    (4x)
FRONT        1.940.617.01  (1x)
SCREWS:      20.24.7623    (8x)
```

STUDER
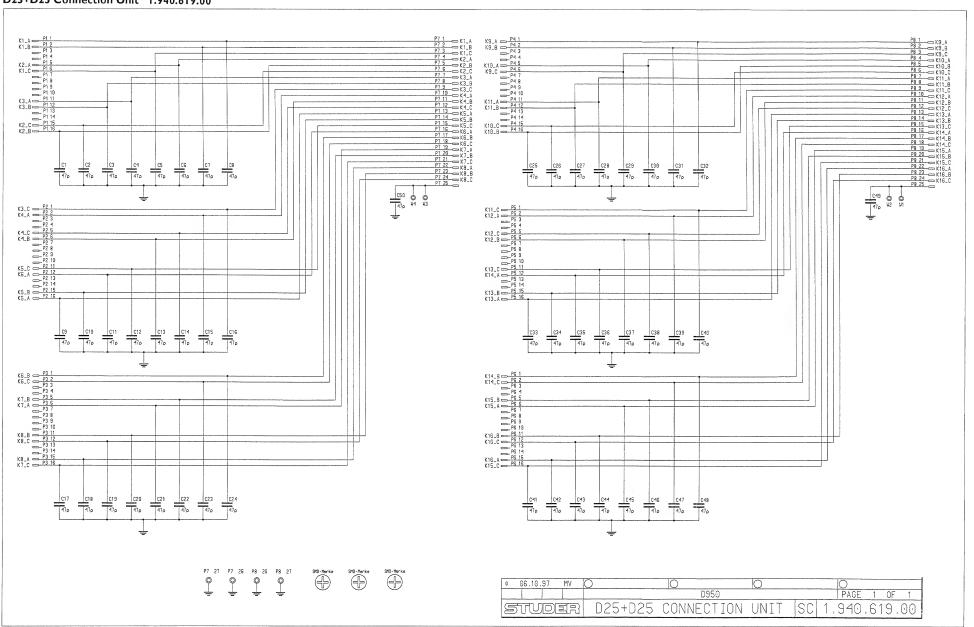
XLR Connection AES / EBU Output   1.940.618.81

D25+D25 Connection Unit 1.940.619.00
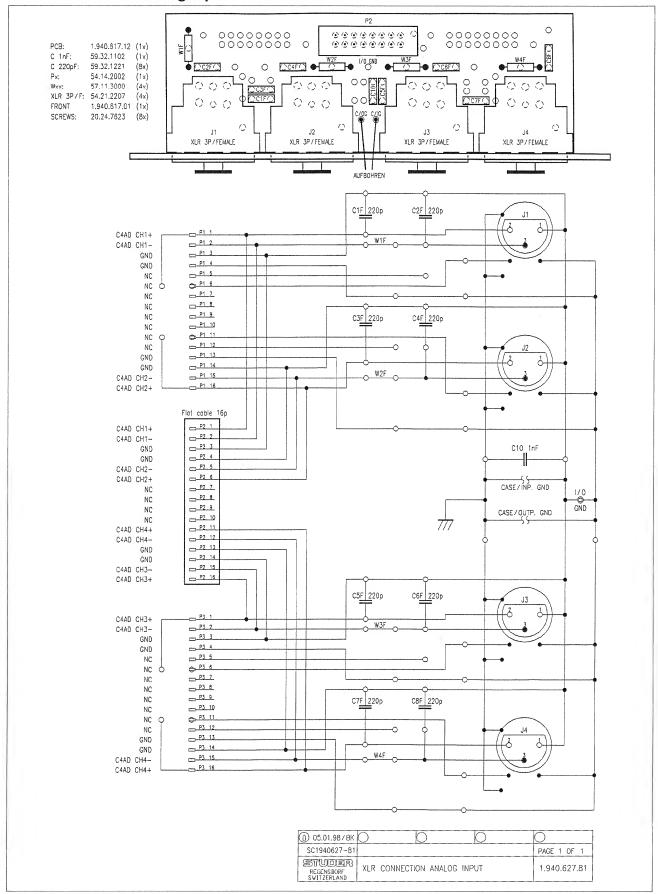
SECTION 10

STUDER

D25+D25 Connection Unit   1.940.619.00

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	C 1	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 2	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 3	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 4	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 5	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 6	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 7	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 8	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 9	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 10	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 11	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 12	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 13	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 14	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 15	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 16	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 17	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 18	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 19	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 20	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 21	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 22	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 23	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 24	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 25	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 26	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 27	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 28	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 29	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 30	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 31	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 32	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 33	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 34	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 35	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 36	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 37	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 38	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 39	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 40	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 41	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 42	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 43	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 44	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 45	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 46	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 47	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 48	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 49	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 50	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	MP 1	1.940.619.11	1 pce		D25+D25 Connection PCB
0	MP 2	1.940.619.04	1 pce		Nr.-Etikette 5 * 20
0	MP 3	1.940.619.01	1 pce		Rückwand D25+D25
0	MP 4	54.13.0081	4 pcs	4.85mm	Bolzen UNC 4-40
0	P 1	54.14.2102		16p	P STECKER 16 P,AU,VR,GERADE
0	P 2	54.14.2102		16p	P STECKER 16 P,AU,VR,GERADE
0	P 3	54.14.2102		16p	P STECKER 16 P,AU,VR,GERADE
0	P 4	54.14.2102		16p	P STECKER 16 P,AU,VR,GERADE
0	P 5	54.14.2102		16p	P STECKER 16 P,AU,VR,GERADE
0	P 6	54.14.2102		16p	P STECKER 16 P,AU,VR,GERADE
0	P 7	54.13.0073		25p	D-Sub, PCB, Winkel
0	P 8	54.13.0073		25p	D-Sub, PCB, Winkel

———————————— End of List ————————————

Comments

Edition Ausgabe	10.10.97	AF			④

STUDER REGENSDORF   D25+D25 CONNECTION UNIT   1.940.619.00

XLR Connection Analog Input   1.940.627.81

PCB: 1.940.617.12 (1x)
C 1nF: 59.32.1102   (1x)
C 220pF: 59.32.1221   (8x)
Px: 54.14.2002   (1x)
Wvv: 57.11.3000   (4x)
XLR 3P/F: 54.21.2207   (4x)
FRONT   1.940.617.01 (1x)
SCREWS: 20.24.7623   (8x)

① 05.01.98/BK			
SC1940627-81			PAGE 1 OF 1
STUDER REGENSDORF SWITZERLAND	XLR CONNECTION ANALOG INPUT		1.940.627.81

STUDER

XLR Connection Analog Output 1.940.628.81

PCB:	1.940.617.12	(1x)
C 1nF:	59.32.1102	(1x)
C 220pF:	59.32.1221	(8x)
Px:	54.14.2002	(1x)
Wxx:	57.11.3000	(8x)
XLR 3P/M:	54.21.2202	(4x)
FRONT	1.940.617.01	(1x)
SCREWS:	20.24.7623	(8x)

05.01.98/BK				
SC1940628-81				PAGE 1 OF 1
STUDER REGENSDORF SWITZERLAND	XLR CONNECTION ANALOG OUTPUT			1.940.628.81

Connection Board 2xD-15F 8x AESI-Card   1.940.635.00

Connection Board 2xD-15F 8x AESI-Card 1.940.635.00

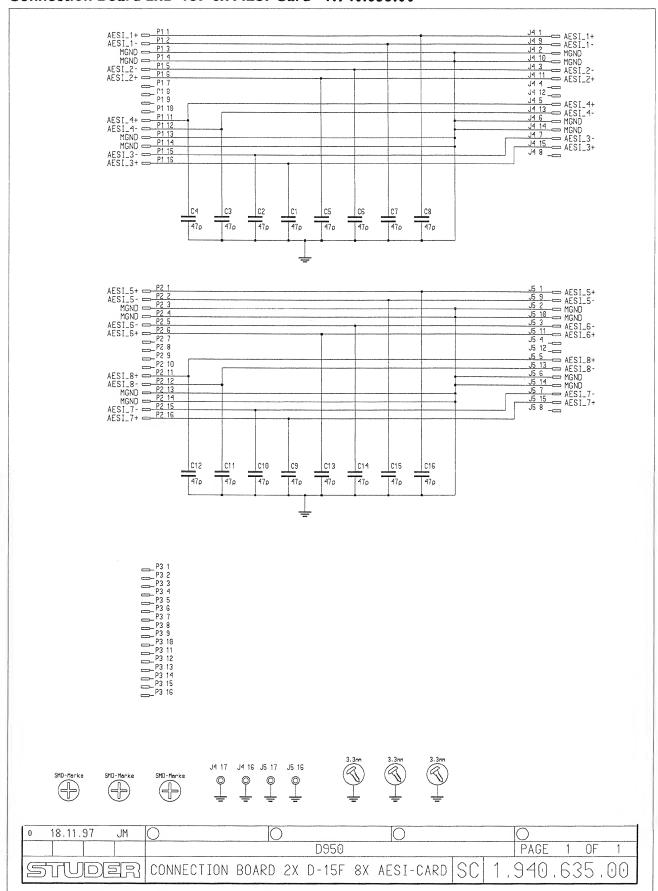| Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	C 1	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 2	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 3	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 4	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 5	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 6	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 7	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 8	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 9	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 10	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 11	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 12	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 13	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 14	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 15	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 16	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	J 4	54.13.0072		15p	D-Sub, PCB, Winkel
0	J 5	54.13.0072		15p	D-Sub, PCB, Winkel
0	MP 1	1.940.635.11	1 pce		Connection 2xD-15F 8xAESI PCB
0	MP 2	1.940.635.04	1 pce		Nr.-Etikette 5 * 20
0	MP 3	1.940.615.01	1 pce		Rückwand D15+D15
0	MP 4	54.13.0081	4 pcs	4.85mm	Bolzen UNC 4-40
0	MP 5	28.31.0005	3 pcs		BLINDNIETE, D 3.2* 6.1
0	P 1	54.14.2002		16p	1/20" Au, gerade, ohne Verrieg
0	P 2	54.14.2002		16p	1/20" Au, gerade, ohne Verrieg
0	P 3	not used		16p	1/20" Au, gerade, ohne Verrieg
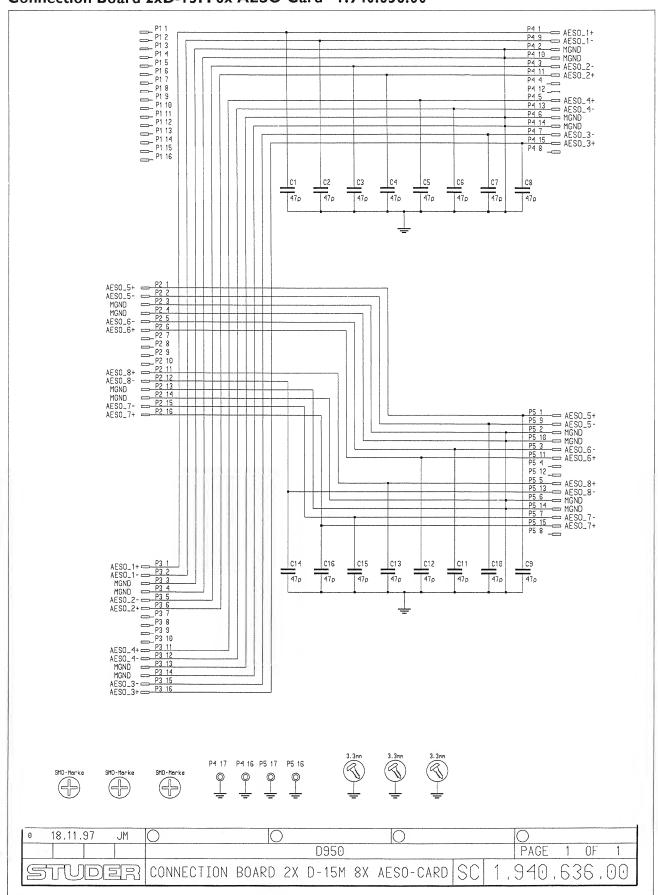
———————————— End of List ————————————

Comments

Modification Aenderung		.	.			③
			.	.		②
		.		.		①
Edition Ausgabe	18.11.97	AF	*fn*	*fn*		⓪
	Date Datum	Visa Gez.	Checked Gepr.	Seen Ges.		Index
Copy to: Kopie fuer: ·						

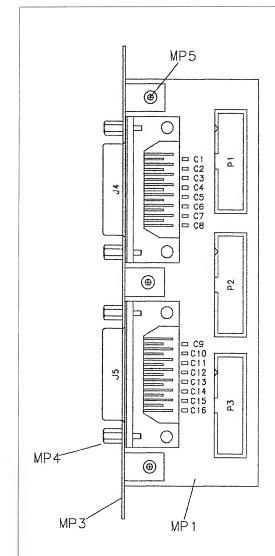| **STUDER** REGENSDORF	Description: Benennung: CONNECTION BOARD 2X D-15F 8X AESI-CARD	Number: Nummer: 1.940.635.00
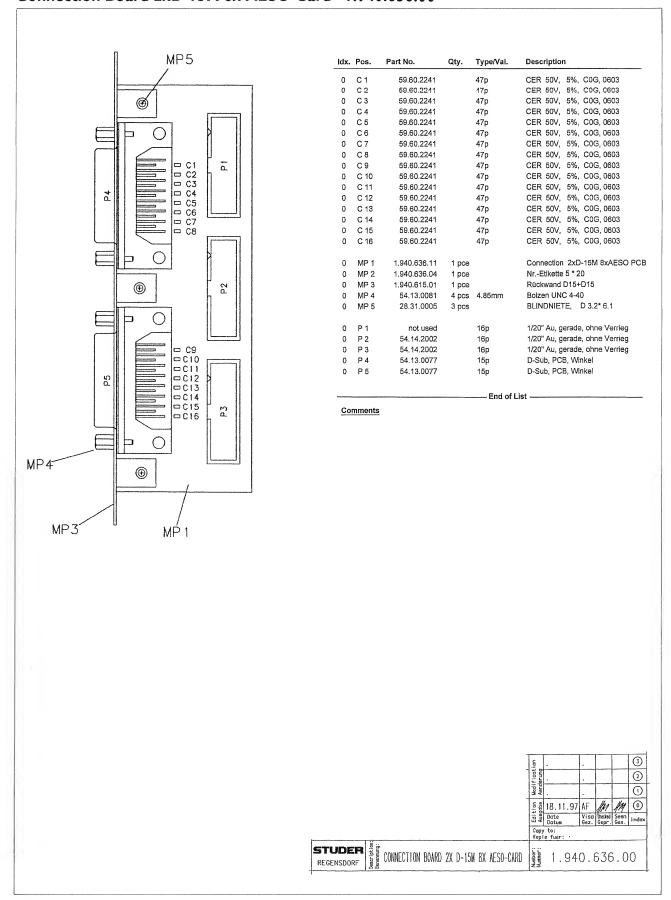
Connection Board 2xD-15M 8x AESO-Card 1.940.636.00

Connection Board 2xD-15M 8x AESO-Card   1.940.636.00

Idx.	Pos.	Part No.	Qty.	Type/Val.	Description
0	C 1	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 2	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 3	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 4	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 5	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 6	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 7	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 8	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 9	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 10	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 11	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 12	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 13	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 14	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 15	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	C 16	59.60.2241		47p	CER 50V, 5%, C0G, 0603
0	MP 1	1.940.636.11	1 pce		Connection 2xD-15M 8xAESO PCB
0	MP 2	1.940.636.04	1 pce		Nr.-Etikette 5 * 20
0	MP 3	1.940.615.01	1 pce		Rückwand D15+D15
0	MP 4	54.13.0081	4 pcs	4.85mm	Bolzen UNC 4-40
0	MP 5	28.31.0005	3 pcs		BLINDNIETE, D 3.2* 6.1
0	P 1	not used		16p	1/20" Au, gerade, ohne Verrieg
0	P 2	54.14.2002		16p	1/20" Au, gerade, ohne Verrieg
0	P 3	54.14.2002		16p	1/20" Au, gerade, ohne Verrieg
0	P 4	54.13.0077		15p	D-Sub, PCB, Winkel
0	P 5	54.13.0077		15p	D-Sub, PCB, Winkel

──────────────── End of List ────────────────

Comments

	Modification Aenderung		.	.			③
			.	.			②
			.	.			①
	Edition Ausgabe	18.11.97	AF				⓪
		Date Datum	Visa Gez.	Checked Gepr.	Seen Ges.	Index

Copy to:
Kopie fuer: ·

STUDER REGENSDORF	Description: Benennung: CONNECTION BOARD 2X D-15M 8X AESO-CARD	Number: Nummer: 1.940.636.00

XLR Connection 4x AES / EBU Input   1.940.637.81


```
PCB:       1.940.617.12  (1x)
C 47pF:    59.34.2470    (8x)
Px:        54.14.2002    (1x)
Wxx:       57.11.3000    (4x)
XLR 3P/F:  54.21.2207    (4x)
FRONT      1.940.617.01  (1x)
SCREWS:    20.24.7623    (8x)
```

06.01.98/BK				
SC1940637-81				PAGE 1 OF 1
STUDER REGENSDORF SWITZERLAND	XLR CONNECTION 4x AES/EBU INPUT			1.940.637.81

XLR Connection 4x AES / EBU Output   1.940.638.81

PCB: 1.940.617.12 (1x)
C 47pF: 59.34.2470   (8x)
Px: 54.14.2002   (1x)
Wxx: 57.11.3000   (8x)
XLR 3P/M: 54.21.2202 (4x)
FRONT   1.940.617.01 (1x)
SCREWS: 20.24.7623 (8x)

P1 XLR 3P/MALE
P2 XLR 3P/MALE
P3 XLR 3P/MALE
P4 XLR 3P/MALE

AESO 1+
AESO 1-
GND
GND
AESO 2-
AESO 2+
NC
NC
NC
NC
AESO 4+
AESO 4-
GND
GND
AESO 3-
AESO 3+

Flat cable 16p

CASE/INP. GND
CASE/OUTP. GND
I/O GND

C2F 47P
C4F 47P
C6F 47P
C8F 47P
C1M 47P
C3M 47P
C5M 47P
C7M 47P

06.01.98/BK				
SC1940638-81				PAGE 1 OF 1
STUDER REGENSDORF SWITZERLAND	XLR CONNECTION 4x AES/EBU OUTPUT			1.940.638.81